



DRAWING NOTES


- ① REMOVE EXISTING SINGLE POLE SWITCH AND REPLACE WITH 3-WAY SWITCH AS INDICATED. PROVIDE ALL WIRE AND CONDUIT AND MAKE ALL CONNECTIONS TO EXISTING LIGHTING FIXTURES AS REQUIRED.
- ② PROVIDE 3-WAY SWITCHES AS INDICATED. RUN SURFACE MOUNTED RACEWAY FOR CONNECTION TO 3-WAY SWITCHES. PROVIDE ALL WIRE AND CONDUIT AND MAKE ALL CONNECTIONS TO EXISTING LIGHTING FIXTURES AS REQUIRED.
- ③ PROVIDE 2'X4' FLUORESCENT STATIC TROFFER LIGHTING FIXTURE, RECESSED MOUNTED, WITH DIE-FORMED STEEL HOUSING, BAKED WHITE ENAMEL FINISH, REGRESSED ALUMINUM DOOR FRAME, PATTERN A12 .125" THICK ACRYLIC PRISMATIC LENS AND ELECTRONIC BALLAST. LIGHTING FIXTURE SHALL BE COLUMBIA MODEL NO. ST824-332G-RA A12.125-EBB, OR APPROVED EQUAL. VERIFY IF LIGHTING IS EITHER 120 OR 277 VOLTS.
- ④ CONNECT TO EXISTING LIGHT CIRCUIT SERVING ROOM.
- ⑤ DATA OUTLET & TELEPHONE OUTLET AS NOTED AND ASSOCIATED DATA CABLE & TELEPHONE CABLE COILED AND SUSPENDED AT CEILING SPACE SHALL BE PROVIDED BY OTHERS. EXTEND DATA AND TELEPHONE CABLE TO FLOOR BOX AS SHOWN AND INSTALL DATA AND TELEPHONE OUTLETS IN FLOOR BOX. REFER TO DETAILS 2/G1.3 AND 3/G1.3 FOR ADDITIONAL INFORMATION.
- ⑥ DATA OUTLET AND DATA CABLE AS NOTED COILED AND SUSPENDED IN CEILING SPACE FOR FUTURE PROJECTOR SHALL BE PROVIDED BY OTHERS.
- ⑦ EXISTING PANEL P2 IS BY SQUARE-D, TYPE NQOB, CATALOG NO. 44-81922-4, 120/208V, 3Ø, 4W, 225A MLO. PROVIDE SINGLE-POLE, 20-AMPERE CIRCUIT BREAKER IN SPACE #41 OF EXISTING PANEL P2 (RIGHT SIDE). CIRCUIT BREAKER TYPE SHALL MATCH EXISTING.

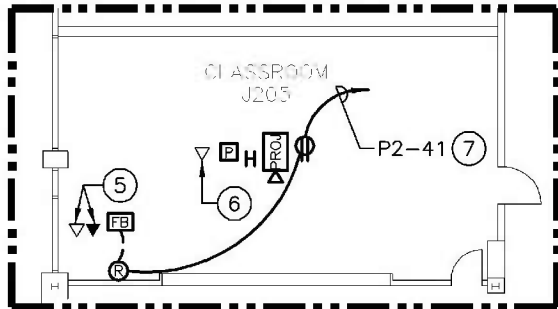

CLASSROOM J205
POWER

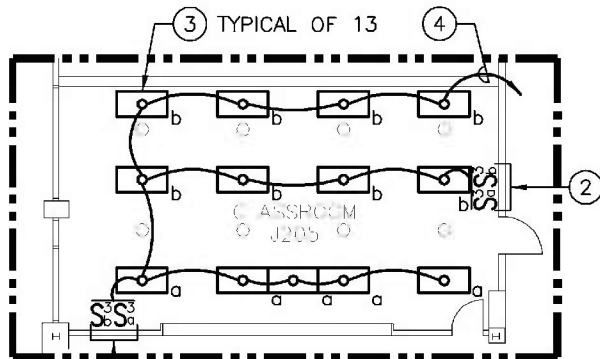


CLASSROOM J205
LIGHTING

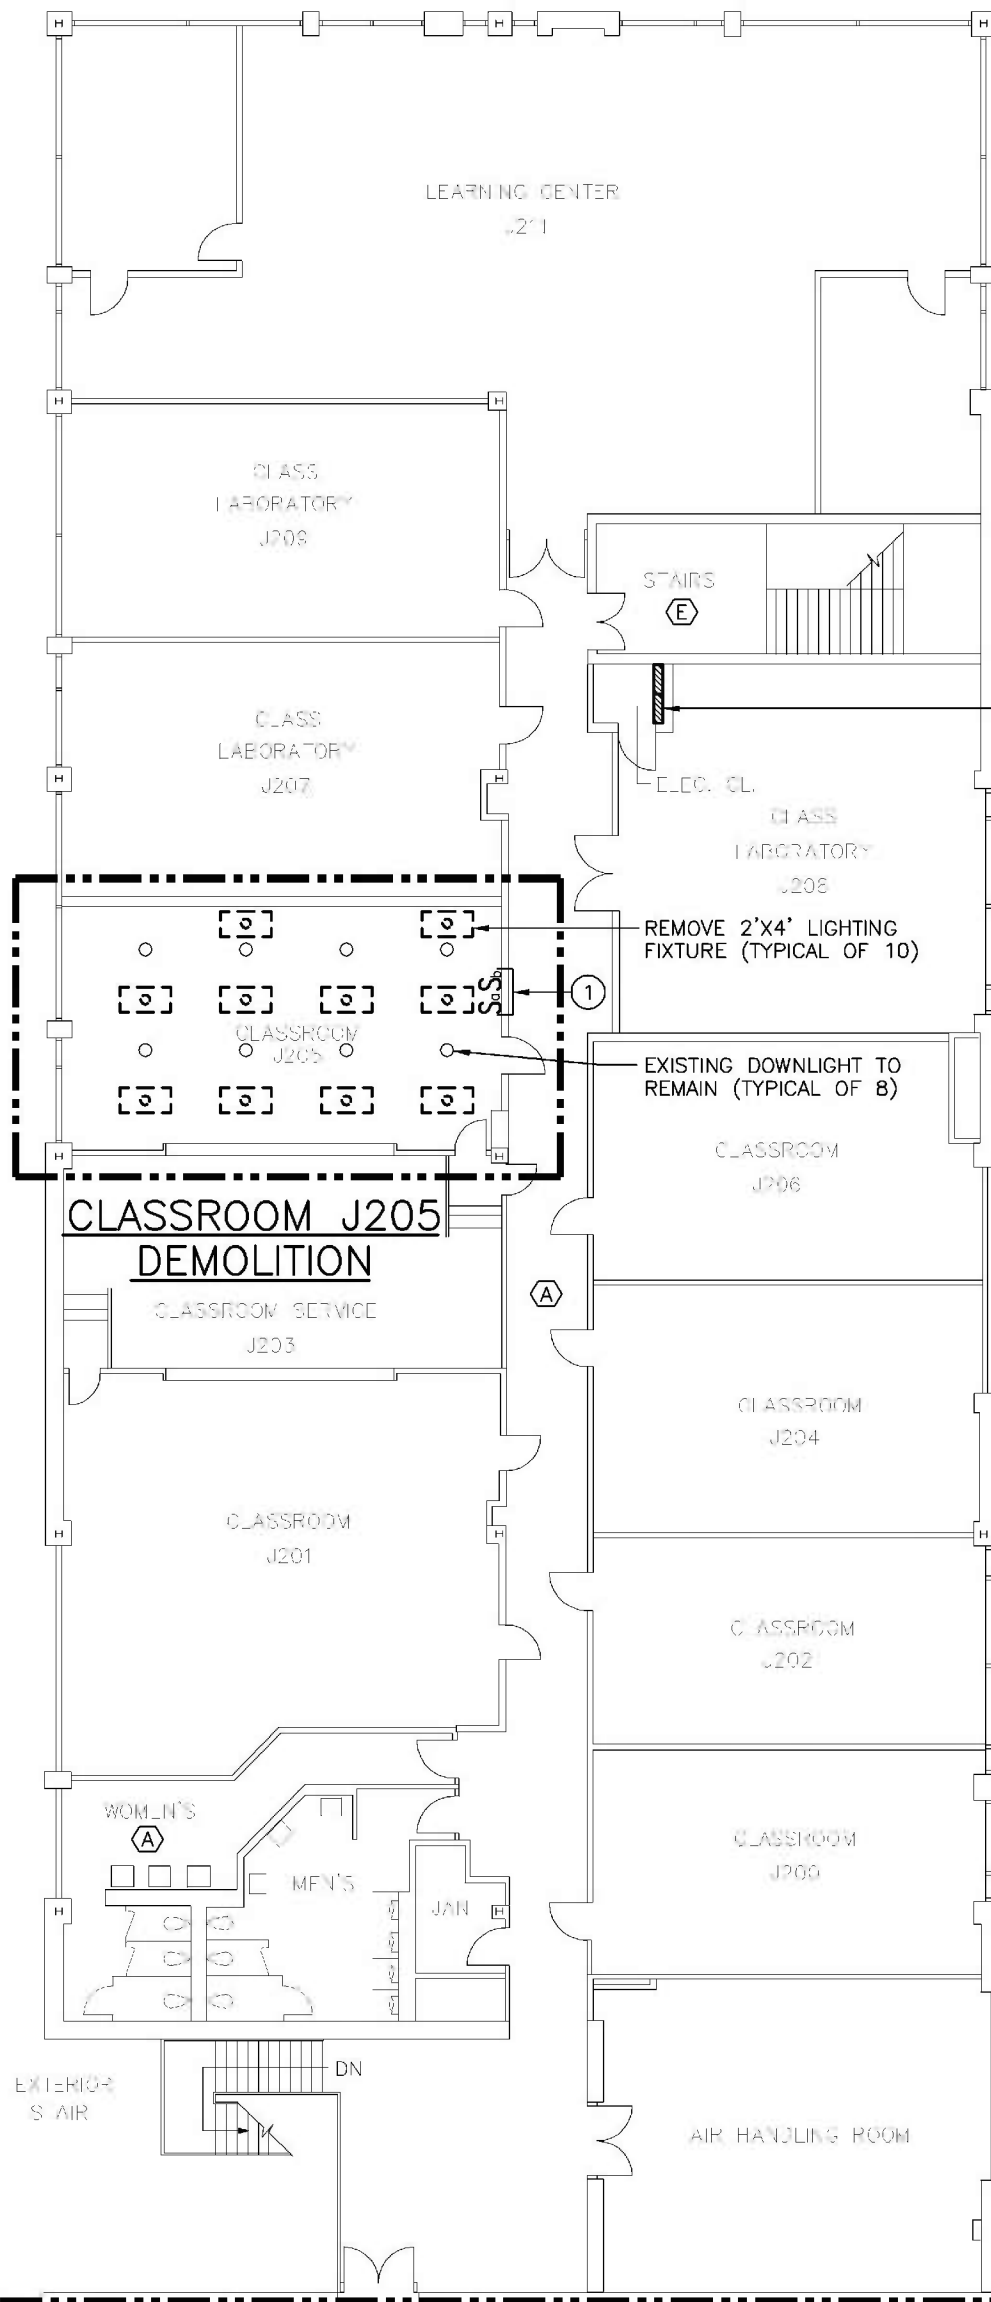

⑦ EX. PANEL P2 (RIGHT-A)
120/208V, 3Ø, 4W, 225A MLO

J BUILDING - SECOND FLOOR PLAN
(FORMERLY CAREER BUILDING (CAR))

SCALE: 3/32" = 1'-0"

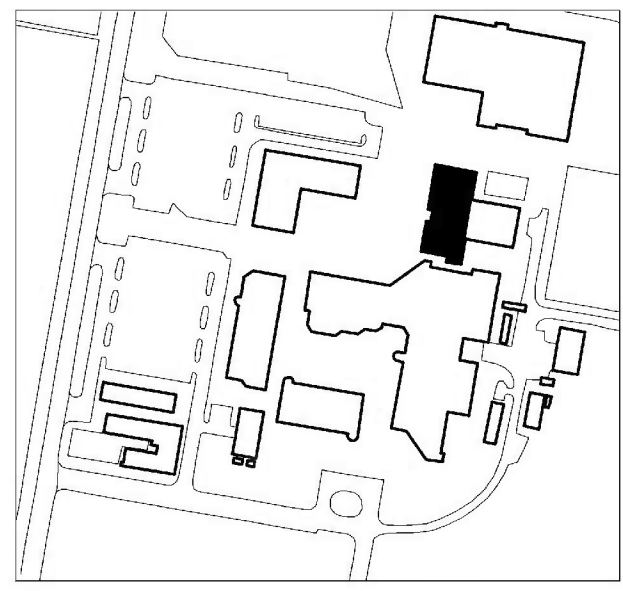





KEY PLAN
NOT TO SCALE

D-034030

ALTERNATE #2

SCALE: 3/32" = 1'-0"

RELEASED FOR	"THIS DRAWING AND THE DESIGN AND CONSTRUCTION FEATURES DISCLOSED ARE PROPRIETARY TO GIPE ASSOCIATES, INC. AND SHALL NOT BE ALTERED OR REUSED IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN PERMISSION OF GIPE ASSOCIATES, INC. Copyright © 2005"	 J. VINTON SCHAFER & SONS, INC. CONSTRUCTION MANAGERS 11150 Pulaski Highway, P.O.Box 226 White Marsh, Maryland 21162-0226 410.335.3000 Fax: 410.335.6529	 Consulting Engineers 849 Fairmount Avenue, Suite 100 Baltimore, Maryland 21286 (410) 512-4500 WHITNEY, BAILEY, COX & MAGNANI, LLC	 GIPE ASSOCIATES, INC. Consulting Engineers 849 FAIRMOUNT AVENUE, SUITE 102 BALTIMORE, MARYLAND 21286 (410) 832-2420 tel (410) 832-2418 fax W.O.# Q4Q56A	 CCBC The Community College of Baltimore County CCBC PROJECT No. 051905A	THE COMMUNITY COLLEGE OF BALTIMORE COUNTY TELECOMMUNICATIONS/ INFRASTRUCTURE PHASE 3 – PACKAGE A SMART CLASSROOMS	Project Q4Q56A	Date 4/28/2005	CCBC DUNDALK BUILDING FLOOR PLAN											
<input type="checkbox"/> PRELIMINARY ONLY							Drawn by JLP/PJM	Checked by JWW/PJM		Revisions <table><tr><th>Date</th><th>Item</th></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr><tr><td> </td><td> </td></tr></table>	Date	Item								
Date							Item													
<input checked="" type="checkbox"/> BIDDING	Drawing Number ED3.2																			
<input type="checkbox"/> PERMIT																				
<input type="checkbox"/> CONSTRUCTION																				
DATE: 4/28/2005																				