MONTGOMERY COUNTY, MARYLAND
DEPARTMENT OF TRANSPORTATION

INTERSECTION IMPROVEMENT

ASPEN HILL RD. & VEIRS MILL RD.

PROJECT No. 703117

INDEX OF SHEETS

1 Cover Sheet
2 Plan
3 Plan, Storm Drain Profiles

SEDIMENT CONTROL NOTES

1. All sodding must be in accordance with the "Standards and Specifications for Soil Erosion and Sediment Control in Developing Areas," pages 54.01 through 54.04 as approved and adopted by the State of Maryland Department of Natural Resources.
2. Construction equipment shall not track mud onto public ways.
3. Straw bales shall be placed around inlet No. 3 until side slopes are sodded and roadway pavement is in place.

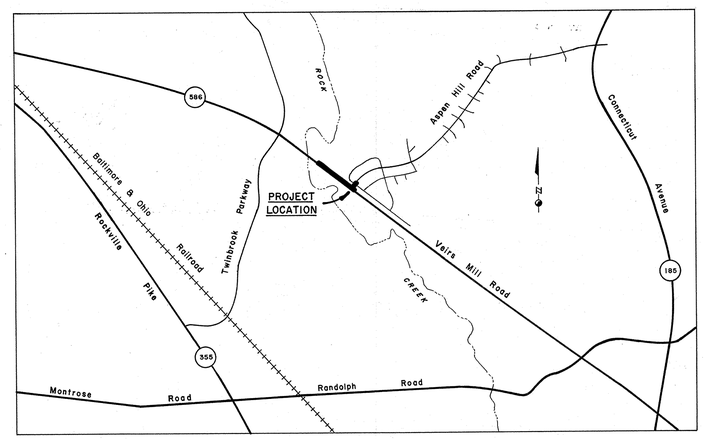

VICINITY MAP
SCALE: 1" = 2000'

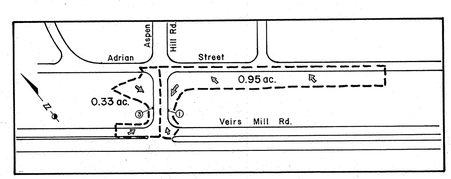

DRAINAGE AREA MAP
SCALE: 1" = 200'

GENERAL NOTES FOR STORM DRAIN CONSTRUCTION

1. All Storm Drains shall be constructed in accordance with the latest edition of the General Specifications of the Maryland State Highway Administration and Montgomery County.
2. Types of Structures refer to the Standard Storm Drainage Details of W.S.S.C. and Montgomery County.
3. Use Class "C" bedding in all storm drain pipe trenches.
4. Where the drop in the main line through a structure can be accommodated by an invert slope of 1 1/2 : 1 or flatter, a rounded channel lined with sewer brick on edge shall be built to the crown of the pipes.
5. Modify inlets and "B" manholes per details on Dwg. 3 of 3.

W.S.S.C. PERMIT # 81072
FOR WORK IN PUBLIC SPACE SUBJECT TO PRIOR INSTALLATION OF WATER & SEWER AND PAYMENT FOR ANY ADJUSTMENT OF W.S.S.C. FACILITIES AFFECTED.

MONTGOMERY COUNTY MARYLAND
DEPARTMENT OF TRANSPORTATION
ROCKVILLE, MD.

INTERSECTION IMPROVEMENT

ASPEN HILL RD. & VEIRS MILL RD.

APPROVED

CHIEF, DIV. OF TRANS. ENG'G. — DIRECTOR, DEPT. OF TRANS. — 11/12/80

PROJECT: 703117 — DWG: 1 OF 3

MSA CE 189 61-2