

CAPSULE SUMMARY

CE-1430

Built prior to 1785

**McGlothlin Spring House
171 McGlothlin Road
Conowingo, Cecil County, Maryland**

Dating to the 3rd quarter of the 18th century, the McGlothlin Spring House is an architecturally important and relatively well preserved example of a Delaware Valley stone spring house. Measuring 16' - 2 1/2" by 12' - 1 1/2", with 19"-thick walls laid in uncoursed rubble fieldstone, the building stands over a still-active spring.

Spring houses were a common feature on the 18th and 19th century agricultural landscape, especially in this part of Maryland where farm butter production was of major importance to the regional economy. Designed to store and extend the freshness of perishable dairy products, spring water, contained by a low trough, circulated through the building. Into this trough were placed earthenware pans, jars, etc. containing milk, butter and other perishables. The cool spring water, low specific heat of the ceramics, and the insulation provided by thick-walled buildings provided an effective means of preservation in the era before easy access to ice or refrigeration.

Maryland Historical Trust State Historic Sites Inventory Form

MARYLAND INVENTORY OF HISTORIC PROPERTIES

Magi No.

DOE yes no

1. Name (indicate preferred name)

historic

and/or common McGlothlin Spring House (Preferred)

2. Location

street & number 171 McGlothlin Road N/A not for publicationcity, town Conowingo _____ vicinity of 1st congressional district (7th Election District)state Maryland county Cecil County

3. Classification

Category	Ownership	Status	Present Use	
<input type="checkbox"/> district	<input type="checkbox"/> public	<input type="checkbox"/> occupied	<input checked="" type="checkbox"/> agriculture	<input type="checkbox"/> museum
<input type="checkbox"/> building(s)	<input checked="" type="checkbox"/> private	<input checked="" type="checkbox"/> unoccupied	<input type="checkbox"/> commercial	<input type="checkbox"/> park
<input checked="" type="checkbox"/> structure	<input type="checkbox"/> both	<input type="checkbox"/> work in progress	<input type="checkbox"/> educational	<input checked="" type="checkbox"/> private residence
<input type="checkbox"/> site	Public Acquisition	Accessible	<input type="checkbox"/> entertainment	<input type="checkbox"/> religious
<input type="checkbox"/> object	<input type="checkbox"/> in process	<input checked="" type="checkbox"/> yes: restricted	<input type="checkbox"/> government	<input type="checkbox"/> scientific
	<input type="checkbox"/> being considered	<input type="checkbox"/> yes: unrestricted	<input type="checkbox"/> industrial	<input type="checkbox"/> transportation
	<input checked="" type="checkbox"/> not applicable	<input type="checkbox"/> no	<input type="checkbox"/> military	<input type="checkbox"/> other:

4. Owner of Property (give names and mailing addresses of all owners)

name Ms. Melony Richards and Ronald C. McMullenstreet & number 171 McGlothlin Road telephone no.: 410-378-0012city, town Conowingo state and zip code Maryland 21918

5. Location of Legal Description

courthouse, registry of deeds, etc. Elkton Courthouse liber NDS 378street & number 129 East Main Street folio 735city, town Elkton state Maryland

6. Representation in Existing Historical Surveys

file N/Adate _____ federal state county localdepository for survey records _____city, town _____ state _____

7. Description

Survey No. CE-1430

Condition		Check one	Check one	
<input type="checkbox"/> excellent	<input type="checkbox"/> deteriorated	<input type="checkbox"/> unaltered	<input checked="" type="checkbox"/> original site	
<input type="checkbox"/> good	<input type="checkbox"/> ruins	<input checked="" type="checkbox"/> altered	<input type="checkbox"/> moved	date of move _____
<input checked="" type="checkbox"/> fair	<input type="checkbox"/> unexposed			

Prepare both a summary paragraph and a general description of the resource and its various elements as it exists today.

McGlothlin Spring House

It is believed that the McGlothlin Spring House was constructed prior to 1785. Located in a track of land known as Larkins Desire, the natural spring (still active today) runs through an orchard (apple and peach) from the north, southward and outfalls at the base of a small hill. The spring house was constructed south of the spring outfall. The cool waters of the spring were used to store dairy products. The spring house has a rectangular shape approximately 16' - 2 1/2" by 12' - 1 1/2". A stone retaining wall (height 53") extends from the north (girth) wall, cutting into the hill, encircling the natural spring. There is an earth floor within this stone circle. (See Detail A)

The spring house has a gable roof that extends beyond the north wall approximately 48 inches. The ends of the overhanging gable roof are supported by two wood piers which extend into the ground. The spring is located beyond the end of the gable roof, tucked into the far end of the stone retaining wall. The spring originally was not roofed and exposed to sunlight. (See Detail B) Water flowed by gravity from the spring, on a slight downhill slope along the east stone wall. This water continued out the southeast end of the spring house into a drainage swale and off to the Susquehanna River. The spring house is underpinned with stone walling which averages 19 inches thick. This cellarless building is a fully excavated uncoursed stone structure, composed of roughly cut field stone.

The north elevation wall encloses a hinged left-hand timber door and the south elevation exposes a window. (See Detail C) The interior walls of the stone house appear to be finished with a coating of lime mortar. The exterior walls have the remnants of white wash. It appears the finishing stones at the wall plate/girth, door threshold and single stone window opening were polished (smoothed) to provide a more even finished stone surface. All other stones in the wall appear to be rough cut. The exterior west wall has two small openings cast into the stone. The same or similar openings exist on the interior wall. The purpose of these openings may have been to support beams and a small working table or shelf.

Framing lumber for the wall joists, plates, girths, window/door sill, header and jambs are all cut plank lumber. Wrought nails were observed at exterior wall planking, window, door and roof framing. The wrought nails are tapered on 3 or 4 sides with flattened rose petal heads. This seems to indicate construction of the spring house pre-dates 1800. Ceiling joists appear to be notched (lap joint) into the plate planks. Lap joint connections were observed between the plate and girth boards. No observations were made on the method of connection between the plate/girth boards and masonry wall.

McGlothlin Spring House, Survey No. CE-1430
Cecil County
Description 7.1

The roof rafters are constructed of sawn lumber (approximately 1:2 pitch) unevenly spaced along the length of the building. Each rafter is notched where it rests on the plate. The crown of the gable rafter is mitered and nailed. (See Detail D) The end rafters of the gable roof are supported by studs (10 each) extending from the girth boards to the end gable rafter. The rafters are connected with plank boards (12 total) which average one inch thick. The plank boards are spaced along the rafters. The plank boards are covered with a standing seam (9 total) tin roof. The gable ends of the exterior wall are closed with vertical sawn boards (14 each) approximately one inch thick. A diamond shaped opening exists at the crown of each end. (See Detail C, D and E)

A single door constructed of three sawn wood boards is hung in place by two plain wrought iron hinges attached to the door planks by a head and base board (all approximately one inch thick). These hinges are the strap or hook and eye hinge. The pivot post for the hinges is nailed (spiked) into the doorjamb. The door has remains of a metal post and metal plate with an iron bar hook lock. The hinges are connected to the door with wrought iron nails.

The ceiling of the spring house is constructed of boards that extend beyond the interior vertical face of the stone walls. The boards are tightly butted up to one another. The ceiling was painted blue.

The McGlothlin family purchased the farm in 1921. It is believed the spring house remained as originally constructed until this time. During the construction of the Conowingo Dam, it is said, Mr. McGlothlin obtained concrete from this project in 1924 and built the concrete channels in the spring house as they exist today. In 1930, Mr. McGlothlin extended the roof over the spring and stone retaining wall. This extended roof has collapsed.

In 1966, owner, Mr. Clarence Comer, installed a concrete liner around the natural spring and added a sump pump and piping to the main house. This water system was in use until the late 70's, until the Health Department considered the water source inappropriate.

Detail F locates the spring house as it was documented by Welsh Engineering, dated April 4, 1994.

8. Significance

Survey No. CE-1430

Period	Areas of Significance—Check and justify below			
<input type="checkbox"/> prehistoric	<input type="checkbox"/> archeology-prehistoric	<input type="checkbox"/> community planning	<input type="checkbox"/> landscape architecture	<input type="checkbox"/> religion
<input type="checkbox"/> 1400-1499	<input type="checkbox"/> archeology-historic	<input type="checkbox"/> conservation	<input type="checkbox"/> law	<input type="checkbox"/> science
<input type="checkbox"/> 1500-1599	<input checked="" type="checkbox"/> agriculture	<input type="checkbox"/> economics	<input type="checkbox"/> literature	<input type="checkbox"/> sculpture
<input type="checkbox"/> 1600-1699	<input type="checkbox"/> architecture	<input type="checkbox"/> education	<input type="checkbox"/> military	<input type="checkbox"/> social/
<input checked="" type="checkbox"/> 1700-1799	<input type="checkbox"/> art	<input type="checkbox"/> engineering	<input type="checkbox"/> music	<input type="checkbox"/> humanitarian
<input type="checkbox"/> 1800-1899	<input type="checkbox"/> commerce	<input type="checkbox"/> exploration/settlement	<input type="checkbox"/> philosophy	<input type="checkbox"/> theater
<input type="checkbox"/> 1900-	<input type="checkbox"/> communications	<input type="checkbox"/> industry	<input type="checkbox"/> politics/government	<input type="checkbox"/> transportation
		<input type="checkbox"/> invention		<input type="checkbox"/> other (specify)

Specific dates

Builder/Architect

check: Applicable Criteria: A B C D
and/or

Applicable Exception: A B C D E F G

Level of Significance: national state local

Prepare both a summary paragraph of significance and a general statement of history and support.

Located in the Delaware Valley, spring houses were common where farm butter production constituted a major element in the local economy. The spring house was used to store perishable dairy products in earthenware milk pans, tubs and jars. The spring house served the main house which is located approximately 250 lf due west. The following record of deed ownership is so noted:

1. 1677
John Larkin patent Larkins Desire, 300 AC. (See Detail G)
Liber 20
Folio 64
 2. 1740 - 1745
Property owned by Robert Duvall. No recorded deed.
Referenced in Liber BW #2, Folio 54, 55, 56, 57, 58, 59
 3. 1755
Property was purchased by Thomas Shepard and Samuel Patterson. No recorded deed. Referenced in Liber BW #2, Folio 54, 55, 56, 57, 58, 59
- Footnote:
- Suspect Shepard died first, leaving land to Patterson.
4. April 23, 1785
First recorded deed. Thomas Shepard and heirs owned property given to them by his father Samuel Patterson, Liber BW #2, Folio 54, 55, 56, 57, 58, 59
1781 - 1803 Land Commission Record of Deed Book
 5. May 17, 1824
James and Catherine Broughton and John and Frances Clark inherited property from Samuel Patterson. (See Detail H)
Liber JS 22
Folio 97

McGlothlin Spring House, Survey No. CE-1430
Cecil County
Significance 8.1

Footnote: Suspect Patterson had two daughters, Catherine and Frances. Land was split between these two families. The McGlothlin spring house is located on the Broughton property.

6. December 24, 1867 Catherine Broughton sold a parcel of land along the river to George B. Roberts of Philadelphia for the railroad.
Liber HRT #3
Folio 191

Footnote: Suspect Catherine Broughton died between 1867 – 1893.

7. January 12, 1893 Alexander Broughton sued Ann Isabela Broughton and purchased the land.
Liber JTG #2
Folio 330

8. February 21, 1914 Alexander Broughton defaulted on mortgage and sold property to Emma A. Armstrong in a public sale.
Liber CK 8
Folio 216

9. April 5, 1921 Emma and Thomas Armstrong sold the property to J. P. McGlothlin.
Liber HWL #4
Folio 312

Footnote: McGlothlin family immigrated in the 1700's to Appalachia, where John Patton McGlothlin was a Postmaster and a school teacher. In 1921, the McGlothlin's moved to Conowingo and began farming. (See Detail I)

10. May 1965 Clarence Comer purchased the property from J. P. McGlothlin's estate. (See Detail J)
Liber NDS 35
Folio 696

11. September 27, 1991 H. Barry Montgomery purchased the land from Clarence Comer.
Liber NDS 357
Folio 489

McGlothlin Spring House, Survey No. CE-1430
Cecil County
Significance 8.2

12. April 6, 1992 Melony Richards purchased the property from H. Barry
Montgomery. (See Detail K)
Liber NDS 378
Folio 735

Footnote: McGlothlin is Melony Richards' grandfather.

9. Major Bibliographical References

Survey No. CE-1430

Interview with Ms. Melony Richards (Owner)
Historical Society of Cecil County, 135 East Main Street, Elkton, MD
410-398-1790

10. Geographical Data

Acreeage of nominated property 1/10 AC

Quadrangle name _____

Quadrangle scale _____

UTM References do NOT complete UTM references

A

Zone	Easting			Northing					

B

Zone	Easting			Northing					

C

Zone	Easting			Northing					

D

Zone	Easting			Northing					

E

Zone	Easting			Northing					

F

Zone	Easting			Northing					

G

Zone	Easting			Northing					

H

Zone	Easting			Northing					

Verbal boundary description and justification

Owner holds title.
See Welsh Engineering Survey, Dated April 9, 1994

List all states and counties for properties overlapping state or county boundaries

state N/A code county code

state code county code

11. Form Prepared By

name/title Stephen A. Johanson

organization CRL of Maryland, Inc. date December 17, 1998

street & number 152-F Blades Lane telephone 410-760-2000

city or town Glen Burnie state Maryland 21060


The Maryland Historic Sites Inventory was officially created by an Act of the Maryland Legislature to be found in the Annotated Code of Maryland, Article 41, Section 181 KA, 1974 supplement.


The survey and inventory are being prepared for information and record purposes only and do not constitute any infringement of individual property rights.

return to: ~~Maryland Historical Trust~~
Shaw House
21 State Circle
Annapolis, Maryland 21401
(301) 269-2438

MARYLAND HISTORICAL TRUST
DHCP/DHCD
100 COMMUNITY PLACE
CROWNSVILLE, MD 21032-2023
514-7600

SURVEY No. CE-1430

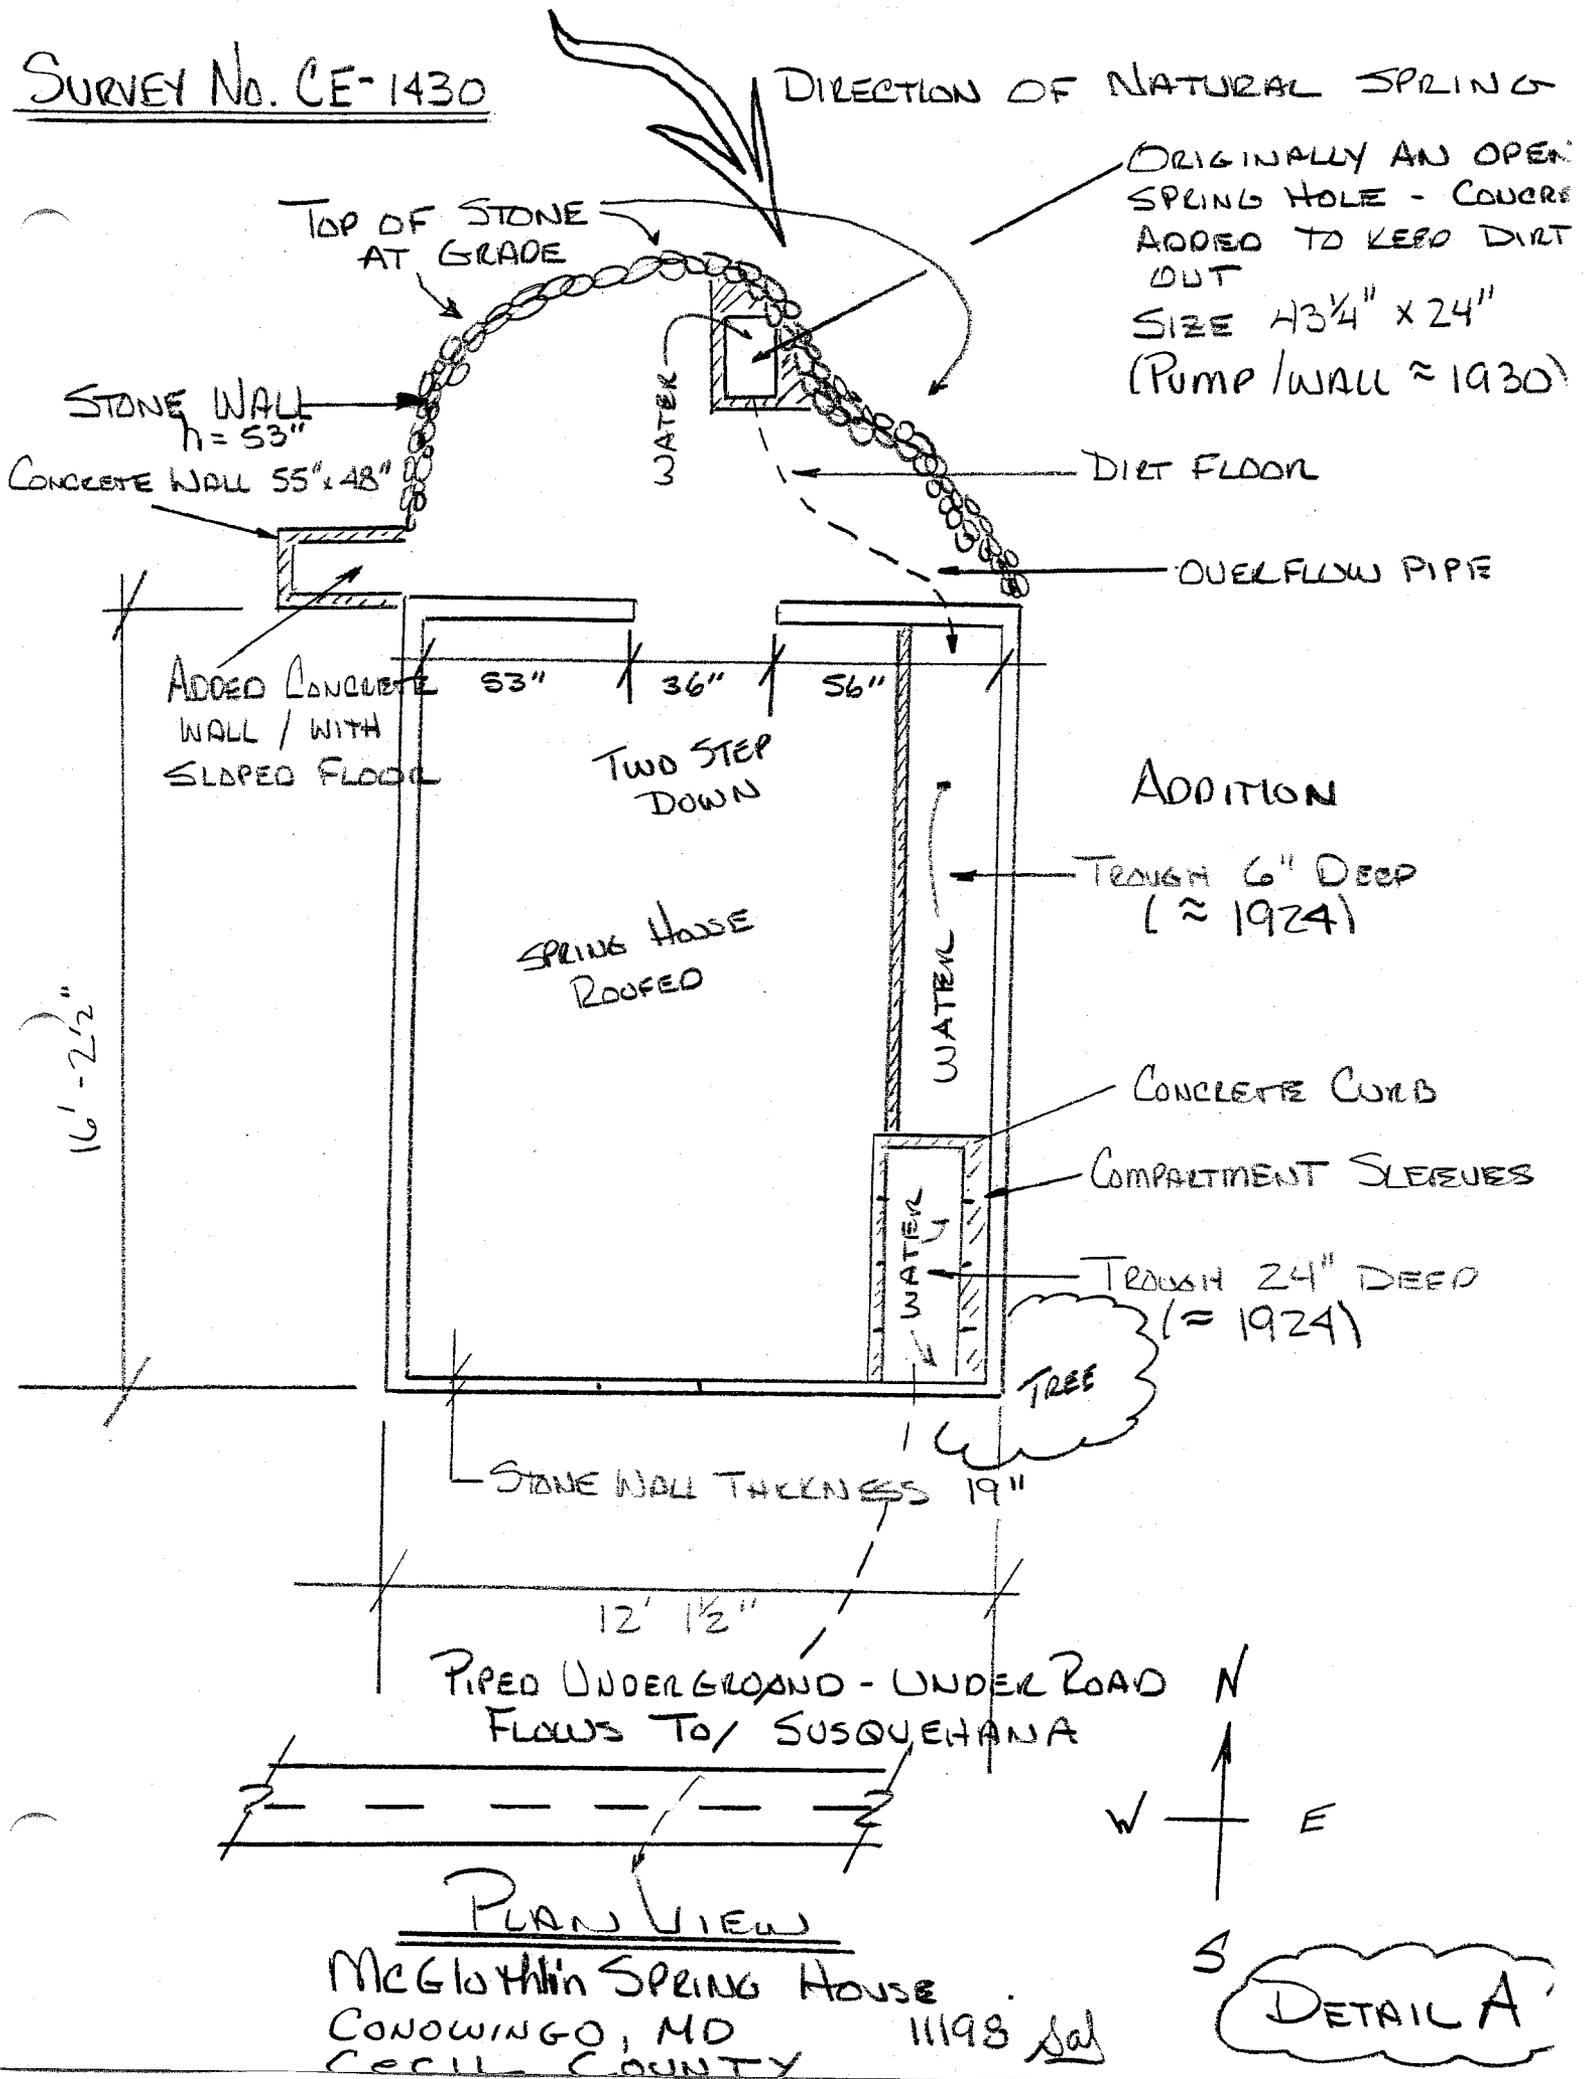


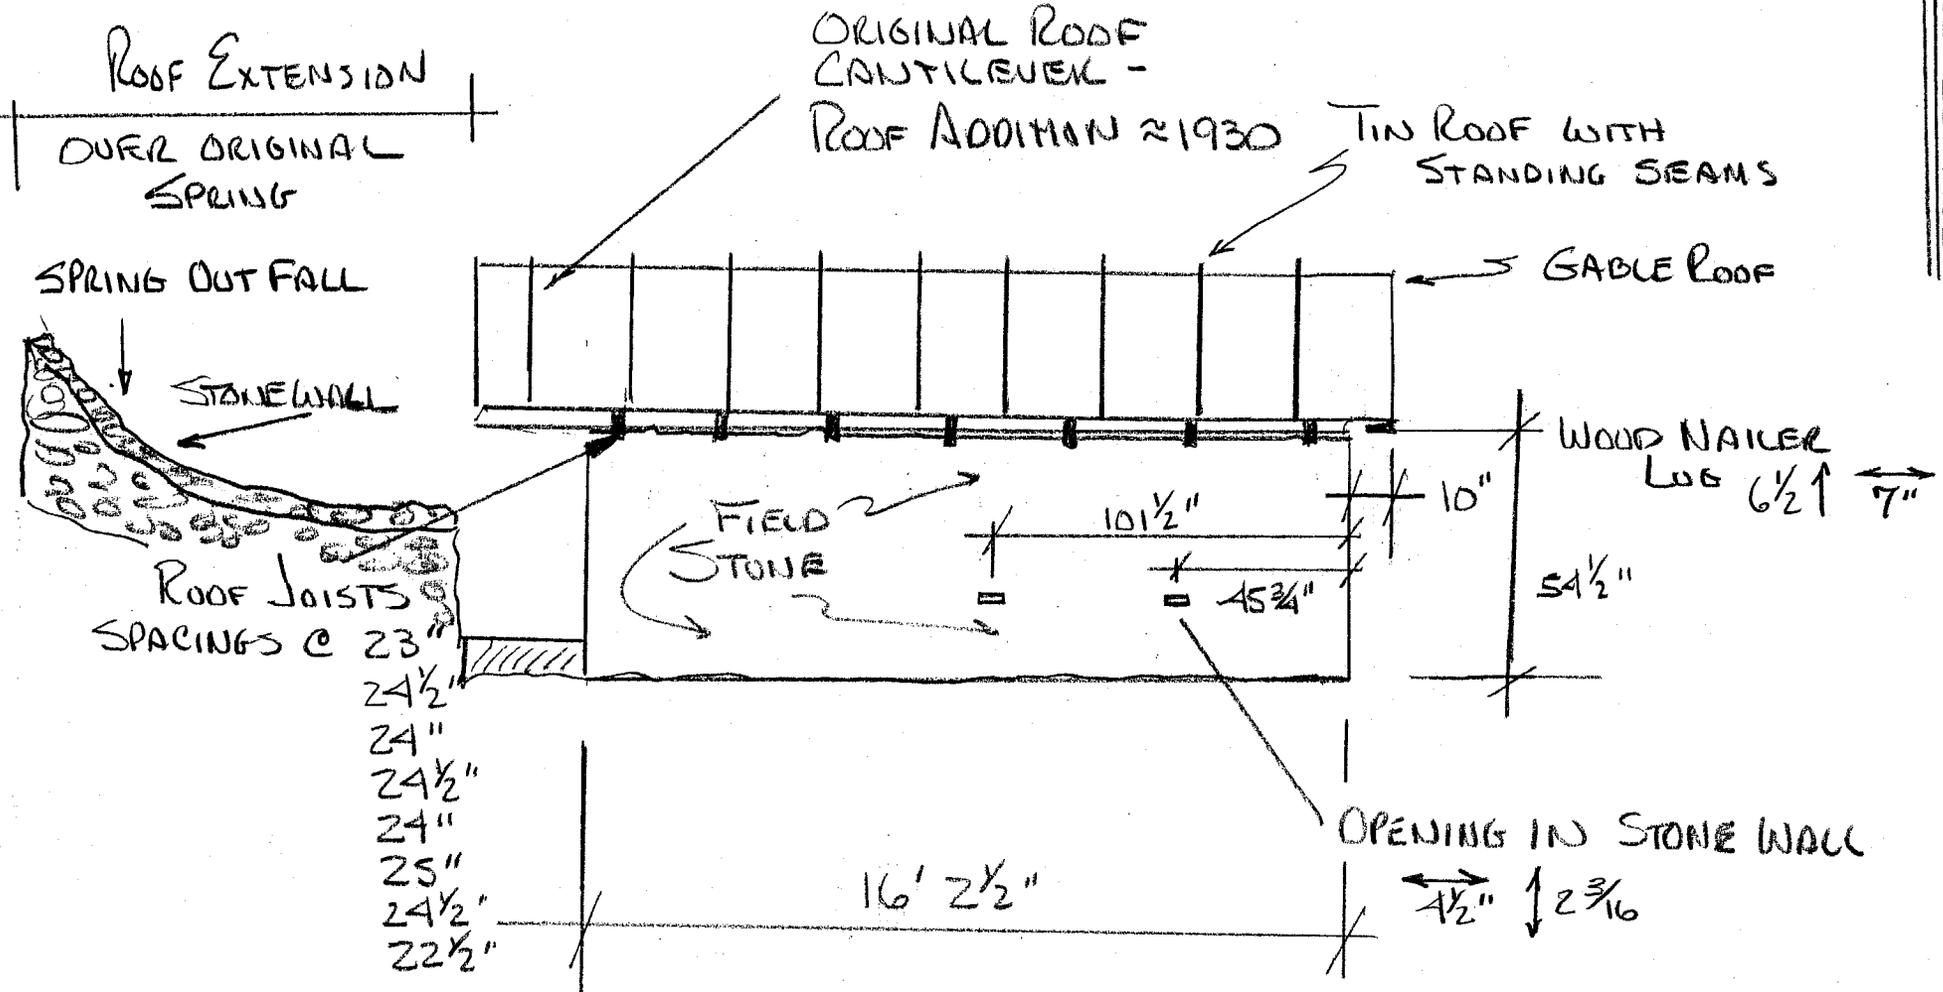


WEST ELEVATION

McGlothlin Spring House

11/98' - Sal
 DETAIL B } CONAWINGO, MO
 Pearl County

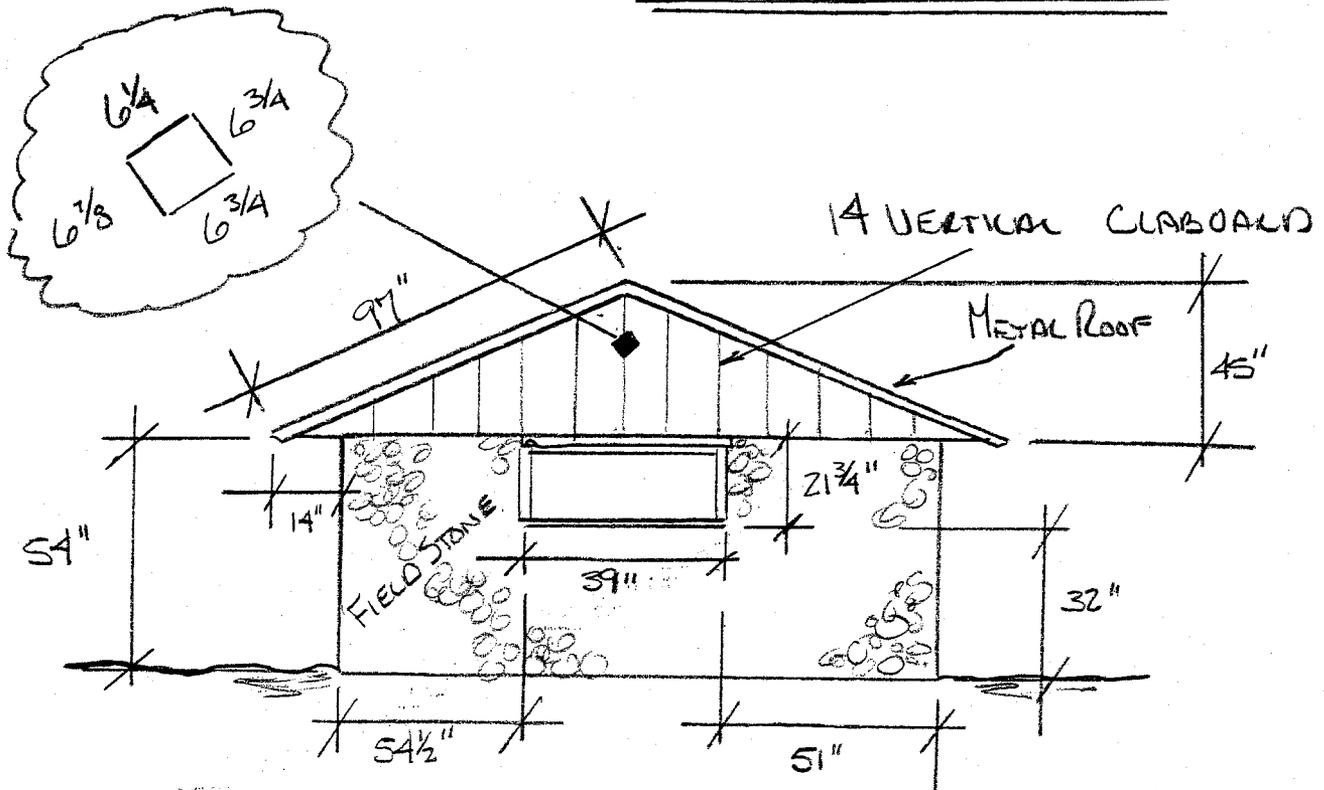


SOUTH ELEVATION

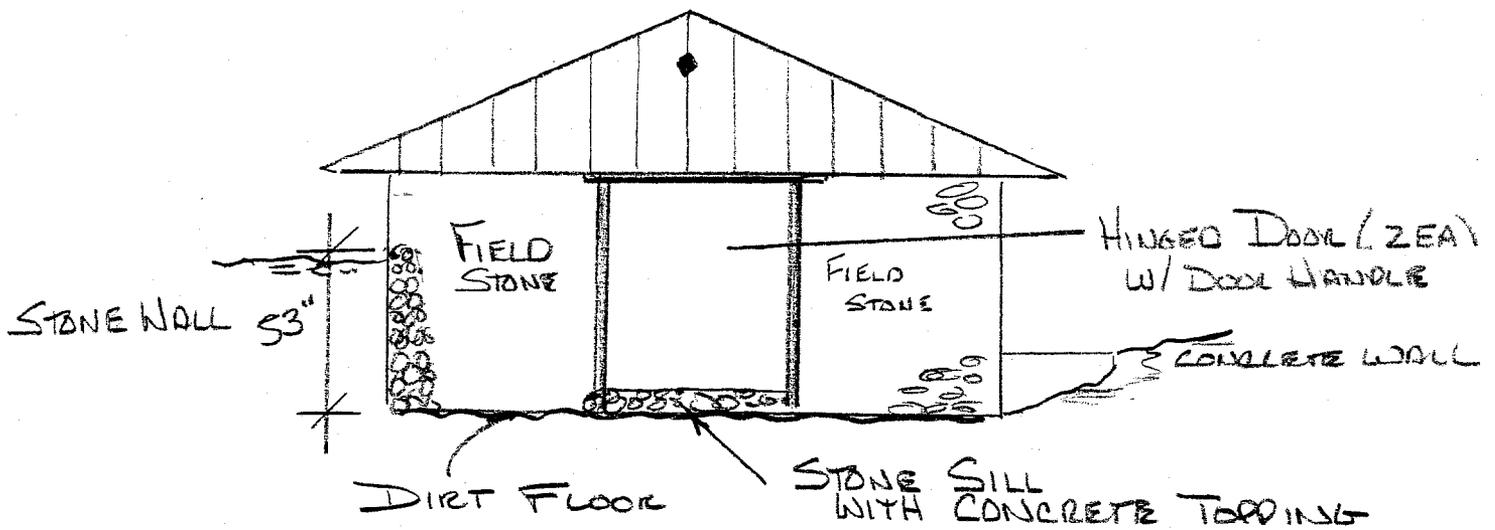

NORTH ELEVATION

McGlothlin Spring House
11/98'-20'
DETAIL C CONOWINGO, MD
Cecil Co.

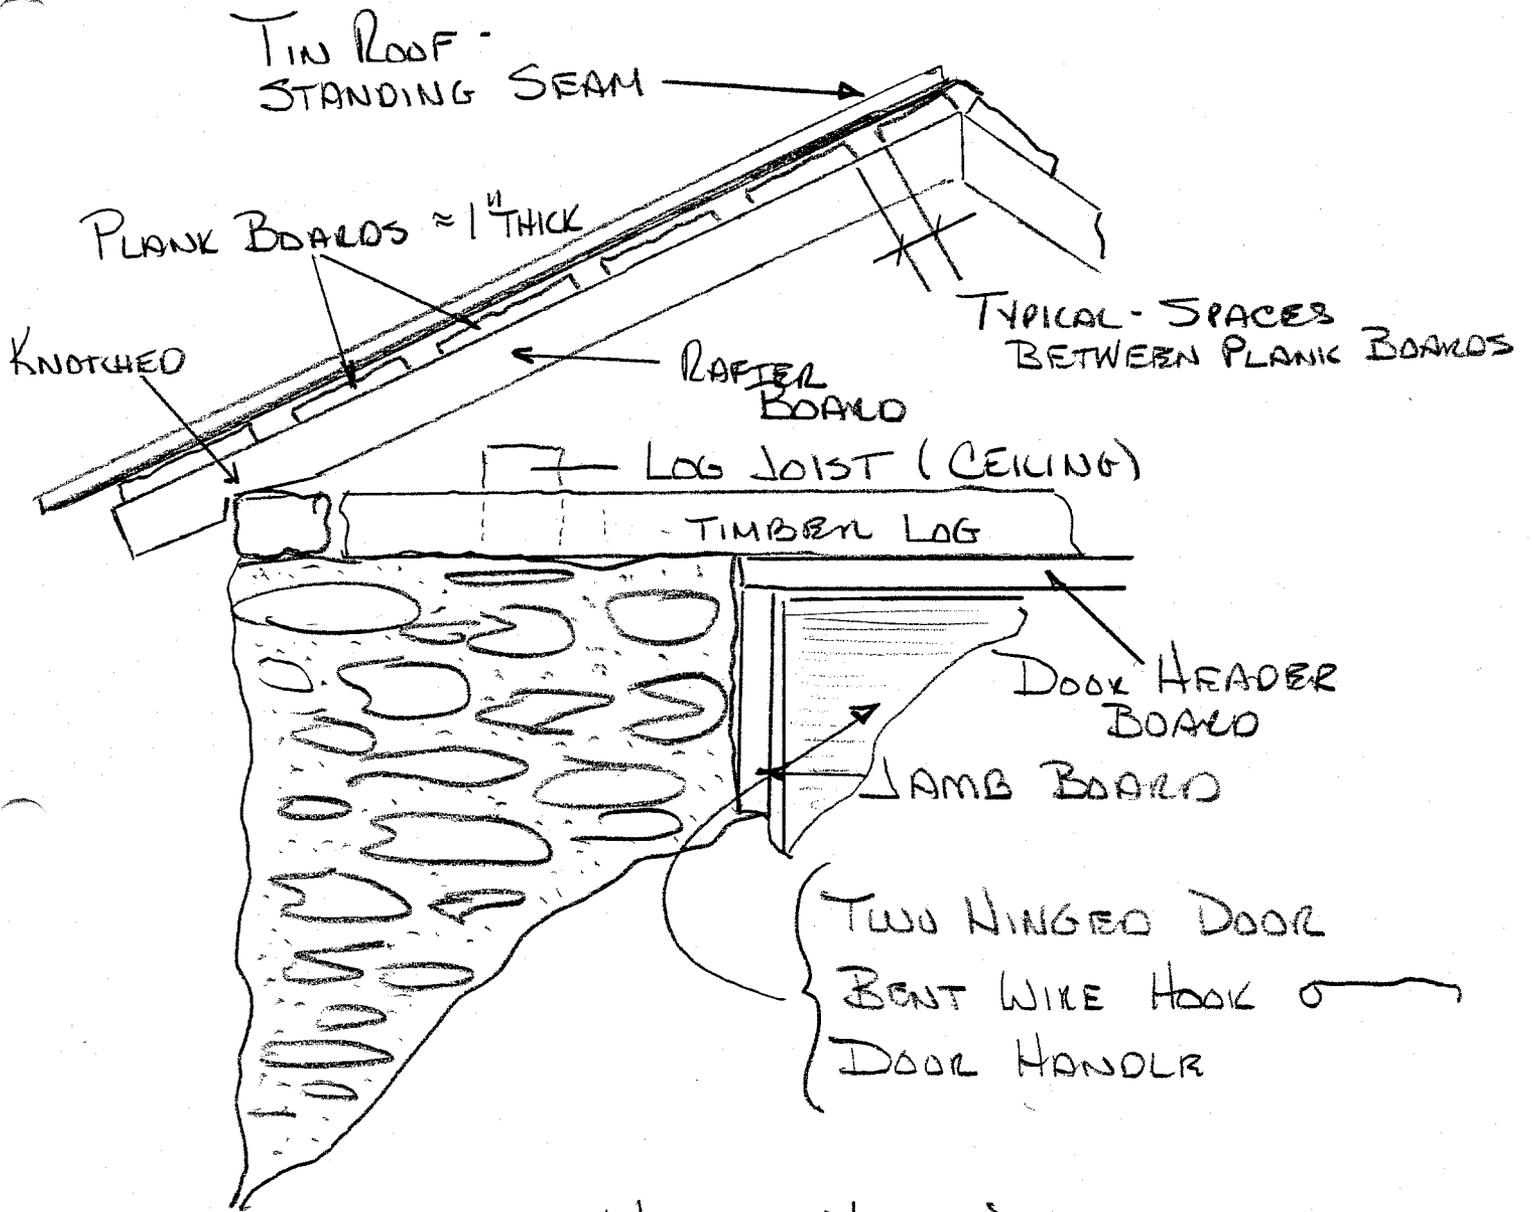

WROUGH NAIL THROUGHOUT
FRAMING -

McGlothlin Spring House
1198'

DETAIL D

CONOWINGO, MD
Cecil County - 10/1

SURVEY NO. CE-1430

GABLE
RAFTER

Gable Rafter
Studs
10 EA

RAFTER Knatched
Fitting

GIRTH

CEILING
BOARDS

Typical Full Length

PLANK
Ceiling
JOIST

PLATE

PLATE

FLATEK STONES
@ Top Stone wall
for leveling

STONE
Wall

GIRTH

DOOR HEADER

JAMB

Irregular Stones in Wall

Mortar Joint sizes Vary greatly

Polished Stone Threshold

EARTH FLOOR

Spring

WALL CIRCLES SPRING

McGlothlin Spring House

1198'

DETAIL E

CONOWINGO, MO
Cecil County - say


#171 MCGLOTHLIN ROAD
 CONOWINGO, MARYLAND
 21918

DEED REF: NDS 378/735


PLAT REF: REVISED MINOR
 SUBDIVISION PLAT OF THE LANDS
 OF H. BARRY MONTGOMERY DATED
 FEB. 1992

7TH ELECTION DISTRICT
 CECIL COUNTY, MARYLAND

SURVEY NO. CE-1430
 McGlathlin Spring House
 CONOWINGO MD
 Cecil County



DETAIL F-1

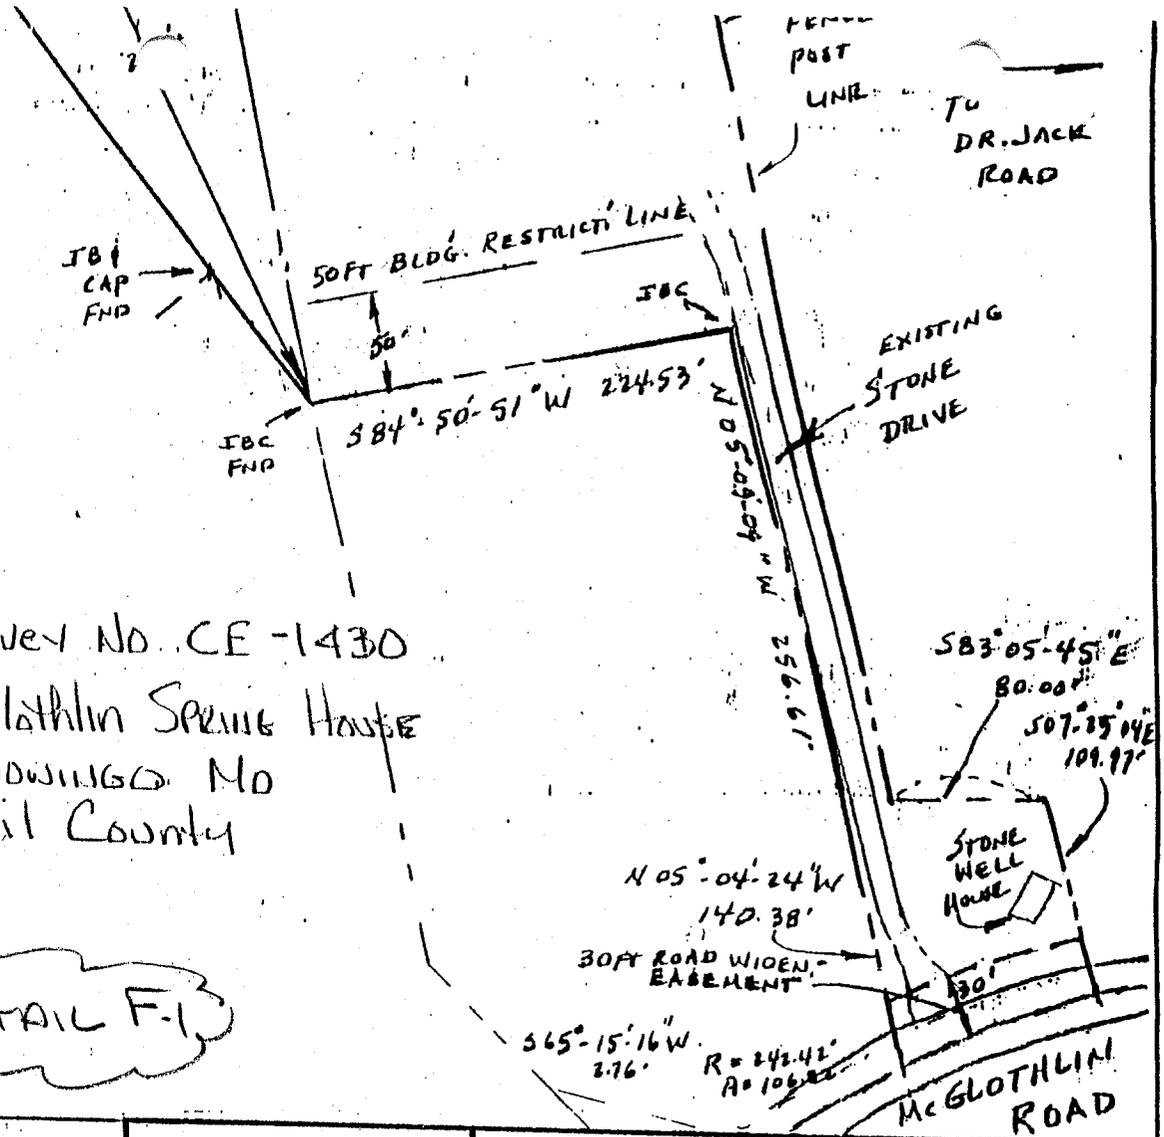

THE INFORMATION ON THIS LOCATION SURVEY SHOWS ONLY THAT THE IMPROVEMENTS INDICATED HEREON ARE LOCATED AS SHOWN WITHIN THE OUTLINES OF THE LOT UPON WHICH THEY ARE ERECTED, AND IS NOT TO BE CONSTRUED AS AN ESTABLISHMENT OF PROPERTY LINES. NO TITLE SEARCH PROVIDED FOR THIS CERTIFICATION.

I ALSO HEREBY CERTIFY THAT I HAVE EXAMINED THE FLOOD INSURANCE RATE MAP (FIRM MAP NO. 240019-0008A/0021A 4/4/83) FOR THE PROPERTY THAT IS THE SUBJECT OF THE SURVEY AND THAT THE PROPERTY DESCRIBED HEREON DOES NOT LIE IN AN AREA IDENTIFIED BY THE SECRETARY OF HOUSING AND URBAN DEVELOPMENT AS HAVING SPECIAL FLOOD OR MUDSLIDE HAZARDS.

Donald R. Hall
 Date: 4/10/94

SURVEYOR SEAL



WELSH ENGINEERING
 2 PARADISE DRIVE
 HAVRE DE GRACE, MARYLAND 21078
 (410) 939-1304


SCALE: 1" = 100' DATE: 4-9-94

DRAWN: JW CHECK: TW JOB: 421 c

CE-1430

N

1"=100'

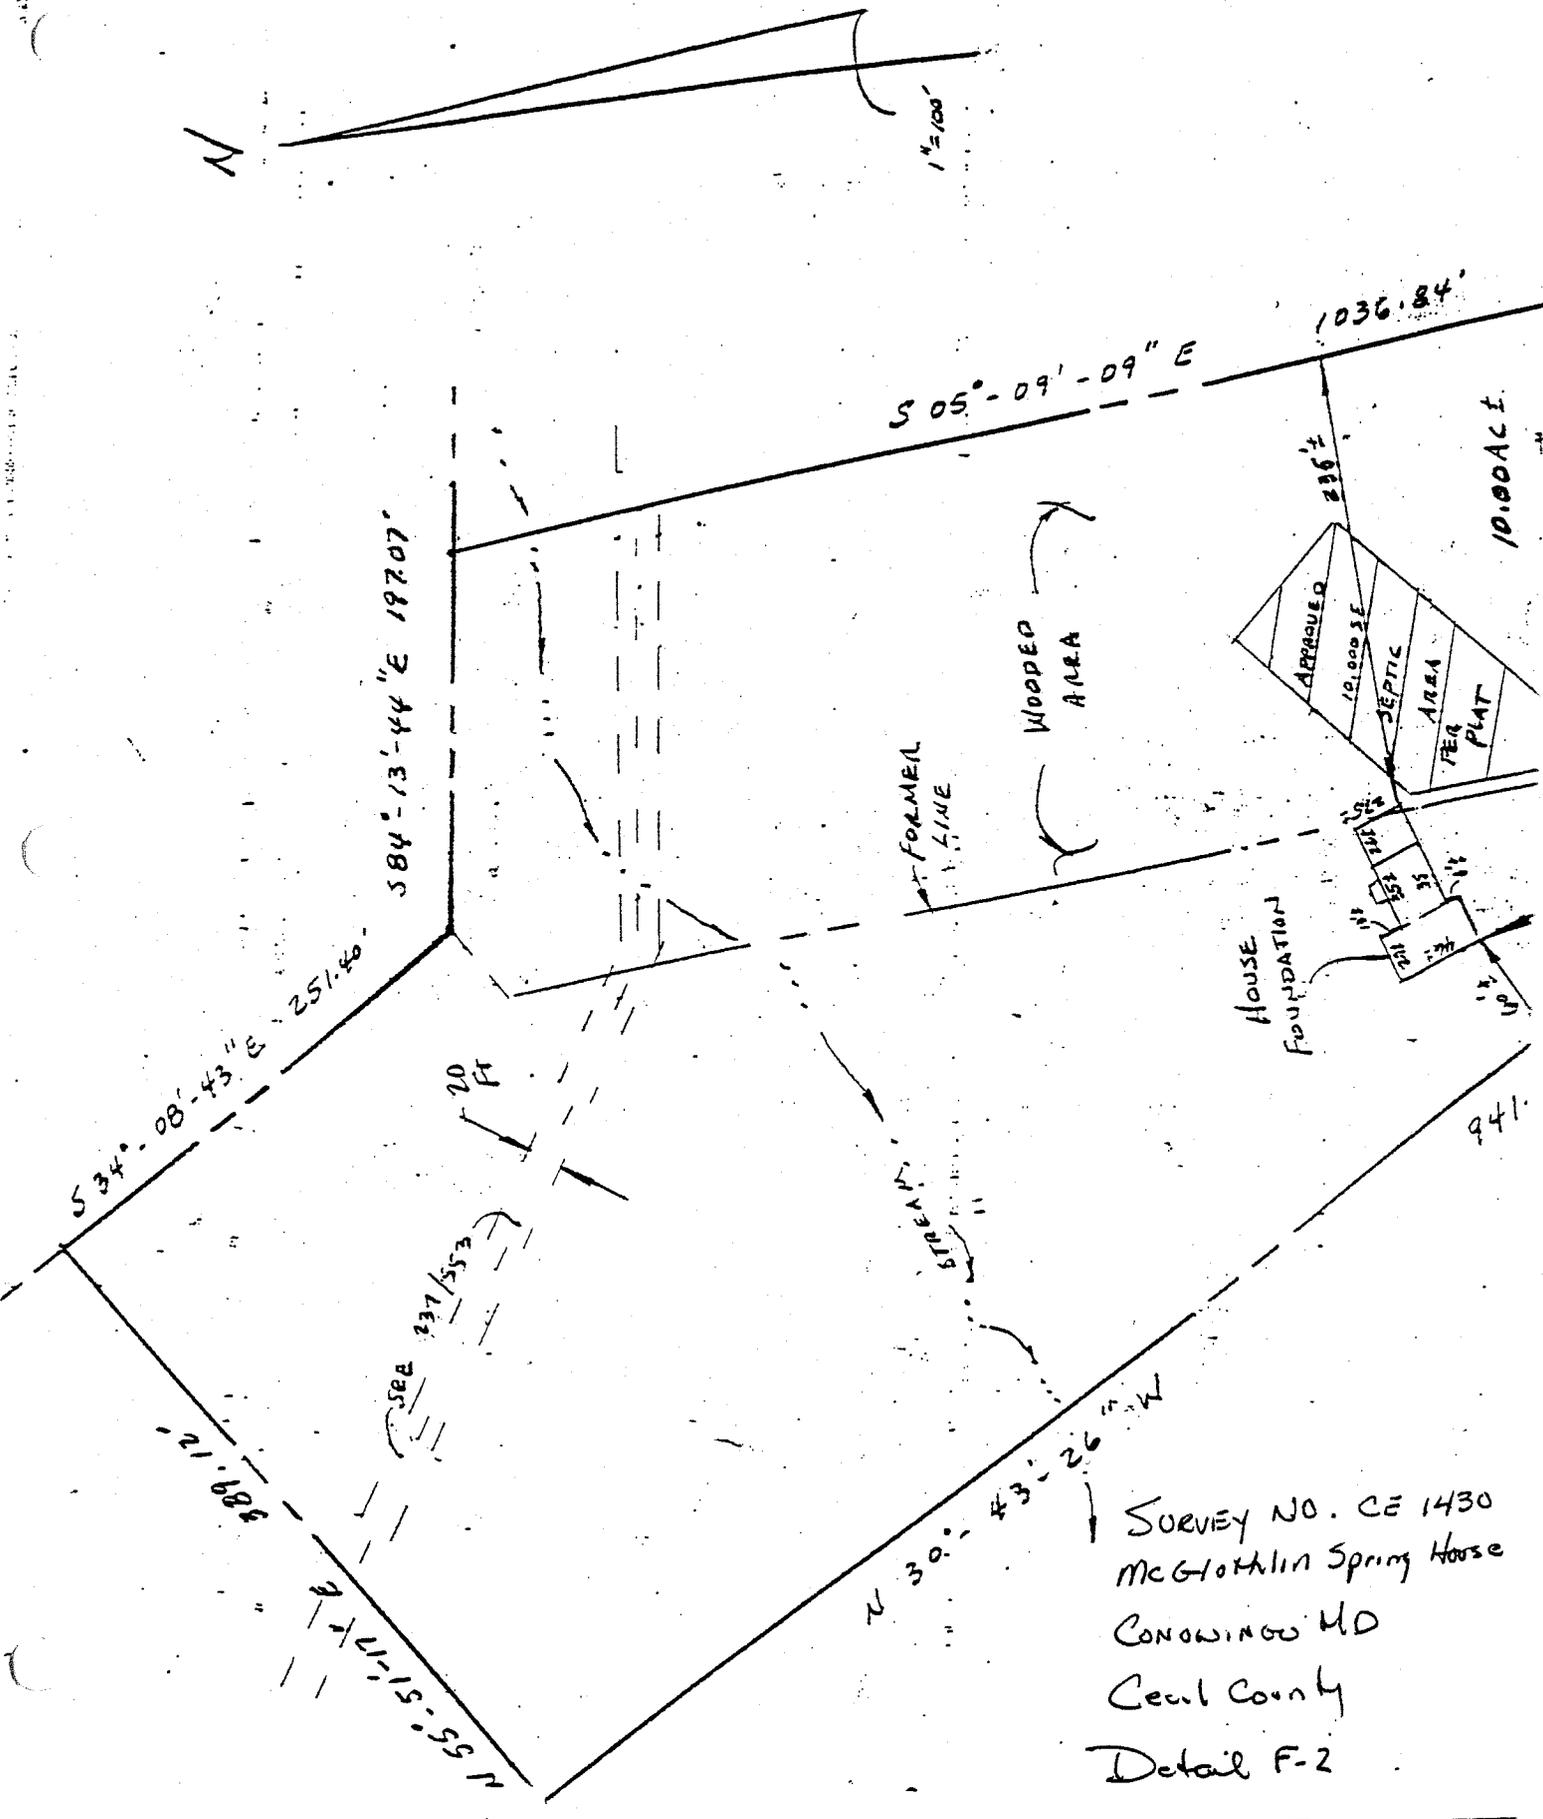

SURVEY NO. CE 1430
 MCGLOTHLIN Spring House
 CONOWINGO MD
 Cecil County
 Detail F-2

McGlothlin Spring House
Cecil County
Survey No CE-1430
Detail G-1

PATENT LIST

The 7th District of Cecil County, Maryland
or
North Susquehanna Hundred

This list is to accompany the Patent Map *in d*
of the map case.

By Nathan M. Ragan

Published 1988


By the

GENEALOGICAL SOCIETY of CECIL CO

929.375238 Ra-
a

McGlothlin Springs House
Conamuso, MD
Seal County

JAMES NO. CE-14308
DETAIL E-2

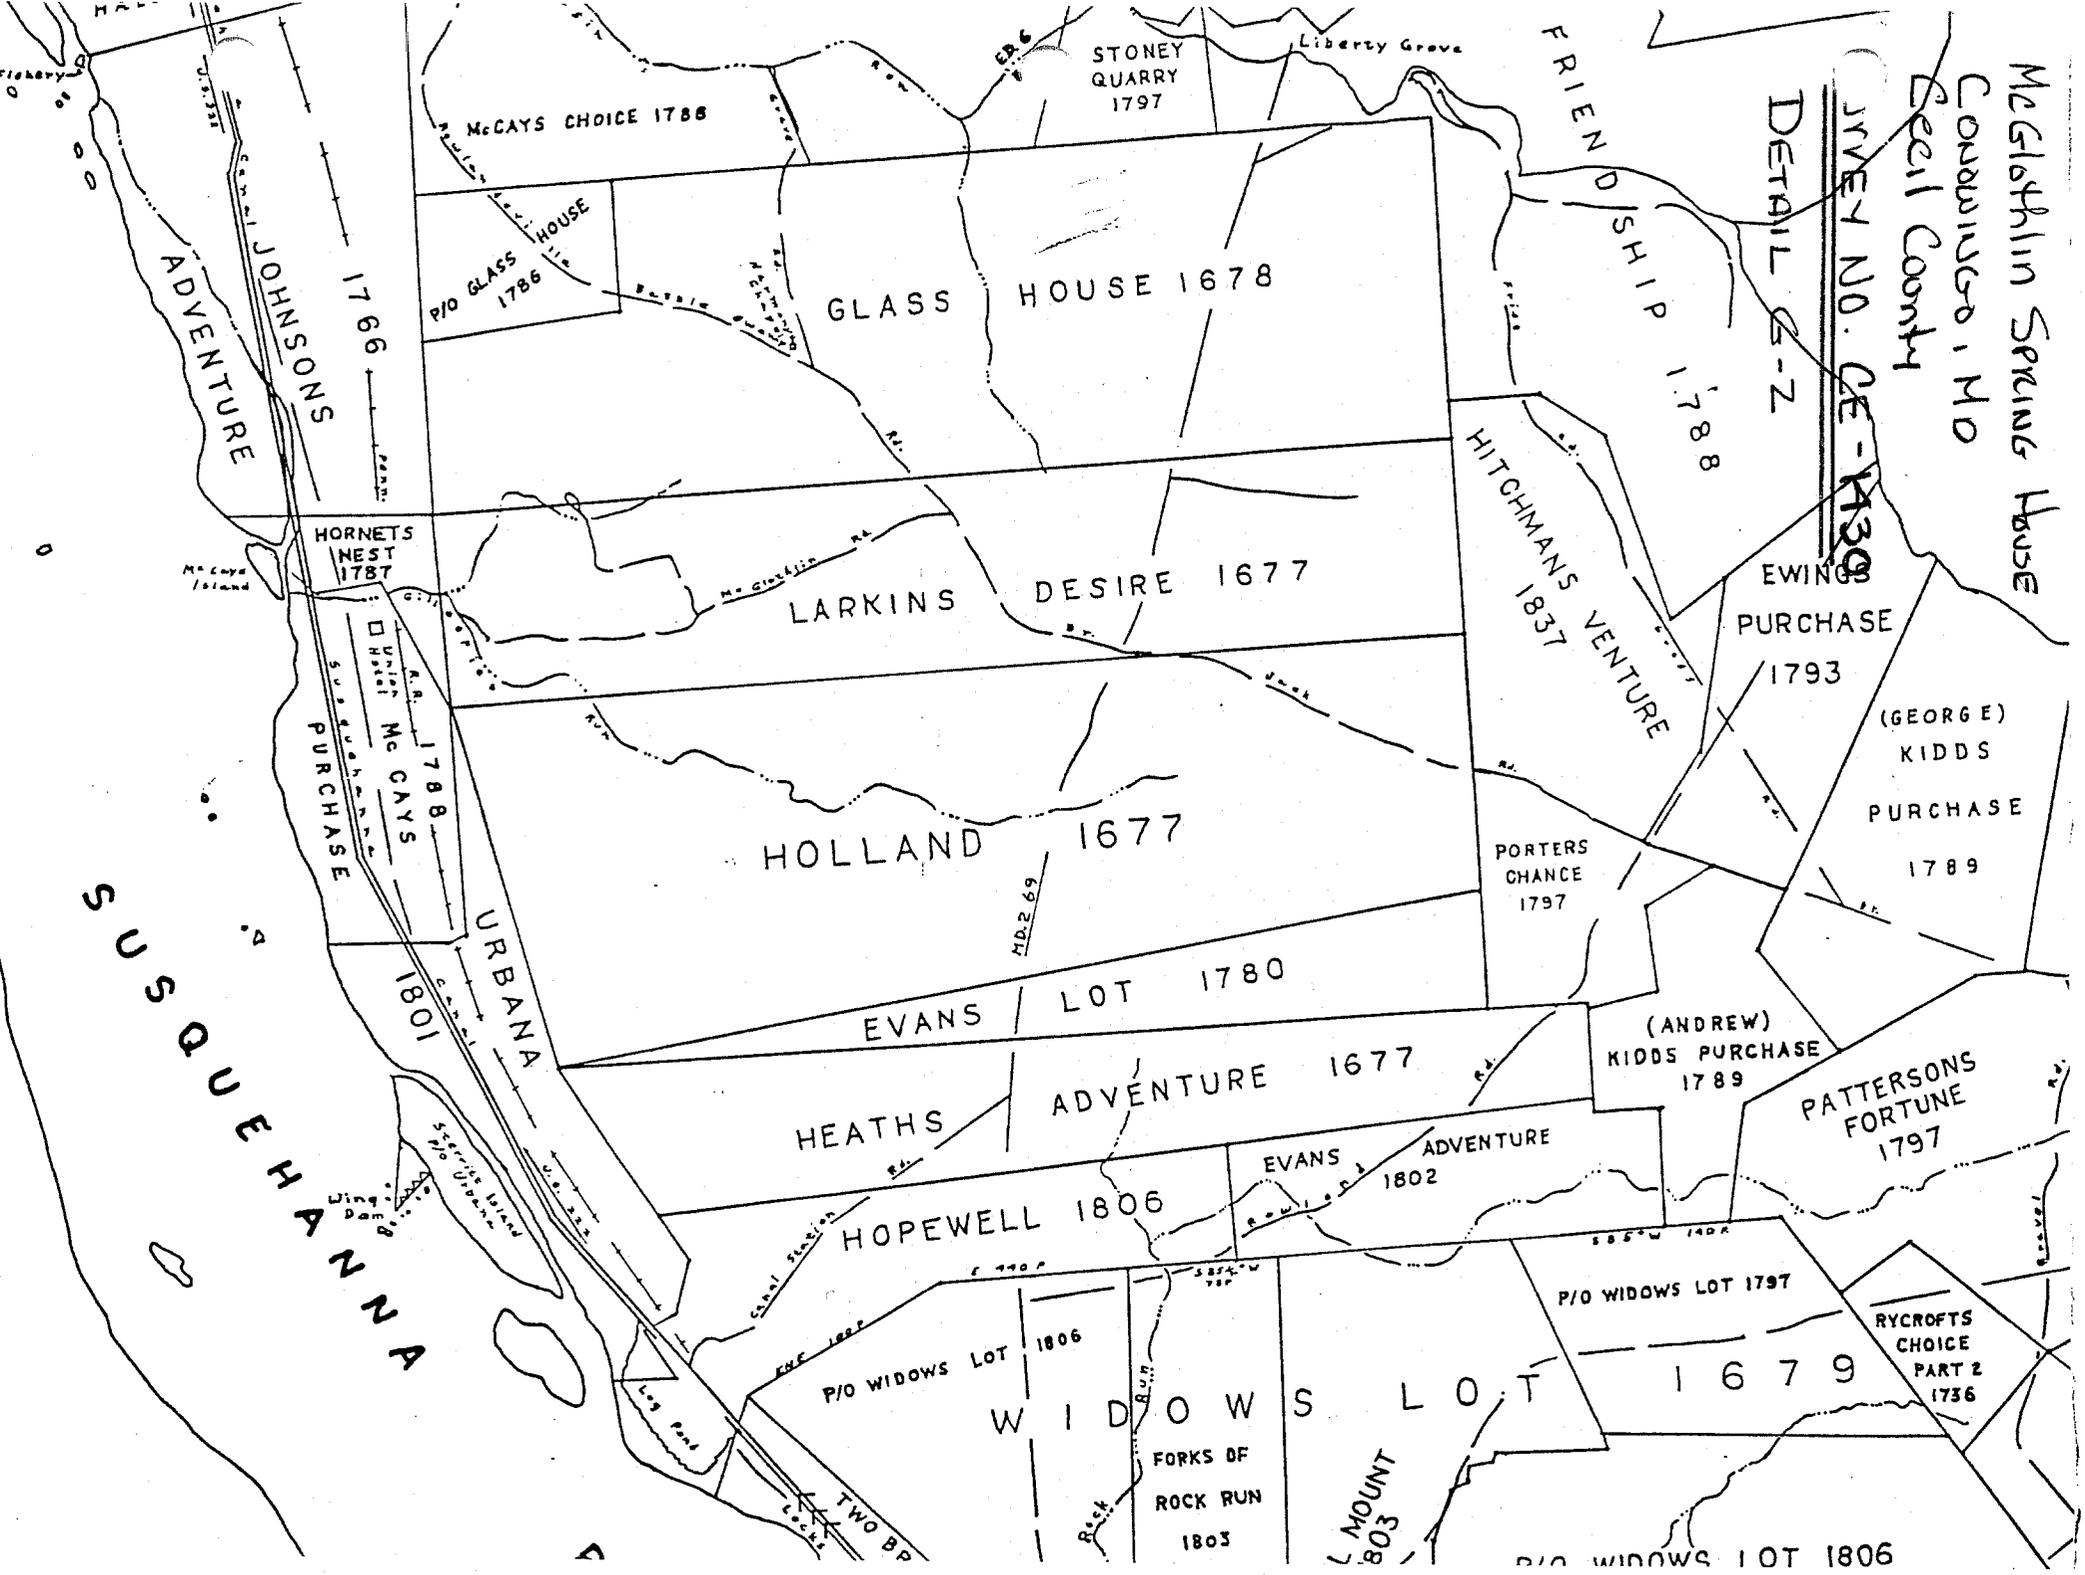

McCAYS CHOICE 1788

STONEY QUARRY 1797

Liberty Grove

FRIENDSHIP 1788

P/O GLASS HOUSE 1786

GLASS HOUSE 1678

ADVENTURE 1766

JOHNSONS 1766

HORNETS NEST 1787

LARKINS DESIRE 1677

HITCHMANS VENTURE 1837

EWING PURCHASE 1793

(GEORGE) KIDDS PURCHASE 1789

HOLLAND 1677

PORTERS CHANCE 1797

EVANS LOT 1780

(ANDREW) KIDDS PURCHASE 1789

PATTERSONS FORTUNE 1797

HEATHS ADVENTURE 1677

EVANS ADVENTURE 1802

HOPEWELL 1806

P/O WIDOWS LOT 1797

RYCROFTS CHOICE PART 2 1736

P/O WIDOWS LOT 1806

WIDOWS LOT

FORKS OF ROCK RUN 1803

L MOUNT 803

1679

P/O WIDOWS LOT 1806

SUSQUEHANNA

URBANA

McCays Purchase
A.R. 1788
McCays

CANAL 1802

TWO BR

Rock Run

McGlothlin SPRING HOUSE
 Cecil County
 Detail G-3

SURVEY NO. CE-1430

#	Tract name	Acreage	Loc	Patentee	Year Lib. & Fol.	Cert. #
53	Hopewell	124 A	B2	Geo. Kidd & John Sterrett	1801 Lib IC#L/F 646	Pat. cert. #
54	Hornets Nest	25 3/4 A	A1	Samuel Patterson Wallace	1787 Lib IC#C/F 161	Pat. cert. #
55	Hughes Choice # 1	127 1/2 A	D6	Sam'l Hughes & Ed Coles	1801 Lib IC#P/F 229	
56	Hughes Choice # 2	431 1/2 A	D6	Sam'l Hughes-Edwin Cole	1801 Lib IC#Q/F 31	Pat. cert. #
57	Hughs & Company		D8			
58	Husbands Rest	123A.2R.24P	C8	John (James?) McHarak	1792 Lib IC#H/F 42	Pat. cert. #
59	Indian Queen	81A.1R.29p.	B5	George Kidd	1797 Lib IC#L/F 357	Pat. cert. #
60	John Stump Island	3 Rood 13P.	G8	John Stump et al	1905 Lib WDM#1/F 560	
61	Johns Beginning	376 1/2 A	B6	Hugh Boyd & Hugh Steel	1799 Lib IC#M/F 564	Pat. cert. #
62	Johnsons Adventure	222 A	A1	Nicholas Hyland	1766 Lib BC&BS#34/F89	Pat. cert. #
63	Johnsons Island Resurv	28 3/4 A	D2	John & Nathaniel Kerr	1795 Lib IC#H/F 738	
64	Johnstons Island	28 3/4 A	D2	Nathaniel & John Kerr	1795	Pat. cert. #
65	Kerrs Island	5 1/4 A	C2	Nath'l & John Kerr	1787	Unpat. Cert.
66	Kerrs Landing	1A.2R.19P.	*	Samuel Kerr	1815	Unpat. cert
67	Kerrs Landing Proc. *	1A.2R.19P.	*	John Steel	1820	Unpat. cert
68	Kidd's Purchase	155 A	B4	George Kidd	1789 Lib IC#E/F 200	Pat. cert.
69	Kidds Purchase	86 1/4 A	B4	Andrew Kidd	1789 Lib IC#E/F 199	Pat. cert.
70	Larkins Desire	300 A	A2	John Larkin	1677 Lib 20/F 64	
71	Locust Hill	103 1/2 A	D7	William Currier	1786	Unpat. cert
72	Long Island	10A. 28P.	*	Jos. Miles & Nath'l Ewing	1820 Lib CG#C/F 332	Pat. cert.
73	Lucky Mistake	271 A	D4	Elizabeth Cazier	1790 Lib IC#E/F 492	Pat. cert.
74	Maidenhead	156 A	E8	Richard Snowden Thomas	1797 Lib IC#L/F 272	Pat. cert.
75	McCays Choice	113 3/4 A	A2	John Maccay	1788 Lib IC#C/F 337	Pat. cert.
76	McCays Purchase	84 A	B1	John McCay	1788 Lib IC#C/F 338	Pat. cert.
77	McMasters Delight	210A.3R.29P	B5	Robert McMaster	1790 Lib IC#C/F 727	Pat. cert.
78	Mount Ararat	378 1/2 A	D5	Philip Thomas	1789 Lib IC#E/F 185	Pat. cert.



CECIL COUNTY, MARYLAND.

Compiled, Drawn and Published from Actual Surveys

BY

LAKE, GRIFFING & STEVENSON.

General Office: 27 SOUTH SIXTH STREET, PHILADELPHIA, PA.

1877.

McGlothlin Spring House
Cecil County
Survey MD
Detail H-1
CE-1430


CECIL COUNTY

SHOWING TOPOGRAPHY AND THE ELECTION DISTRICTS

STATE OF MARYLAND
DEPARTMENT OF GEOLOGY, MINES AND
WATER RESOURCES
JOSEPH T. SINGEWALD JR., DIRECTOR

COMPILED FROM TOPOGRAPHIC SHEETS OF THE
CORPS OF ENGINEERS, U.S. ARMY
AND THE
U.S. GEOLOGICAL SURVEY
1950

Scale 1:62500



Contour interval 20 feet

Numbered ticks indicate the 10,000 foot Maryland State Grid


The last three digits of the grid numbers are omitted

Datum is mean sea level

P.O. Box 11
C... ..


CONVENTIONAL SIGNS

CULTURE
(printed in black)

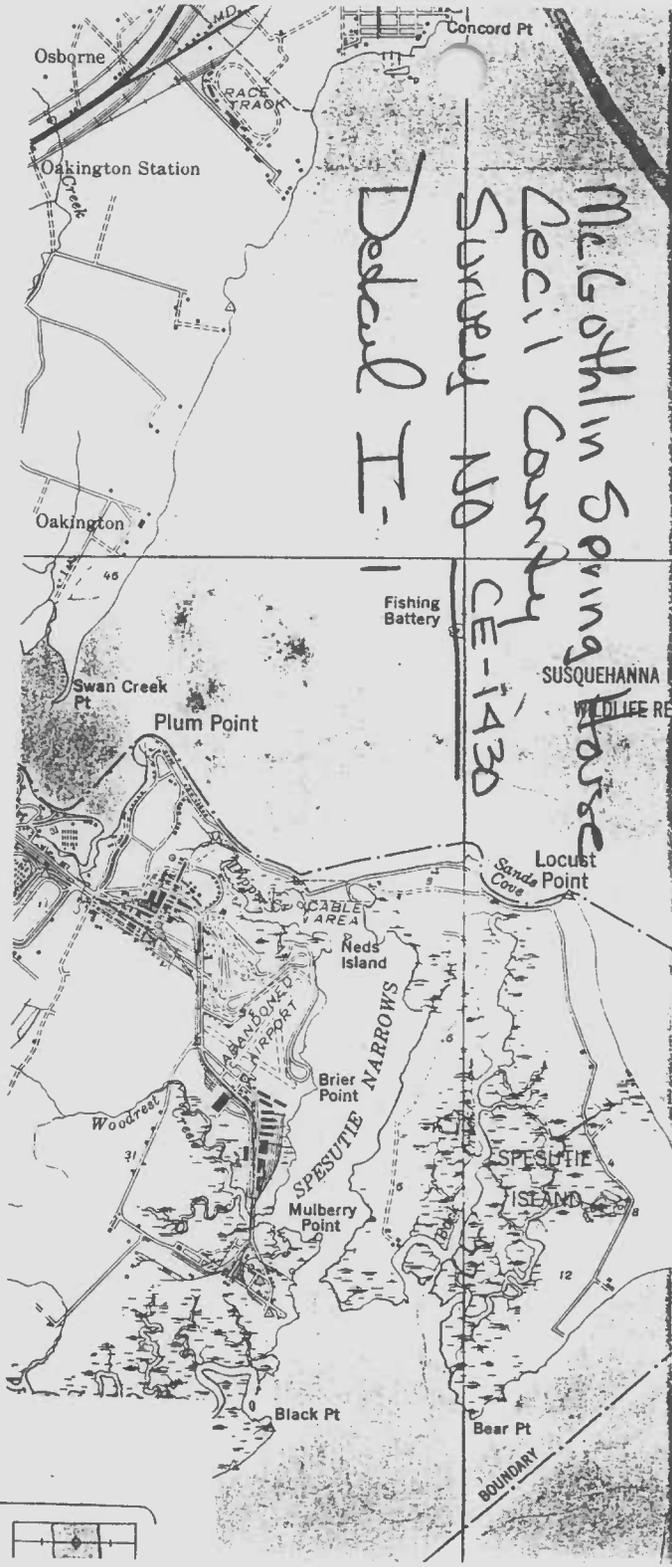

620
610
30'
500
590



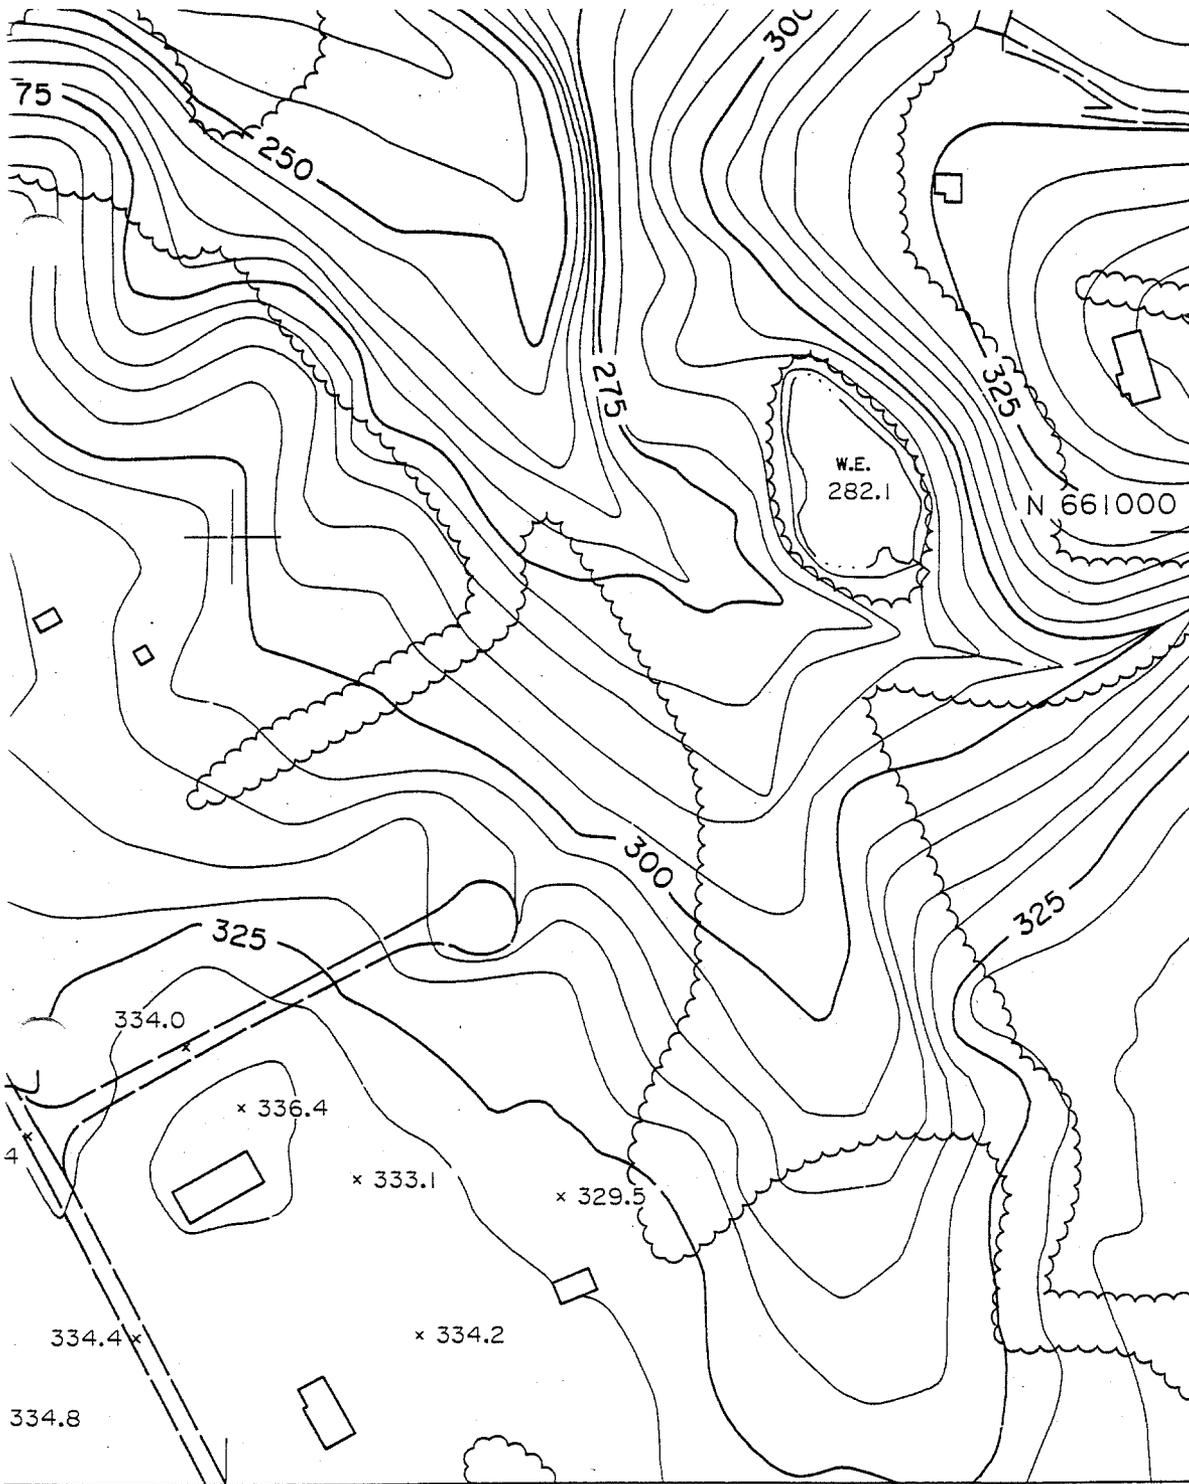

McGothlin Sand
 House -
 Cecil County
 Survey NO CE 1430
 Detail I-1


COMPREHENSIVE MAPPING PROGRAM

**CECIL COUNTY
 MARYLAND**


**Office of Planning and
 Economic Development**

**Department of
 Public Works**

SHEET 16-8

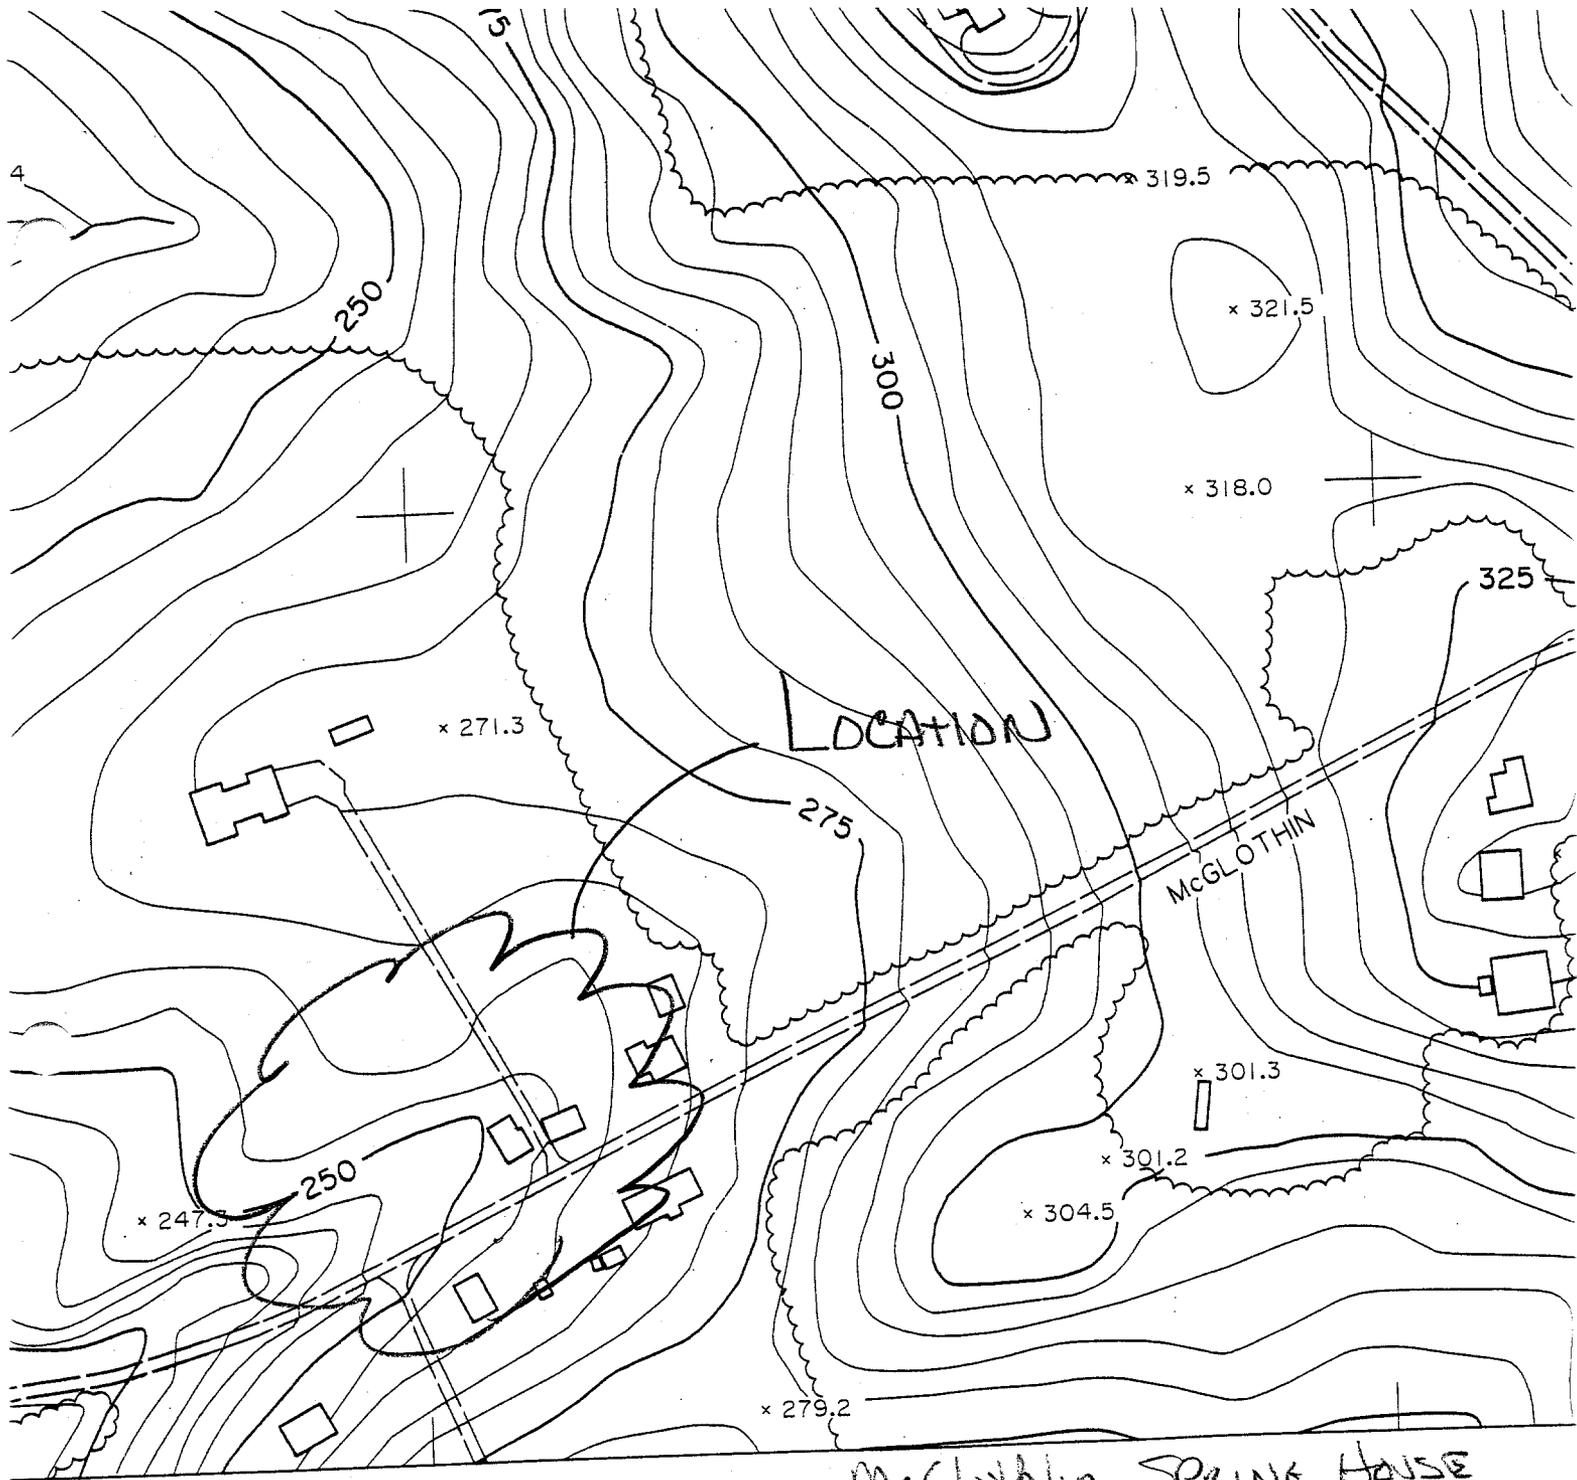

McGlothlin Spring House
 Cecil County
 Survey No. CE-1430
 Detail I-2



SCALE 1"=200'

Compiled —
 Aerial Photogr
 Date of Photogr
 Map Scale —
 Contour Interva



39°37'30"


ADC's "HARFORD COUNTY, MD STREET MAP" for Continuation 650,000 FT

76°10'00"

Joins Map 2

1,040,000 FT

76°07'30"

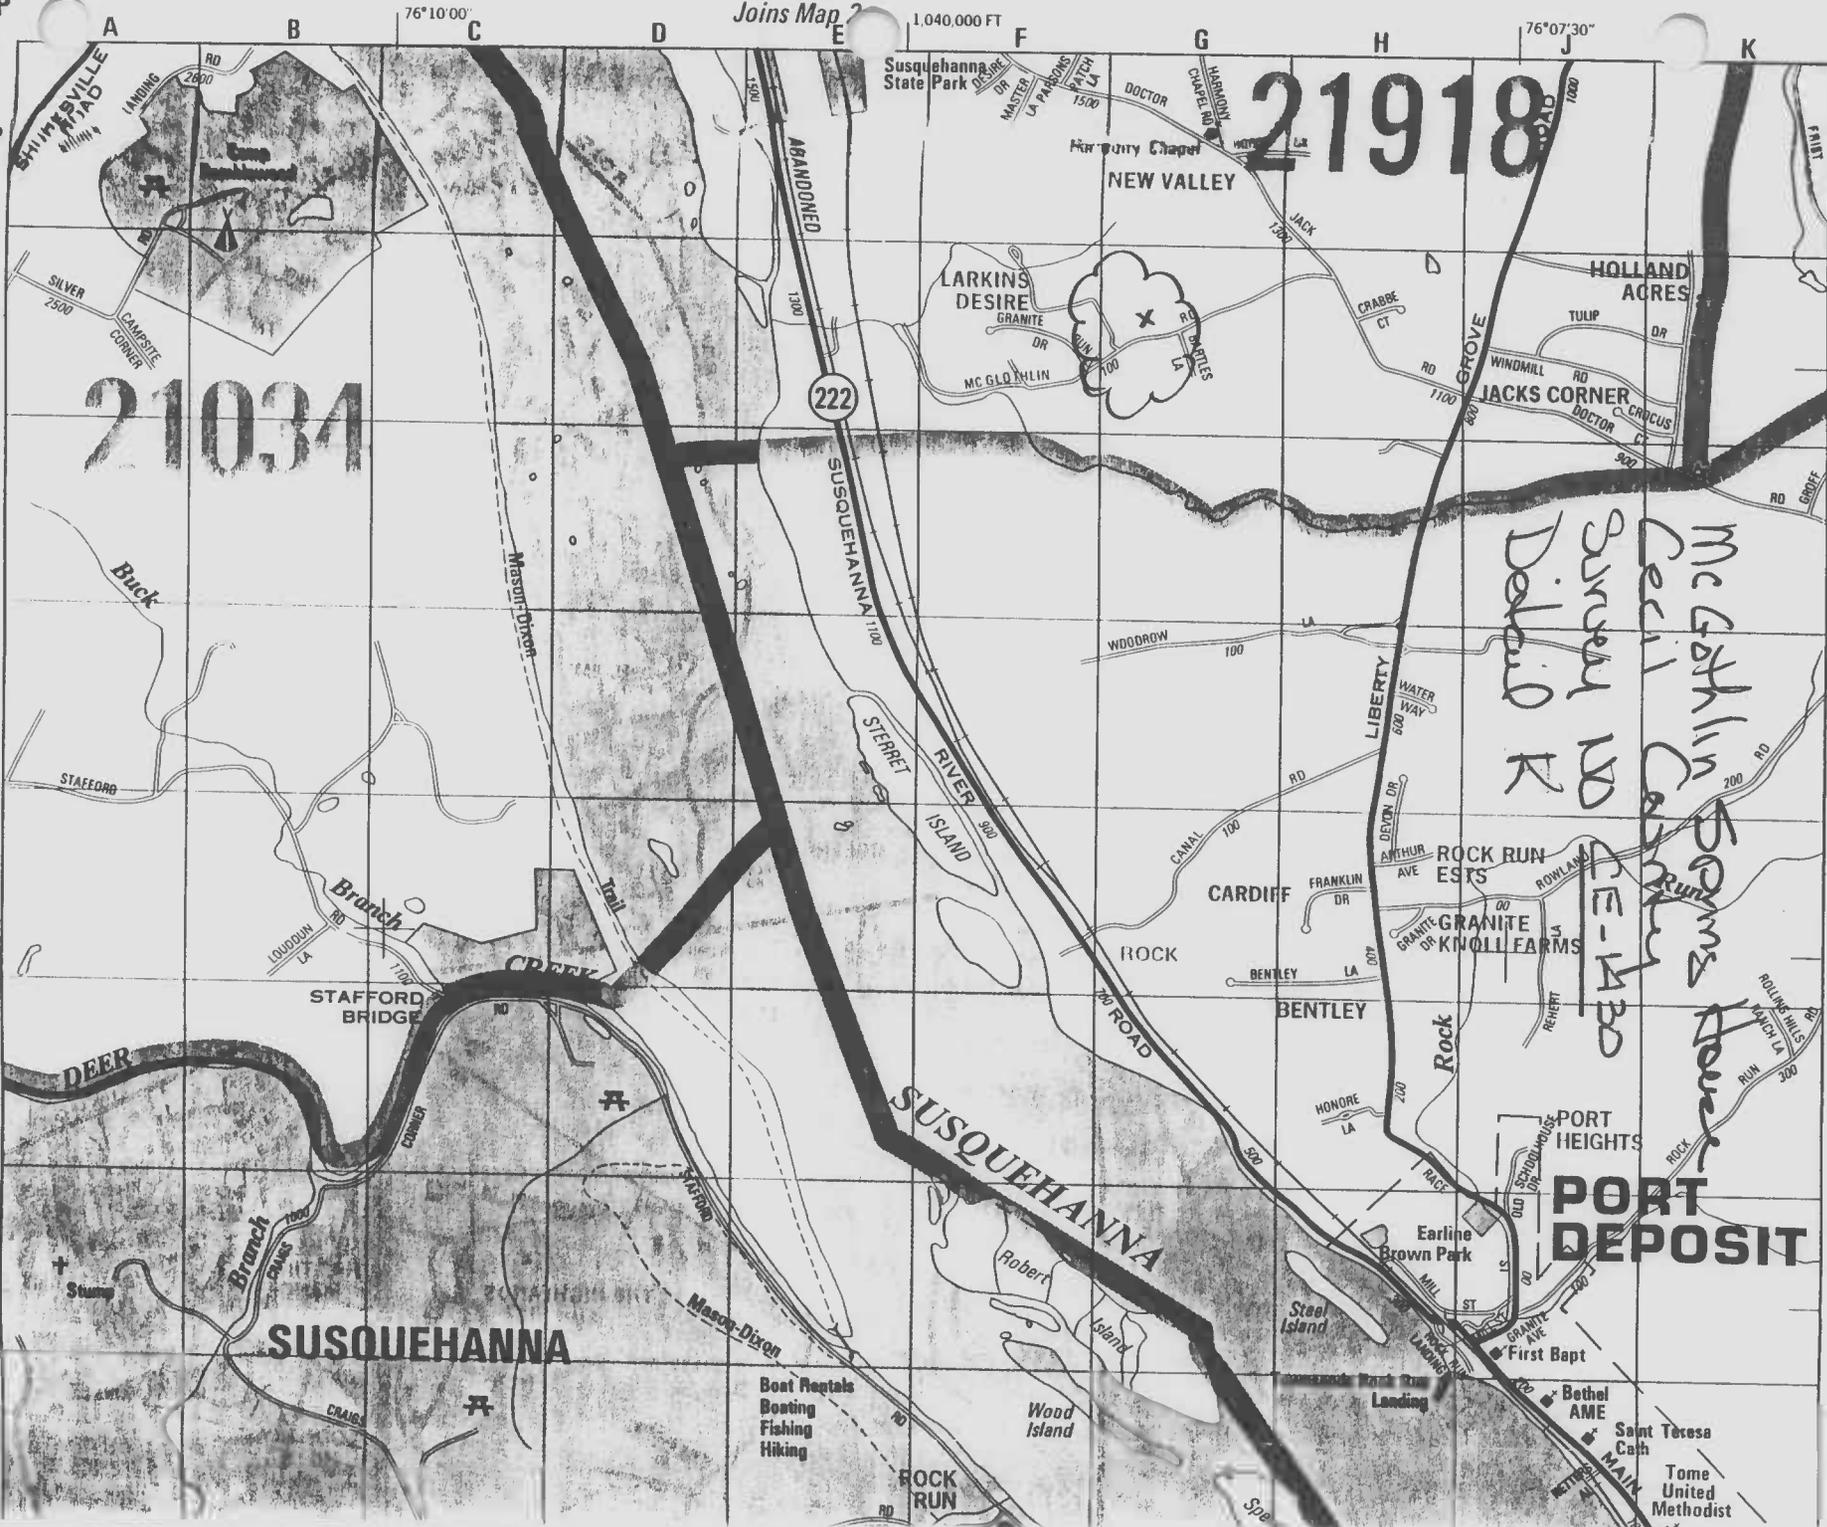

21034


21918

McGoffin's
Downs House
Surrey RD
Deland R
CE-430

PORT DEPOSIT

Boat Rentals
Boating
Fishing
Hiking

Saint Teresa
Cath
Tome
United
Methodist

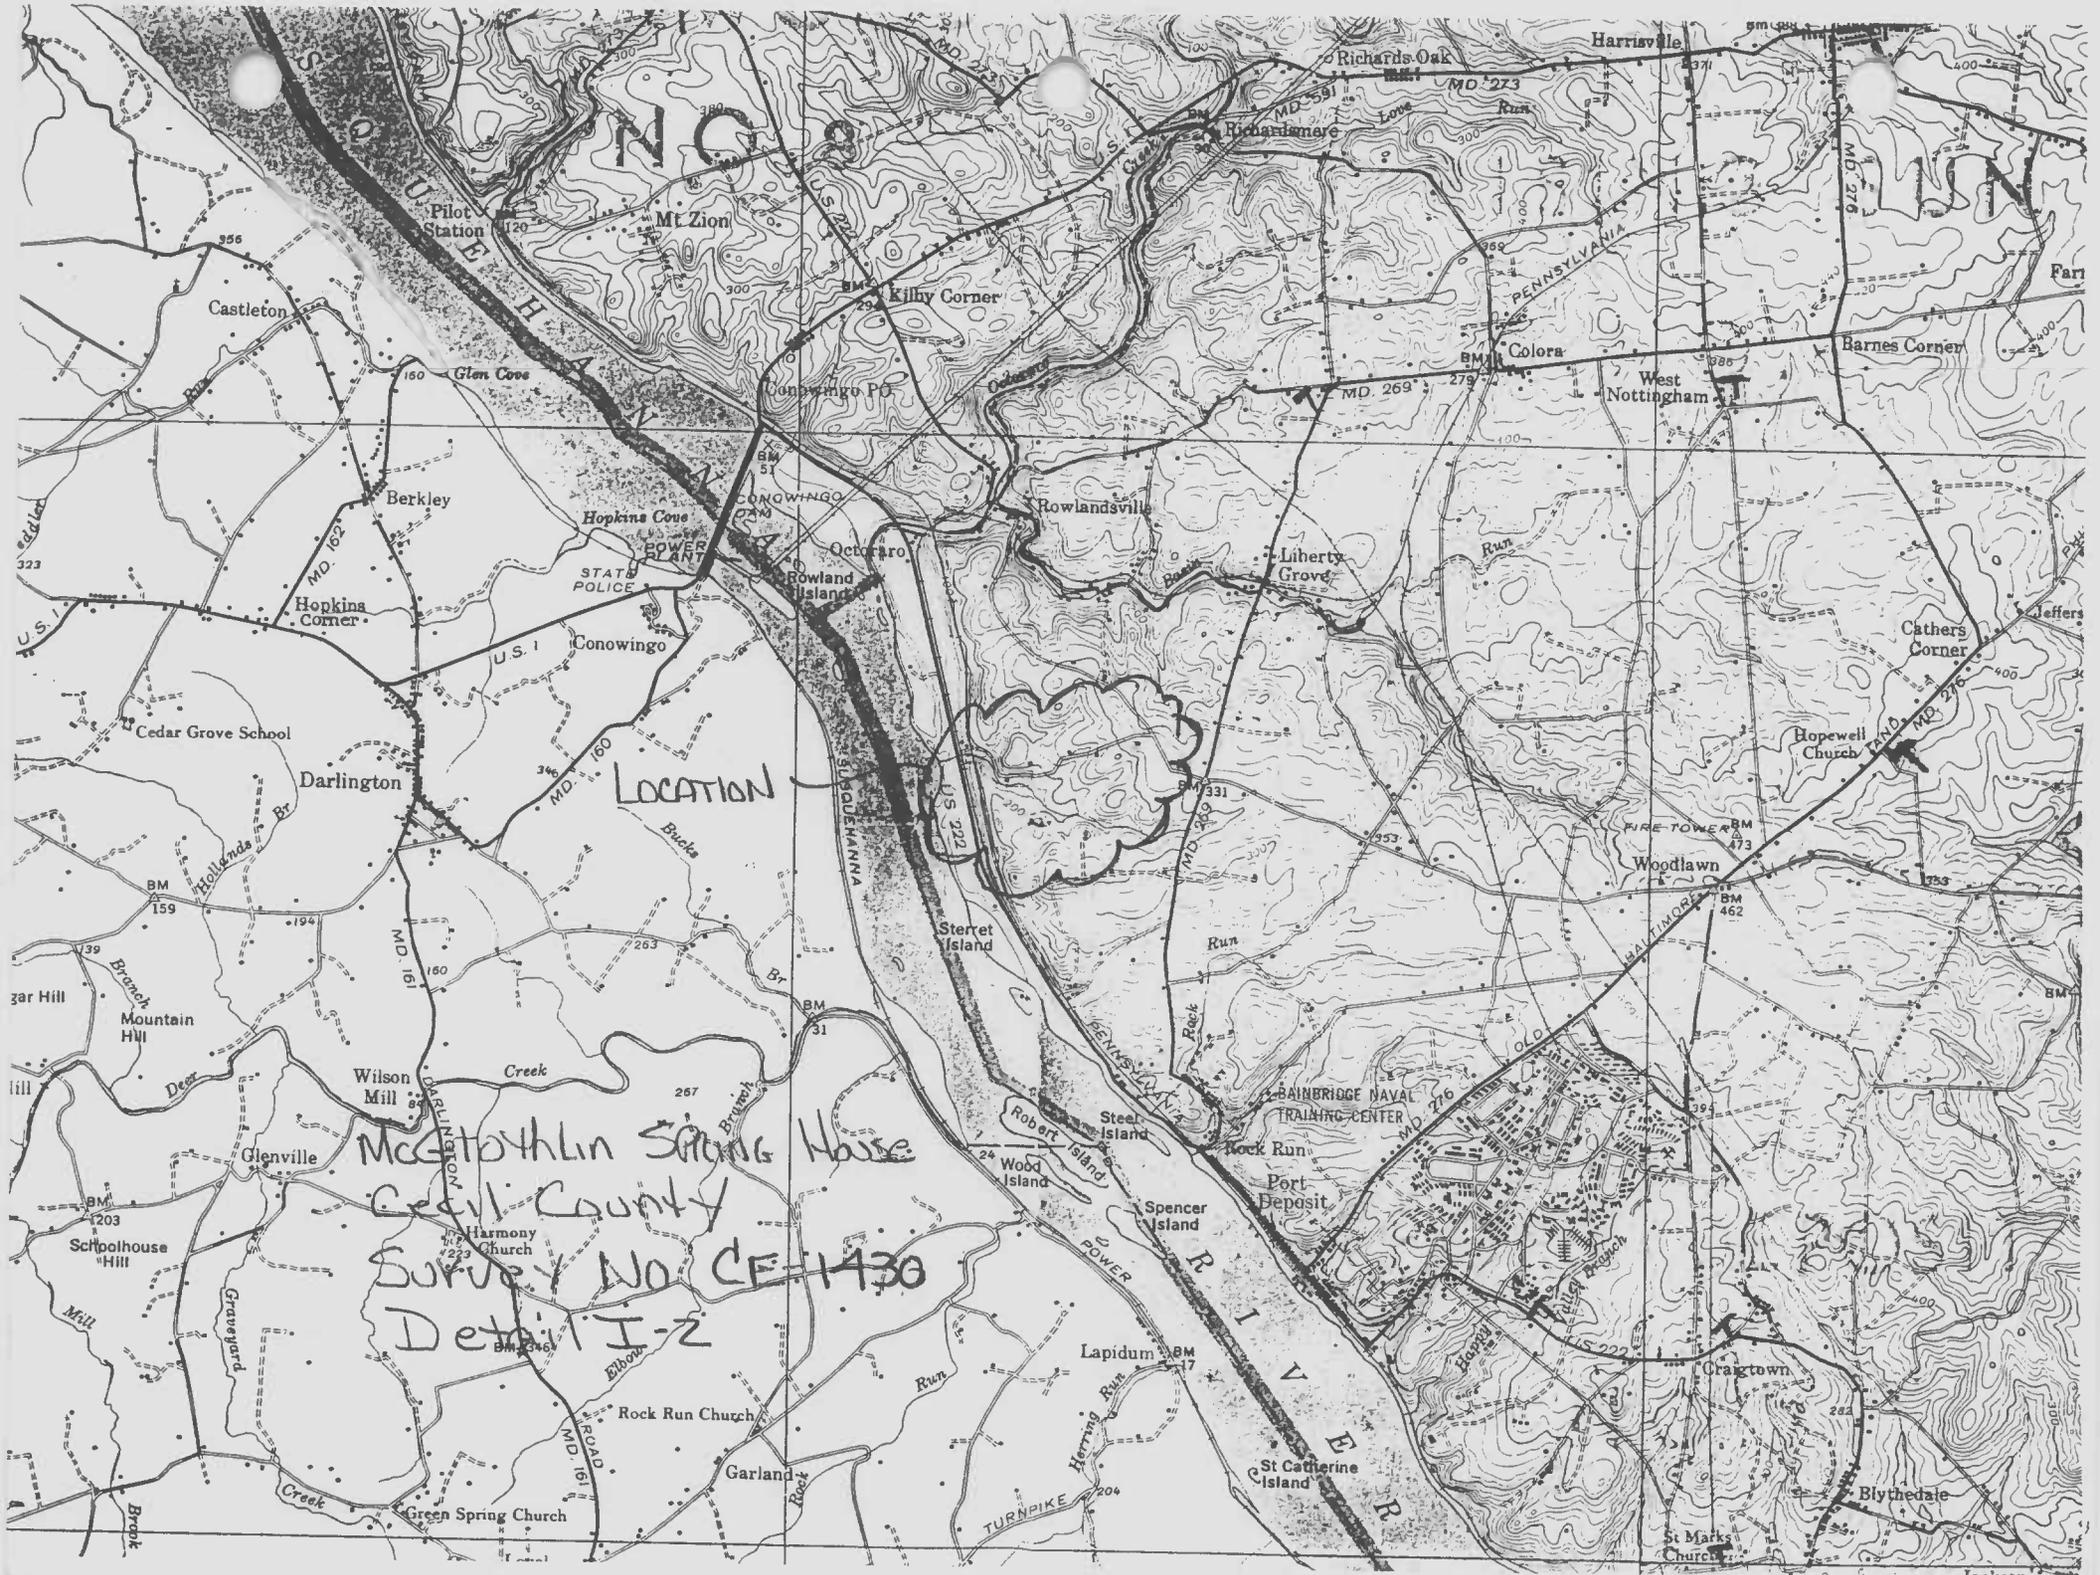

LOCATION

McCarthylin Springs Horse
Cecil County
Survey No. CE-1430
Detail I-2





Mc Koylin Spring House CE 1430

Conowingo, Md

Cecil County

S. Johnson 12198

5/20

WEST / SOUTH WALLS VIEWING EAST

NO SHPO



McJothlin Spring House
Conowingo, Md
Ceel County

CE-1430

≤ Johnson 12/99
6/20

West Wall - WORK Platform
Wall Crack

MD SHPO



McGlothlin Spring House CE-1430

Conowingo Md

Cecil County

S. Johanson 12/98

7/20

Window Latch in South Wall. View N

MO SHPO



McGlothlin Spring House

CE-430

Conowingo, MO

Cecil County

S. Johnson

12/98

8/20

SE Corner (Viewing West)

MO SHPO



Mc Glothlin Spring House

CE 1430

Conowingo Md.

Cecil County

S. Johanson

12/98

9/20

NE Corner - Viewing West

MD SHPO



CE 1430

McClothlin Spring House

Conowingo, Md.

Cecil County

S. Johanson 12/98

10/20

South Wall Gable Roof Overhang Viewing W

NO SHPO



CE-1430

McGuthlin Spring House

Conowingo, Md

Cecil County

S. Johanson 12198

11/20

Top of Gable Roof, south wall. Viewing N

MD SHPD



CE-1430

McGlothlin Spring House

Zenonwango, Maryland

Cecil County

S. Johnson 12/98

12/20

Sp - beam in Roof

MD SHPO



CE 1430

McGlothlin Spring House

Conowingo, Md

Cecil Md.

S. Johnson 12/98

15/20

Knotted Patter, Viewing East

N/D SHAD



CE-1430

McGlothlin Spring House

Conowingo Md

Cecil County

S. Johanson 12/98

16/20

Interior Ceiling, Viewing SE

M.D. SHPo



CE 1430

McGlothlin Spring House

Conowingo, Md

Cecil County

S. Johnson

12/98

17:20

Concrete Lined Pit, $d = 24''$, Viewing SE

MD SHPO



CE 1430

McGlothlin Spring House

Conowingo MD

Cecil County

S. Johanson 12198

18/70

Spring Retaining Wall, at North wall
Viewing East

MO SHPO



McGlothlin Spring House

CE 1430

Conowingo, Md

Cecil County

S. Johnson

12/98

19/20

Roof Overhang, beyond North Wall
Viewing East

Md SHPO



CE 1430

McGlothlin Spring House

Conowingo, Md

Cecil County

S. Johnson 12/98

20/20

North Wall Door header & Lumb,
forming South.

Mr. SHPO



CE H30

McGlothlin Spring House

Conowingo Md.

Cecil County

S. Johanson '2198

'3/20

Rafter Overhang on 'west wall

Viewing North

1/2 step



EE - 1430

W. G. G. Spring Ho. 50

Corwings, Mo

Seal County

S. Johanson

12/98

A/20

Split Seam on Tin Roof, Viewing E.

100 5000



CE 1430

McGlothlin Spring House
Conowingo, Maryland
Cecil County

S. Johanson 12/98

1 of 20

EAST WALL - Viewing NW

MO SHPO



CE 1430

McGlothlin Spring House

Conowingo, Mo

Cecil County

S Johanson 12 198

2 of 20

South Wall - Viewing North

NO SHPO



McGlothlin Spring House

CE-1430

CONOWINGO, M.D.

PRINCE GEORGE COUNTY

S. JOHANSON 12198

30720

SOUTH WEST CORNER, VIEWING N.E.

NO SHPO



McGlothlin Spring House

CE-1430

Rowwinds, Mo

Cecil County

S Johnson 12/98

4/20

West Wall and Entrance, viewing NE

MO SHPO