


* SPEED (MPH)	MINIMUM DISTANCE FROM TAPER TO FIRST SIGN & FOR SIDE STREET SIGN DISTANCE	A	B	C	D	ADDITIONAL SIGNS IN SERIES TO BE SPACED AT A MINIMUM	MINIMUM COMBINED ADVANCED WARNING
≤ 25	200'	200'	200'	200'	-		600'
26 - 35	300'	300'	300'	300'	-		900'
36 - 40	500'	500'	500'	500'	-		1500'
41 - 65	800'	800'	700'	1100'	2600'	(1/2 MILE)	5200' (1 MILE)

****SPEED LIMIT OR PREVAILING TRAVEL SPEED, WHICHEVER IS HIGHER.**

BELOW EXAMPLE TWO LANES, ONE-WAY ROADWAY /SPEED LIMIT IS 35 MPH /PREVAILING SPEED IS 38 MPH (USE 40 MPH)

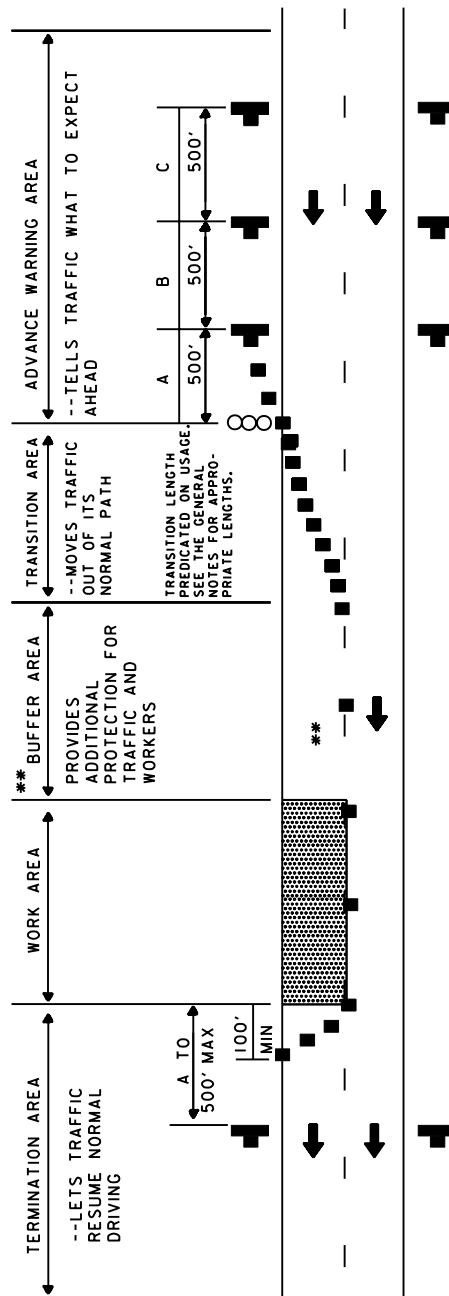

REFER TO STANDARD NO. MD 104.01-81
(TYPICAL APPLICATION NOTES)
FOR BUFFER LENGTHS.

SPECIFICATION		CATEGORY CODE ITEMS	
APPROVED		 DIRECTOR - OFFICE OF TRAFFIC AND SAFETY	
	APPROVAL • SHA REVISIONS		APPROVAL • FEDERAL HIGHWAY ADMINISTRATION
	APPROVAL 8-20-03		APPROVAL 9-23-03
	REVISED		REVISED
	REVISED		REVISED
REVISED		REVISED	

SIGN SPACING CHART

MD 104.01-02