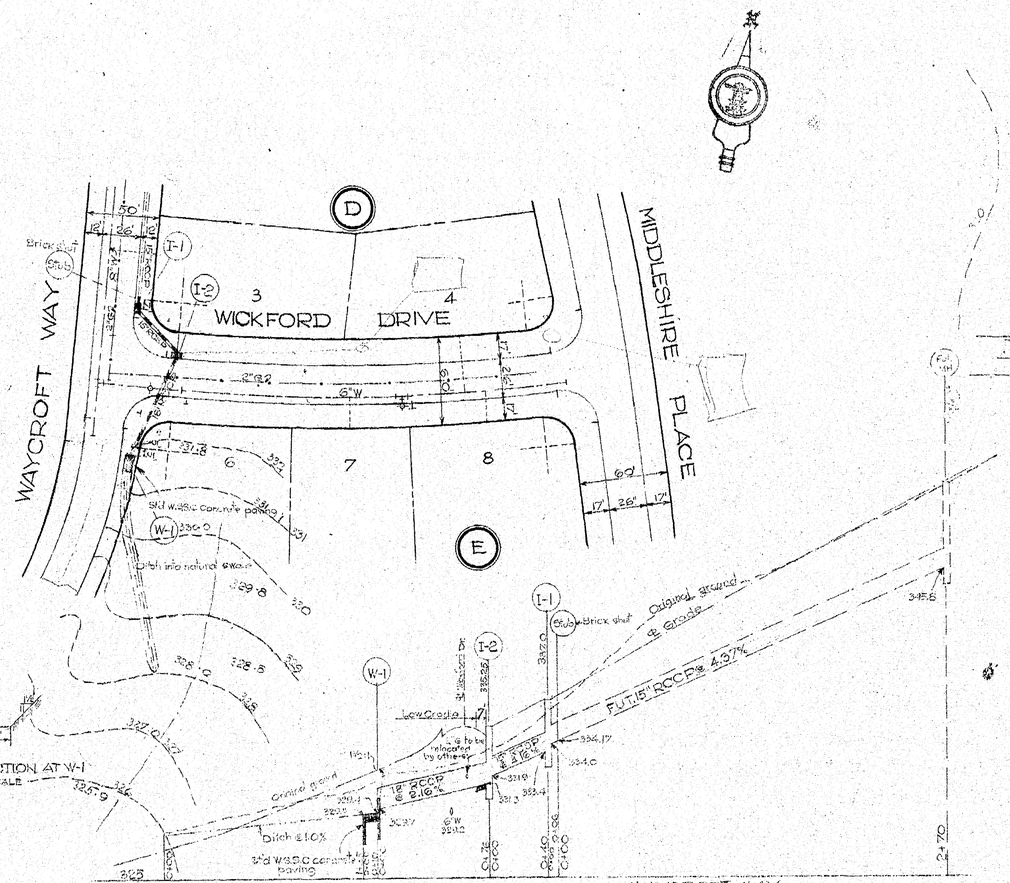

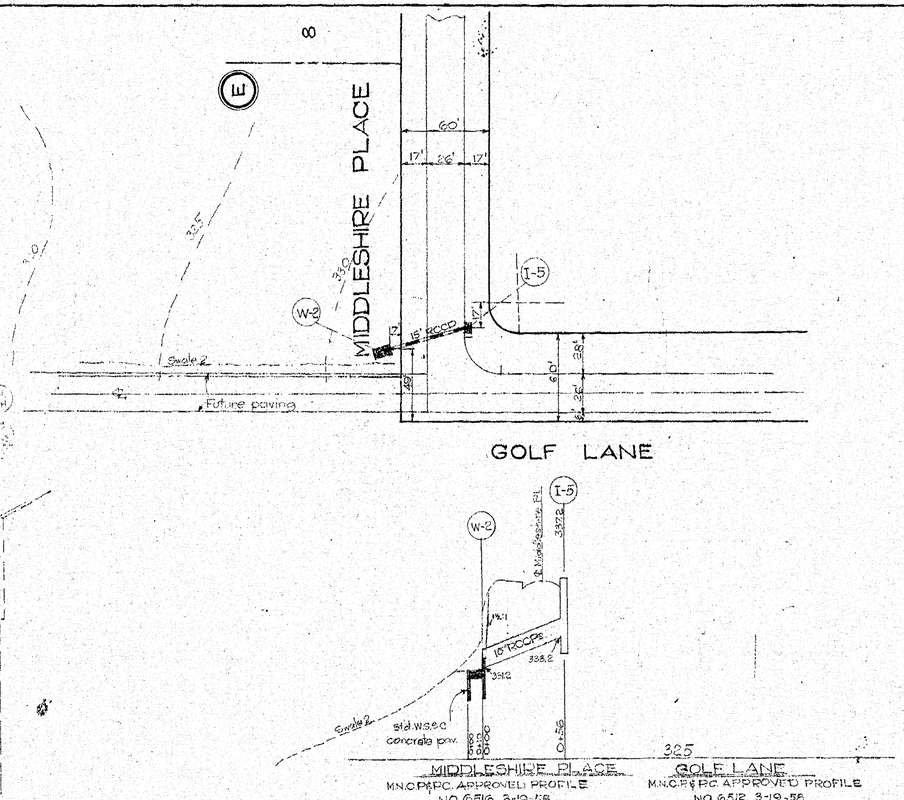

STRUCTURE SCHEDULE				PIPE SCHEDULE			
No.	Type	Top El.	Remarks	Dia.	Line	Leng.	ASTM Design
I-1	A-1	327.0	std W.S.S.C. Detail	15"	I-1 to I-2	38'	RCSP
I-2	A-1	325.25	" " "	15"	std. to I-1	4'	RCCP
W-1	Standard W.S.S.C. Cut-off Wall			18"	I-2 to W-1	74'	"

STRUCTURE SCHEDULE				PIPE SCHEDULE			
No.	Type	Top El.	Remarks	Dia.	Line	Leng.	ASTM Design
I-5	A-1	337.2	std W.S.S.C. Detail	15"	15 to W-2	54'	RCCP
W-2	Standard W.S.S.C. Cut-off Wall						

SD#D-19,58105Y

WASHINGTON SUBURBAN SANITARY COMMISSION
APPROVED September 26, 58
FOR SUBDIVISION PURPOSES ONLY

NOTHING TO PERMIT INSTALLATION OF WATER AND SEWER MAINS OR PERMIT FOR MAKING ANY PUBLIC CONNECTIONS.

THE OVERALL DRAINAGE STRUCTURES SHOWN ON THIS PLAN ARE APPROVED AS AN INTEGRAL PART OF THE OVERALL DRAINAGE SYSTEM FOR THIS SUBDIVISION. THE CONSTRUCTION, OPERATION AND MAINTENANCE WITHIN THE PUBLIC RIGHT OF WAY MAY BE CALLED TO ADJACENT PROPERTY OWNERS OR TO OTHER PROPERTIES AS A REACH OF THE DRAINAGE OF THE DRAINAGE STRUCTURES SHOWN HEREON.

James A. Stapp
CHIEF, DEVELOPMENT DESIGN ENGINEER

THE W.S.S.C. CONSTRUCTION DIVISION SHALL BE NOTIFIED THREE DAYS IN ADVANCE OF BEGINNING CONSTRUCTION.

GENERAL NOTES

1. All storm drains shall be constructed in accordance with the General Specifications of the Washington Suburban Sanitary Commission, adopted September 30, 1954.
2. Steps shall be provided in the channels of structures involving pipes larger than 27" in accordance with the Washington Suburban Sanitary Commission's Standard Detail.
3. Types of structures refer to the Washington Suburban Sanitary Commission's Standard Storm Drainage Details unless otherwise noted.
4. Information concerning underground utilities was obtained from available records, but the Contractor must determine the exact location and elevation of the mains by digging test pits by hand at all utility crossings well in advance of trenching.

MONTGOMERY COUNTY, MARYLAND
DEPARTMENT OF PUBLIC WORKS

FINAL APPROVAL

Date: _____

By: _____

File No. _____

Sheet 1 of 2

DEAN M. RATHBUN
11101 WAYCROFT WAY
WICKFORD, ROCKVILLE, MD.

MADDOX & HOPKINS
CIVIL ENGINEERS
SILVER SPRING, MD

STORM DRAIN PLAN
WICKFORD
WICKFORD DRIVE & WAYCROFT WAY
MONTGOMERY COUNTY, MARYLAND

Scale: 1" = 20 & 5'
Date: 5 Feb 58
Design: N.Z.
Drawn: [illegible]

CE487-362-1 , SD FILE NO. 366