SC 5593-4-267

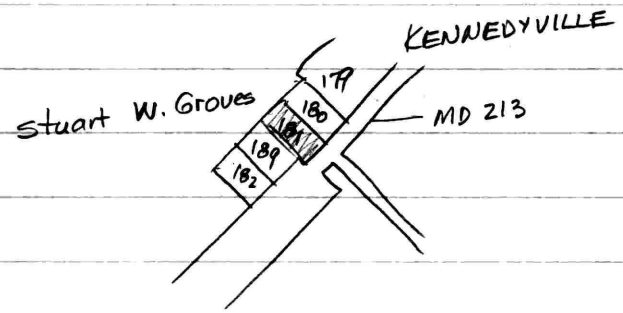

180 - Clarence W. Dixon Jr. — EHP 26/352, EHP 73/624 ?

181 James E. Smith — EHP 72/872, EHP 73/624

189 Stephen Timko — EHP 65/649, EHP 73/624

182 Geo T. Robinson — EHP 21/425, EHP 73/624

Smith EHP 72/872 (from Spencer)

Begin I.P. on N side Md. 213 at SW cor. Lot 1

w/ rd. along arc R = 7591.44, Lc. = 79.86 to I.P. & Lot 3

w/s N 40° 34' W - 194.59 to I.P.

N 50° 54' 30" E - 77.86 to I.P. & Lot 1

w/s S 41° 10' E - 192.17 to begin

Survey by McCrone 1961

EHP 73/419 - Assumption of mortgage from FHA

Dixon EHP 26/352

Begin N side Md. 213 at pt. S 43° 38' E - 5' from I.P.

w/ rd. along arc. R = 7609.44 Lc = 77.19

N 41° 22' W - 18

along arc. R = 7591.44, L = 22.98 to I.P. & Lot 2

w/s N 41° 10' W - 192.17 to I.P.

N 50° 54' 30" E - 91.39 " "

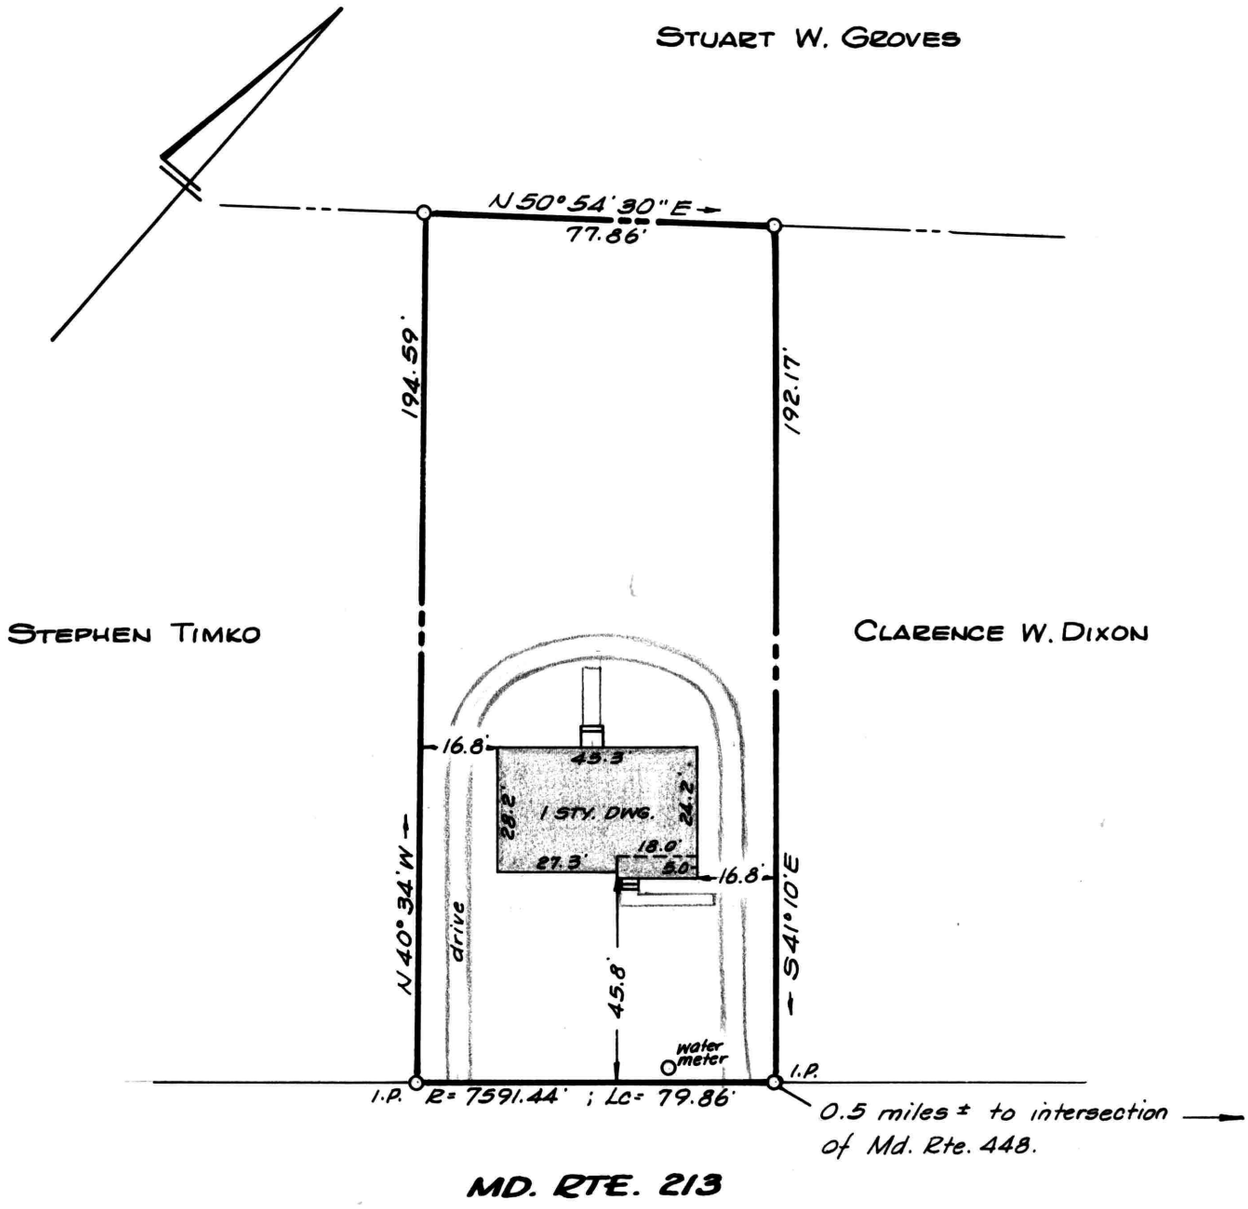

I hereby certify that the improvements indicated hereon are located as shown.

William R. Nuttle
4180

IMPROVEMENTS LOCATION

JAMES E. SMITH LANDS

2ND DISTRICT, KENT COUNTY, MD.

Scale 1"=40' Oct. 1977.

William R. Nuttle, Reg. Surveyor
Chestertown, Md.

I.P. = iron pipe

for David M. Usilton