

F-4-56
Wolfsville Survey District
Private

Ca. 1819-1940

The Wolfsville Survey District is centered on the intersection of Wolfsville, Stottlemyer, and Pleasant Walk Roads and the additional junction of Harp Hill Road near the south end of the village of Wolfsville, a rural community established in the first decade of the 19th century. The district contains primarily residences, with an 1847 church with 1893 and later alterations, a convenience store in a contributing 19th century commercial building, and three barns and several small domestic outbuildings. One of the barns is a dated 1819 stone structure with historical significance as a religious meeting place prior to 1847. The buildings are mostly log, frame, brick, and stone, with modern alterations and new construction usually in concrete block, vinyl, aluminum, and asbestos shingle. The district's significance is based on its virtually unchanged character as a small crossroads town of the period 1840-1940. Wolfsville, unlike Myersville and Middletown, was not on the electric railroad line and did not experience the sometimes sweeping changes in buildings, architectural styles, and economic life that the transportation networks brought. It has always been a small commercial center based on the agricultural and domestic needs of the surrounding rural area.

F-4-56
Wolfsville Survey District
Wolfsville
Frederick County

HISTORIC CONTEXT:

MARYLAND COMPREHENSIVE HISTORIC PRESERVATION PLAN DATA

Geographic Organization: Piedmont
(Harford, Baltimore, Carroll, Frederick, Howard, Montgomery
Counties, and Baltimore City)

Chronological/Development Period:
Agricultural - Industrial Transition, A.D. 1815-1870
Industrial/Urban Dominance, A.D. 1870-1930
Modern Period, A.D. 1930-Present

Prehistoric/Historic Period Themes
Agriculture
Architecture, Landscape Architecture, Community Planning
Economic (Commercial)
Religion

Resource Types:

Category: District

Historic Environment: Village

Historic Function and Use:
Domestic/single dwelling/residence
Domestic/secondary structure/smokehouse
Domestic/secondary structure/other dependencies
Commerce/Trade/department store/general store
Commerce/Trade/specialty store
Religion/religious structure/church
Agriculture/subsistence/animal facility/barn

Known Design Source: None

7.1 Description (Continued)

Following are brief descriptions of the contributing buildings:

Leatherman Store (Harne's Store), 12487 Wolfsville Rd.: The present store includes two 2-story sections at the southeast corner of the square facing on both Wolfsville and Stottlemyer Roads, with a small one-story link at the corner which contains the current main entrance. The exterior of the entire building is covered with gray composition siding and the roof is standing seam metal. Incorporated within the building are sections with log structure. The south section has an elongated west elevation with a five-bay irregular facade. The southern three bays contain a residence with a one-story porch covering the entrance which is inserted between two bays. The porch has turned columns and a scroll-sawn balustrade. The chimneys are interior and interior end placements, reflecting several periods of addition and enlargement over many years as the store passed from owner to owner. The sash is 2/2 with plain frames. The Stottlemyer Road section has a more regular 4-bay facade with unused entrances at the outer bays on the first story under a full-width canopy with brackets. The sash is 2/2 with arched frames on the first story and 6/6 on the second story. A one-story concrete block extension is located on the east end of the building. The tributary stream runs behind the two store buildings, separating the store and residence from a concrete block garage on the south side of the stream, which appears to have been built in the 1930's. The east elevation of the Wolfsville Road section has an open porch facing the rear of the lot. The store was probably in existence by 1850 and the 1873 map shows two separate buildings on the site, with the Wolfsville Road building identified as F. Leatherman's Store. Over the years, the store has had at least 9 successive owners, the latest owner being the daughter of Milton W. Harne, who had been the proprietor since 1945.

Salem United Brethren Church (Salem United Methodist Church): Built in 1847 and rebuilt in 1893, according to a stone plaque in the gable of the present building, the original section is a one-story hall type church with a gable roof and a modern foyer on the west elevation. The exterior is covered with stucco painted white. A steeple with an open belfry stands at the west end of the composition-covered roof. The north elevation has three bays with 6/6 sash. Adjoining the south elevation is a 1967 Sunday School building also covered with white stucco. The interior of the church has been much remodeled, retaining only its one-room plan with new furnishings and fixtures. From about 1819, the United Brethren congregation met in homes and barns, particularly the Hoover stone barn (described later) at the south edge of the survey district. The building of the 1847 church signaled the period of modest growth in Wolfsville, indicating a growing congregation and the ability to finance a separate building for worship. In 1968, the Brethren Church united with the Methodists and the church became Salem United Methodist Church.

Stottlemyer Barn and Springhouse, 12463 Wolfsville Rd.: The dwelling on the north side of Wolfsville Road is a modern structure which replaced an earlier building probably built by Elias Stottlemyer in the second quarter of the 19th century. The stone two-level springhouse and the frame bank barn were associated with the earlier dwelling. The springhouse is located northwest of the present house and has fieldstone walls with boarded openings on each

7.2 Description (Continued)

elevation and a lower level entrance on the south gable end. The roof is standing seam metal, and an interior chimney is located on the north elevation. The frame bank barn is located east of the house with its ramp on the south elevation opening to Wolfsville Road. It has vertical siding with a stone foundation and the forebay on the north elevation. The double swing doors on the south elevation have the traces of painted arches. The roof is standing seam metal. A concrete block milk house probably built in the 1940's stands just southwest of the barn.

Hoover House, 12328 Harp Hill Rd.: The two-story stone dwelling was built about 1819, the date being recorded on the stone barn on the east side of Harp Hill Road. The house has a three-bay elevation facing east with a late-19th century one-story porch. The porch has a decorative frieze in a zig-zag style reminiscent of Chippendale designs. The same frieze is found on the Jefferson Wolf House, 12504 Wolfsville Rd. The Hoover House has interior end chimneys and a standing seam metal roof. A two-story rear wing extends from the northwest corner. The sash is 2/2. Domestic outbuildings include a frame privy and a frame smokehouse, both with vertical siding and standing seam metal roofs. The stone foundation of a log springhouse is located northwest of the house. This was demolished in the mid-1980's and was thought to have been the earliest extant structure in Wolfsville, possibly built prior to 1819 for use as a dwelling while the stone house was being erected. The Hoover House was the site of early United Brethren worship services prior to the building of the church in 1847. In the late 19th and early 20th centuries, until the 1930's, the house was a summer resort and boarding house called the Hoover House. It remained in the Hoover family until 1949 when the current owners purchased the property.

Hoover Barn: Located on the east side of Harp Hill Road directly opposite the Hoover House, the stone barn dominates the view of Wolfsville from Harp Hill Road. The plan is the traditional German style stone barn with a banked entrance on the south and double vertical board swing doors at the top of the ramp. Narrow vertical vent openings are located in the south, east, and west elevations. The roof is stand seam and corrugated metal. A frame forebay extends over the stall level on the north elevation. The barn is in rather deteriorated condition. The date 1819 is found on a stone at the southeast corner of the building. Currently used for storage, the barn no longer functions as an agricultural building. The larger early United Brethren worship meetings took place here as well as in the Hoover House before the erection of the 1847 church. A centennial commemorative meeting took place in 1919 and other ceremonies have been held in the barn every decade or so.

J. J. G. Hoover House & Store: Probably built about 1845-50, the present two-story structure may have some log materials within the aluminum-covered exterior. The basement level is faced with brick. The house has three irregular bays with altered windows on the first story and a one-story porch. The windows are 2/2 and the lintels and frames on the second story are molded. A two-story rear wing extends from the northwest corner and an exterior staircase leads to the second story. A non-contributing garage is also located on the property. The building was used as a combination residence and

7.3 Description (Continued)

confectionery store in the late 19th and early 20th centuries; it is currently a duplex dwelling.

Jacob D. Wolf House; Smith Shoe Shop, 12486 Wolfsville Road: The two-story fieldstone dwelling is located on the southwest corner of the square and has four bays with a one-story porch and a two-story rear wing which stands at the edge of Pleasant Walk Road. Possibly built about 1865, it has double entrances in the outer bays and 6/6 sash. The standing seam metal roof has a center chimney. The doors have 6 panels, partially glazed. The rear wing has vinyl siding. The porch has square posts supported on rusticated concrete block bases, indicating that it is an early 20th century addition. The house was purchased by Jacob D. Wolf from Gideon Hoover in 1868. By 1876, Jacob Smith had acquired the property, having both his residence and a shoe shop in the house until the early 20th century.

Jefferson Wolf House, 12504 Wolfsville Rd.: The two-story dwelling probably has log structure under the present aluminum siding. It has three bays with a one-story porch and a two-story rear addition enlarging a probable smaller original wing. The windows are 2/2 with replacement shutters on all elevations except the first story on the east elevation. Here the original fenestration has been altered, with a picture window replacing the original two bays. The entrance is in the remaining bay. The roof is standing seam metal and the chimney is an exterior concrete block type on the north elevation. The rear wing has a two-story enclosed porch on the north side. A non-contributing concrete block garage is also on the property. The house may have been built by 1850 and has remained residential, unlike the other buildings surrounding the square. Jacob Wolf, Jr. may have built the house, and Jefferson Wolf acquired it in 1895.

Wolf-Ott Blacksmith Shop, 12432 Wolfsville Rd.: The two-story stone and log building was apparently built as a blacksmith shop, as one is shown in the approximate location of the house on the 1873 Titus map. Currently it is a dwelling facing Pleasant Walk Road. The first story is random ashlar stone and the log and frame upper section is covered with vinyl siding. The original appearance is difficult to discern with the several periods of alteration that have occurred. A one-story rear shed addition is on the north side of the building and the south elevation has a two-story open porch. The roof is standing seam metal. Windows are replacement 1/1 sash. According to the Wolfsville history written in 1972, Jefferson Wolf owned the blacksmithy, which was operated by John Ott. A small frame barn with vertical siding and a standing seam metal roof is located near the small tributary stream which crosses Pleasant Walk Road at the west boundary of the survey district. It was probably built in the 1890's. Near the road just east of the shop was a small log outbuilding locally known as "Bum's Inn" which was a gathering place in the late 19th and early 20th centuries. The Wolfsville Bank held practices in it and other recreational activities took place there. It was demolished possibly in the 1930's.

Donohoo Store; Stottlemeyer Store, 12509 Wolfsville Rd.: Located on the northeast corner of Wolfsville and Stottlemeyer Roads, the two story log and

7.4 Description (Continued)

frame building was built about 1870 as a store and residence by Jacob D. Wolf, who leased it to several store proprietors over the years until the late 1920's. The building has an irregular bay arrangement resulting from several changes in use on the west elevation under a full-width one-story porch. The exterior is covered with german siding. The windows on the second story are 2/2. On the first story is a large central doorway with sidelights probably added in about 1930 when the last major alteration was made. A second entrance is located at the north end of the elevation, with a pair of 1/1 windows between the two doorways. The gable roof is standing seam metal and an interior chimney is located at the south end. A general store operated by John Donohoo in the 1870's and 1880's is the first of many commercial uses. The second story was rented for meetings and was known as Baughman's Hall. In the late 19th century, at least part of the building was a physician's office, Dr. Lamar. In 1927, Asa P. Stotemyer opened an automobile repair garage in the south end of the building, for which a large opening to the shop was made in the west elevation. The break in the concrete porch platform indicates the location of the repair garage; it is now covered by siding and a single window bay. The rest of the building was Stotemyer's residence. In 1934, Stotemyer opened a general store which operated until 1971. The building is currently in partial use as office space for George C. Harne, Architect.

Recher House, 12406 Stotemyer Rd.: The two-story log or frame house had vinyl siding and an irregular bay arrangement. The first story on the south elevation has three bays and the second story has two. The windows are 6/6. A one-story porch with turned columns extends across the facade. The roof is slate and the chimney is an exterior concrete block replacement of the original interior end flue. A two-story rear wing has a one-story shed porch on the east side. A frame garage with composition siding and a standing seam roof is located behind the house. Probably built about 1880, the house was one of several store and residence combinations on the north side of Stotemyer Road. Amanda and Alberta Recher had a millinery shop in the late 19th century and other occupants have included a doctor's office and a confectionery shop.

Frame shop, 12406 Stotemyer Rd.: The small frame building is on the same lot as the Recher House and has had many commercial uses over time. Built about 1880-1890, it is one story in height with a storage attic. The south elevation has a gable facade with two bays and a single entrance with 6/6 windows and a 4-panel door. The siding is german and the roof is standing seam metal. A second entrance is on the west elevation, along with two 6/6 windows. An extension of the building is attached to the north elevation. The uses of the building, which is now a storage shed, include a confectionery shop, a butcher shop, a newspaper office for the Catoctin News which was published in the 1880's and 1890's, a shoe shop operated by Jacob Smith, and a barber shop.

Lewis Lamar House; Pryor Store, 12408 Stotemyer Rd.: The two-story frame house was probably built about 1877 by Lewis Lamar, a physician. It had three bays in its original form and a fourth bay has been added to the west end of the house. The exterior is covered with german siding and the house has two entries, one in the added bay. The added bay may have been the physician's office. The windows are 6/6. A one-story porch with turned columns extends

7.5 Description (Continued)

across the south elevation. The roof is standing seam metal. The chimney is located at the original west end, now enclosed by the additional bay. Also on the property are a frame summer kitchen with asbestos shingle siding and a standing seam metal roof. The windows are 2/2 with molded lintels and the door is a four-panel type. The chimney is located on the north interior wall. A frame smokehouse has tongue-and-groove siding and a composition roof. In the 1920's, Rooklyn Pryor ran a small general store in the first story of the house.

Dusing House, 12412 Stottlemeyer Rd.: Possibly built between 1867 and 1872 by Elias Dusing, the dwelling is a gable-fronted two-story frame building with asbestos shingle siding and a one-story porch. It has three bays on the first story and two on the second story. The sash is 2/2. The porch has turned columns. The side elevations have irregular bays with similar sash. The roof is standing seam metal with a central chimney.

Samuel Holter Store, 12416 Stottlemeyer Rd.: This two-story brick dwelling was built as a combination store and residence about 1870. On the 1873 map, S. Holter is shown as the storekeeper and postmaster. The house has stretcher bond walls painted white, with four bays originally and an added fifth bay on the east gable end. There are two entrances and 6/6 sash with plain lintels flanked by paneled shutters on the first story. The roof is standing seam metal with interior end chimneys. A one-story porch with modern iron columns extends across the south elevation. A one-story rear shed addition with asbestos siding extends to the north. A frame garage with a hipped roof and german siding is located northeast of the house. The general store went through several hands in the late 19th century, including Phleegeer and Schroyer in the 1880's, Jonathan English in the 1890's, and at least two generations of the Pryor family in the early 20th century.

John Wesley Hoover House, 12415 Stottlemeyer Rd.: The two-story brick house had a five-bay north elevation with a small porch sheltering the center three bays. Two entrances are located in alternating bays. The windows are 6/6 with plain lintels and sills. The roof is standing seam metal and the chimney is located at the interior east wall, and a patch at the west end indicates a removed second chimney in that location. A scroll-sawn bargeboard ornaments the cornice line. A log or frame smokehouse is located south of the house with german siding and a composition roof. A frame garage with german siding and a standing seam gable roof is located southeast of the house. A frame chicken house stands on the south bank of the tributary stream which runs behind the house. The outbuildings, except the garage, probably date from about 1900. The garage may have been built in the 1930's. In the Wolfsville history of 1972, the house is described as having been a general store run by John Duble, the owner in the 1880's, and a boarding house in addition to a residence.

Jacob Wolf House, 12511 Wolfsville Rd.: This house appears on the 1873 Titus map as one of the Jacob Wolf properties. It has two stories, three bays, and a cross gable on the west elevation. A one-story porch extends across the elevation. The frame house is covered with vinyl siding and the 1/1 sash and metal shutters are replacements of the originals. The roof is composition

7.6 Description (Continued)

material. A polygonal one-story bay is located on the first story. A two-story rear wing has a two-level open porch. The outbuildings are a small frame barn with vertical siding and a stone smokehouse with a standing seam roof and an interior brick chimney. A frame garage with german siding, a standing seam metal roof, and replacement lift doors is also on the property. The house was probably built about 1865-1870. From about 1892 to 1940, it was a millinery shop and residence of George and Lillie Stottlemeyer, who added the bay window as a display window.

Maugans House, 12517 Wolfsville Rd.: This frame house was built about 1897 by John Maugans, one of the several proprietors of the store now called Harne's Store. It has an irregular L-plan with an extended gable roof over the small porch at the angle between the two wings. The porch once extended to the front of the gable portion of the west elevation, but has been removed. The exterior is covered with asbestos siding over german siding, visible where the porch roof has been removed. The roof is standing seam metal. The windows are 2/2 with molded lintels. The chimney is located near the center of the roof. A rear 2-story wing has a one-story porch with brackets and turned columns. A frame outbuilding may have been a summer kitchen; it has vertical siding and an exterior stone and brick chimney with a standing seam metal roof. The house is currently unoccupied.

Stephens-Warrenfeltz House, 12521 Wolfsville Rd.: This house may have been built about 1970. It has a traditional vernacular plan with two stories, three bays, and a one-story porch with turned columns. It has aluminum siding and 1/1 sash. The roof is standing seam metal and the chimneys are at the interior gable ends. A deteriorated frame chicken house and five other deteriorated frame outbuildings are located east of the house, which is currently unoccupied. A non-contributing concrete block repair shop built in 1952 is located south of the house.

12536 Wolfsville Rd.: The 2-1/2-story house has a cross gable on the east elevation with a three-bay facade and a one-story porch wrapped around from the east to the south elevation. The frame house is covered with vinyl siding and has a patterned slate roof. The corners of the east elevation are diagonal, a variation of the late 19th century on the traditional plan. The chimneys are located at the interior ends, one having been replaced with an exterior concrete block flue. The house was probably built about 1890.

Bungalow, 12544 Wolfsville Rd.: This is the only bungalow in the survey district. Built about 1929-1930, it has 1-1/2 stories and is covered with aluminum siding. It has three bays and a one-story porch with tapered columns on the east elevation. The column bases are brick. The gable roof has a center dormer with three 3/1 windows. The roof is composition material. A two-story rear addition with an exterior brick chimney is located on the west elevation. A frame, hipped roof garage with original battened doors is located south of the house.

9. Major Bibliographical References

Survey No. F-4-56

Bond, Isaac, Map of Frederick County, 1858.

Land Records of Frederick County

Martin, Charles S., and Tom Rose. The History of Wolfsville & the Catoctin District.
Wolfsville Ruritan Club, 1972

10. Geographical Data

Acreege of nominated property 20 acres

Quadrangle name Myersville, Md.

Quadrangle scale 1:24000

UTM References do NOT complete UTM references

A	<input type="text"/>	<input type="text"/>	<input type="text"/>
	Zone	Easting	Northing

B	<input type="text"/>	<input type="text"/>	<input type="text"/>
	Zone	Easting	Northing

C	<input type="text"/>	<input type="text"/>	<input type="text"/>
---	----------------------	----------------------	----------------------

D	<input type="text"/>	<input type="text"/>	<input type="text"/>
---	----------------------	----------------------	----------------------

E	<input type="text"/>	<input type="text"/>	<input type="text"/>
---	----------------------	----------------------	----------------------

F	<input type="text"/>	<input type="text"/>	<input type="text"/>
---	----------------------	----------------------	----------------------

G	<input type="text"/>	<input type="text"/>	<input type="text"/>
---	----------------------	----------------------	----------------------

H	<input type="text"/>	<input type="text"/>	<input type="text"/>
---	----------------------	----------------------	----------------------

Verbal boundary description and justification

Boundary approximately as shown on attached USGS quad section map.

List all states and counties for properties overlapping state or county boundaries

state	code	county	code
state	code	county	code

11. Form Prepared By

name/title	Janet L. Davis, Historic Sites Surveyor		
organization	Frederick County Planning & Zoning Dept.	date	May 1992
street & number	12 E. Church Street	telephone	696-2958
city or town	Frederick	state	Md. 21701

The Maryland Historic Sites Inventory was officially created by an Act of the Maryland Legislature to be found in the Annotated Code of Maryland, Article 41, Section 181 KA, 1974 supplement.

The survey and inventory are being prepared for information and record purposes only and do not constitute any infringement of individual property rights.

return to: Maryland Historical Trust
 Shaw House
 21 State Circle
 Annapolis, Maryland 21401
 (301) 269-2438

MARYLAND HISTORICAL TRUST
 DHCP/DHCE
 100 COMMUNITY PLACE
 CROWNSVILLE, MD 21032-2023
 410-7500

8. Significance

Period	Areas of Significance—Check and justify below			
<input type="checkbox"/> prehistoric	<input type="checkbox"/> archeology-prehistoric	<input type="checkbox"/> community planning	<input type="checkbox"/> landscape architecture	<input checked="" type="checkbox"/> religion
<input type="checkbox"/> 1400-1499	<input type="checkbox"/> archeology-historic	<input type="checkbox"/> conservation	<input type="checkbox"/> law	<input type="checkbox"/> science
<input type="checkbox"/> 1500-1599	<input checked="" type="checkbox"/> agriculture	<input type="checkbox"/> economics	<input type="checkbox"/> literature	<input type="checkbox"/> sculpture
<input type="checkbox"/> 1600-1699	<input checked="" type="checkbox"/> architecture	<input type="checkbox"/> education	<input type="checkbox"/> military	<input type="checkbox"/> social/ humanitarian
<input type="checkbox"/> 1700-1799	<input type="checkbox"/> art	<input type="checkbox"/> engineering	<input type="checkbox"/> music	<input type="checkbox"/> theater
<input checked="" type="checkbox"/> 1800-1899	<input checked="" type="checkbox"/> commerce	<input type="checkbox"/> exploration/settlement	<input type="checkbox"/> philosophy	<input type="checkbox"/> transportation
<input checked="" type="checkbox"/> 1900-	<input checked="" type="checkbox"/> communications	<input type="checkbox"/> industry	<input type="checkbox"/> politics/government	<input type="checkbox"/> other (specify)
		<input type="checkbox"/> invention		

Specific dates C. 1819-1940 **Builder/Architect**

check: Applicable Criteria: A B C D
 and/or
 Applicable Exception: A B C D E F G
 Level of Significance: national state local

Prepare both a summary paragraph of significance and a general statement of history and support.

The Wolfsville Survey District is an excellent example of a small rural community of the early 19th century with minimal changes in its character from about 1819 to 1940. The available 19th century maps of 1858 and 1873 show that the village has remained a loose assembly of about 15-20 major buildings, mostly residences or combination stores and residences, with the most growth taking place roughly during the period from about 1840 to 1900. The town's center has always been a place of commercial activity, with at least two stores or shops being active at any point in time from about 1860 to the 1970's. The village is currently mostly residential, with only one general store building still in operation as a convenience store. The commercial opportunities generated by the meeting of several rural roads and the connection to Smithsburg in Washington County, the nearest large town, brought the village into being and the dwellings built were those of the storekeepers, blacksmiths, shoemakers, milliners, and others. The development of the village remained at a slow pace throughout the late 19th century, unlike the growth of Myersville and Middletown, which were linked to Frederick and Hagerstown from 1896 onwards by electric trolley lines, stimulating vigorous growth of housing and business both in the town and surrounding country. Wolfsville experienced no effect from the trolley line, the nearest rail line being the Western Maryland stop in Smithsburg. Even the advent of the automobile did not bring much change to the town. The buildings are all of the traditional style and materials of the 19th century: log, frame, brick, and stone. The only touches of national styles are found in the circa 1930 bungalow and the circa 1897 frame house on the north end of the survey district. Recent times have brought changes in exterior siding and roofing, as well as enclosures of rear wings and replacement of garages and outbuildings by concrete block. The only church in the survey district also shows the effect of modern building methods, with a stucco exterior over the 1847 stone original section and a modern Sunday School wing. Only two dwellings built within the last 20 years are non-contributing, as is the 1972 elementary school.

7. Description

Condition		Check one	Check one	
<input type="checkbox"/> excellent	<input type="checkbox"/> deteriorated	<input type="checkbox"/> unaltered	<input checked="" type="checkbox"/> original site	
<input checked="" type="checkbox"/> good	<input type="checkbox"/> ruins	<input checked="" type="checkbox"/> altered	<input type="checkbox"/> moved	date of move _____
<input checked="" type="checkbox"/> fair	<input type="checkbox"/> unexposed			

Prepare both a summary paragraph and a general description of the resource and its various elements as it exists today.

CONTRIBUTING RESOURCE COUNT: 34

The Wolfsville Survey District encompasses approximately 20 acres centered on the intersection of Wolfsville, Stottlemyer, and Pleasant Walk Roads in the unincorporated village of Wolfsville, a rural community located in the northern section of the Middletown Valley in Frederick County, Maryland, which was established in the first decade of the 19th century and which achieved its greatest period of growth in the period about 1840-1900. The survey district contains approximately 41 buildings, of which 33 (80%) contribute to its significance. The buildings are residences, domestic outbuildings, a general store, a church, and three barns, one of which is a dated 1819 stone building. The other buildings range in date from about 1819 to about 1930. The architectural styles represented in the survey district are principally the vernacular style based on German traditional dwellings of the late 18th and early 19th centuries, with some influence of the historical revival styles of the late 19th century apparent in rooflines, window details, and decorative porch details. The district also has one bungalow of about 1930. The commercial buildings include two general stores, one of which is still in operation, the other being an office building, and a small frame shop building currently used for storage. In addition, most of the dwellings have had periods of use as combined commercial/residential buildings. Among the non-contributing buildings of the survey district are a small architectural office and a current unoccupied repair shop. Most of the other non-contributing buildings are modern garages and other outbuildings, and the 1972 Wolfsville School. The stone church, originally built in 1847 and considerably rebuilt in 1893, has a stucco exterior with a modern foyer and an adjoining 1967 addition. The buildings of the district are closely sited in the immediate vicinity of the central crossroads, which is locally referred to as "the square". The village plan has an additional road junction near the south end of the survey district, in common with many other towns and villages of the 19th century, in which road patterns followed physical features rather than regular plans leading to major junctions.

The predominant building materials are log, frame, brick, and stone, with most wood buildings having modern artificial siding. Roofs are usually gable types with standing seam metal, slate or composition coverings. Most buildings have a one-story porch on the main facade. The condition of the buildings varies from deteriorated to excellent. The 1873 Titus Atlas map shows Wolfsville had 15 buildings, 12 of which are still extant, in a loose grouping around the square. The missing buildings include a dwelling which has been replaced with a modern residence, a blacksmith shop, and an unidentified outbuilding. The environment of the survey district is rural, with open agricultural fields visible from almost any point in the district. Most of the modern development in the vicinity has taken place within the past 20 years and remains relatively unobtrusive visually. Middle Creek runs generally northwest to southeast along the east side of the survey district, generally forming its eastern boundary, and a small unnamed tributary crosses the district from west to east, joining the creek just east of the district.

(Continued on separate sheet)

Maryland Historical Trust State Historic Sites Inventory Form

MARYLAND INVENTORY OF HISTORIC PROPERTIES

Magi No.

DOE yes no

1. Name (indicate preferred name)

historic Wolfsville Survey District

and/or common

2. Location

12328 Harp Hill Rd.; 12400 block - 12544 Wolfsville Rd.;

street & number 12406-12416 Stottlemyer Road not for publication

city, town Wolfsville vicinity of congressional district 6th

state Maryland county Frederick

3. Classification

Category	Ownership	Status	Present Use	
<input checked="" type="checkbox"/> district	<input type="checkbox"/> public	<input checked="" type="checkbox"/> occupied	<input checked="" type="checkbox"/> agriculture	<input type="checkbox"/> museum
<input type="checkbox"/> building(s)	<input type="checkbox"/> private	<input type="checkbox"/> unoccupied	<input checked="" type="checkbox"/> commercial	<input type="checkbox"/> park
<input type="checkbox"/> structure	<input checked="" type="checkbox"/> both	<input type="checkbox"/> work in progress	<input checked="" type="checkbox"/> educational	<input checked="" type="checkbox"/> private residence
<input type="checkbox"/> site	Public Acquisition	Accessible	<input type="checkbox"/> entertainment	<input checked="" type="checkbox"/> religious
<input type="checkbox"/> object	<input type="checkbox"/> in process	<input checked="" type="checkbox"/> yes: restricted	<input type="checkbox"/> government	<input type="checkbox"/> scientific
	<input type="checkbox"/> being considered	<input type="checkbox"/> yes: unrestricted	<input type="checkbox"/> industrial	<input type="checkbox"/> transportation
	<input checked="" type="checkbox"/> not applicable	<input type="checkbox"/> no	<input type="checkbox"/> military	<input type="checkbox"/> other:

4. Owner of Property (give names and mailing addresses of all owners)

name Multiple property owners

street & number telephone no.:

city, town state and zip code

5. Location of Legal Description

courthouse, registry of deeds, etc. Frederick County Courthouse liber

street & number 100 W. Patrick Street folio

city, town Frederick state Md. 21701

6. Representation in Existing Historical Surveys

title

date federal state county local

depository for survey records

city, town state

Wolfsville S.D.

LIBER/FOL	GRANTEE	GRANTOR	ORIGINAL TRACTS	COST	DATE
799/219 P. 18 12328	Harp Hill (Hoover House)		"Hoover Home"		
477/329 31 Jan 49	Gladys A. & Harry S. Blüchenstabb Jr.	Asbury E. & Mary J. Hoover	54a.		
DHH 13/722 16 Jun 02	Asbury E. Hoover	John J. Hoover, exx. of last will of Gideon Hoover	"Hoover's Home" 58a.	\$4,733.43	
P. 168 623/458 24 Aug 59	Church (School site) Salem Evangelical Church of the United Brethren in Christ	Board of Education	3.7 a.	\$5,650	
HWB 310/146 11 Aug 17	Board of County School Commission	Asbury E. & Mary J. Hoover	(Includes plat) 3.7 a.	\$1,050	
DHH 13/722 16 Jun 02	Asbury E. Hoover	John J. S. Hoover, exx. of Gideon Hoover			
P. 108 124 1579/599 31 Jul 89	78 A & B Wolfsville Rd. John M. & Jeannine R. Brewer III	Clarence A. & Elsie E. Flook		\$118,000	
692/663 4 Nov 63	Clarence A. & Elsie E. Flook	Milton W. & Catherine D. Haine			
583/589 18 Jun 57	Milton W. & Catherine D. Haine	Harold S. Haine			

F-4-56

LIBER/FOL.	GRANTEE	GRANTOR	ORIGINAL TRACTS	COST	DATE
449/217 P. 108 12478 570/581 2 Oct 56	A+B Wolfswille Rd. Harold G. Haine	(cont.) Edwin J. Nicks, trustee in Equity 18396, & Frank W. Blickenstaff		\$3,300	
449/217 16 Jun 45	Frank W. Blickenstaff & Elizabeth C. Blickenstaff, infant	Helen L. Huffer			
449/217 16 Jun 45	Helen L. Huffer	Sammie C. Klein, widow, & Frank W. Blickenstaff			
	Sammie C. Klein & Frank W. Blicken staff	Helen L. Mock			
P. 42 12504 1166/816 26 Feb-82	Wolfswille Rd. Thomas C. & Mabel H. Grossnickle	Thomas C. Grossnickle	N.W. corner of the square		
566/208 13 Jun 56	Thomas C. Gross- nickle	Roy E. & Margaret C. Grossnickle	20 A.		
529/369 2 Apr 54	Roy E. & Margaret C. Grossnickle	H. Kieffer Delauter	20 A.		
529/367 2 Apr 54	H. Kieffer Delauter	Thomas C. Grossnickle et al, heirs of Elmer & Annie Grossnickle			
376/244 3 Oct 30	Elmer & Annie Grossnickle	Cora M. Wolfe, Admin istrator of Made H. Wolf		\$3750	

F-4-56

4212504 Wolfsville Rd.

LIBER/FOL

GRANTEE

GRANTOR

ORIGINAL TRACTS

COST

DATE

~~799/517~~
370/212
13 Feb 28

Wade H Wolf

Harry D. Wolf, et al

JLJ 14/409
15 Aug 1895

Jefferson M. Wolf

Jacob + Mary R. Wolf

26 A.
Land with improve-
ments

\$100

(no earlier refs)

P. 118 12486

Wolfsville Rd.

890/5
15 Sept 72

Wm. D. + Sally J.
Reddle

Lauren M. Wolf

821/664
7 Apr 70

Lauren M. Wolf

George B. + Anna L.
Gilmore

718/166
2 Feb 65

George B. + Anna
L. Gilmore

Howard E. + Betty
M. Brandenburg

625/109
1 Sept 59

Howard E. +
Betty M. Branden-
burg

Herman D. + Donna L.
Kline

"Stottlemyer
Homestead"

474/515
30 Sept 48

Herman D. Kline
et ux

Charles M. Kline,
widower

"Stottlemyer
Homestead"

439/292
8 Feb 43

Charles M. Kline

Austin L. + Mary E.
Kline

\$1201

F-4-56

LIBER/FOL	GRANTEE	GRANTOR	ORIGINAL TRACTS	COST	DATE
799/219 P. 118 124 86	Wolfsville Rd. (cont.)				
426/189 18 Dec 40	Austin L. Kline et ux	Eva A. Beitley, trustee in estate of Elizabeth C. Stottlemeyer	1/3 A. Stottlemeyer	\$1201	
Well Record	Elizabeth C. Stottlemeyer dan. of Jacob Smith	Jacob ^{sr.} Smith			
TG 5/452 1 Apr 1876	Jacob G. Smith	Mary E. Martin & Scott S. Martin	"Hoover's Home"	\$2,000	
CM 10/24 18 Mar 1873	Mary E. Martin	Jacob D. Wolf		\$2,000	
CM 1/319 27 Feb 1868	Jacob D. Wolf	Hidden Hoover (no earlier refs)	68 sq. perches	\$500	
P. 148 124 87	Wolfsville Harness Store				
5 83/589 18 Jun 57	Milton W. & Catherine J. Haine	Harold G. Haine	1. 12 2/160 A. 570/581 2. 5 70/580 C see 12 478 Wolfsville Rd. chain)		
P. 149 124 15	Stottlemeyer Rd.				
553/316 22 Oct 55	Arnold R. & Goldie May Draper	Wilmer ^{C.} & Victoria M. Pouick	1 A., 16 p.		
504/213 23 Feb 52	Wilmer ^{C.} & C. Pouick et ux	Acil B. & Faith K. Preyer			

F-4-56

LIBER/FOL	GRANTEE	GRANTOR	ORIGINAL TRACTS	COST	DATE
299/219 P. 149 12415	Stottlemeyer Rd. (cont.)				
481/104 13 Aug 49	Ceil B. Pryor et sup	Richard A. & Gladys R. Martin			
423/128 19 Feb 40	Richard A. Martin et ux	Ray M. & Mabel B. Kline		\$1,200	
416/549 1 Apr 37	Ray M. Kline et ux	Charles M. & Susie O. Kline		\$600	
362/111 3 Mar 25	Charles M. & Rosa v. Kline (Rosa died; Charles remarried)	Charles E. Koogle, trustee in Equity 11062 John D. Duliel		\$1870	
WIP 6/554 13 Nov 1888	John D. Duliel	John W. Hoover et ux	House & lot, part of "Hoover's Home"	\$1400	
P. 163 12509 1513/658 12 Sept 88	09 Wolfsville Rd. George C. & Judith V. Haine	Milton W. & Cathene I. Haine	"... improvements thereon being known as Asa Stottlemeyer Store."	\$80,000	
862/496 4 Nov 71	Milton W. & Cathene I. Haine	Gaither E. Stottlemeyer & Elaine I. Masso pers. reps. of estate of Asa P. Stottlemeyer	3/4 A.		
372/290 23 Oct 29	Asa P. & Edna B. Stottlemeyer	Walter E. & Laodie M. Kefauver			

LIBER/FOL.	GRANTEE	GRANTOR	ORIGINAL TRACTS	COST	DATE
799/219 P. 163 12509 370/477 17 Jun 29	Wolfsville Rd. (cont.) Walter E. Kefauyer et ux	Jacob D. Wolfe			
P. 162 12406 1019/232 24 May 77	Stottlemeyer Rd. Gary James & Laura Palucia Masser	Frank Warrenfelty	P. 1: 50'x100' 438/547 P. 2: 70'x200' 428/276		
P. 1: (blot) 438/547 29 May 43	possibly bldg. demolished later Frank Warrenfelty	Walter L. Stottlemeyer, Claude V. Stottlemeyer, Claude C. Lewis, trustee of South Mtn. Lodge, 125	50'x100' "Abbleingtons Cabin"	#100	
368/380 18 Dec 28	South Mtn. Lodge I 00F Luther M. Wise et al, trustees	Catoctin Hall Co., Luther Elmer C. Brandenburg, appointed to acknowledge deed		#250	
316/63 12 Jun 15	Catoctin Hall Co.	Jacob D. Wolfe	5000 sq. ft.	#250	
CM 8/639 19 Jun 1872	Jacob D. Wolfe & Elias M. Beebe	Samuel Wolfe & ux	"Abbleingtons Cabin" "Egypt"	#3,000	
	Samuel Wolfe	Jacob Wolfe Sr., Last Will & Test			
P. 2: 428/276 10 Apr 41	Frank Warrenfelty	Minnie R. Harshman widow & Zecretia B. Brandenburg, widow		#500	

LIBER/FO

GRANTEE

GRANTOR

ORIGINAL TRACTS

COST

DATE

~~999/277~~

P. 162 12406 Stottlemeyer Rd. (cont.)

P. 2 (cont)
409/146
23 Aug 37
Minnie R. Haushman
(Daughter of Lucretia)

Lucretia B. Brandenberg

"Abentons Cabin" #500
STH 278/66

HWB 298/433
23 Nov-10

Lucretia B. Brandenberg

Annie S. Smith

"Abentons Cabin" #1100

2 Apr 08

Annie S. Smith

Amanda C. Dubell &
George W. Bittle, exec. of Tyson Dubell, dec.

STH 278/66
6 May 06

Tyson Dubell

Charles H. Kretzinger
et ux

"Abentons Cabin" #975
200' X 70'
14,000 sq. ft.

DHH 17/33
9 Mar 03

Charles H. Kretzinger

Alberta Recher

"Abentons Cabin" #825
(sic)
200' X 70'

WIP 9/408
24 Jul 1889

Alberta Recher

Fredrick Leitheman
et ux

"Abentons Cabin" #1,000
200' X 70'

P. 160 12408 Stottlemeyer Rd.

514/262
26 Mar 53
Thomas Kline
et ux
& Eleanor M. Kline

Milton A. & Louisa
Pryor

"Abentons Cabin"

512/286
30 Jan 53

Milton A. Pryor
et ux

James S. Stone, trustee

"Abentons Cabin" #3,050

354/321
14 Nov. 23

Rooklyn W. & Elsie
V. Pryor

Simon P. Escard et
ux

"Abentons Cabin" #2000

F-4-56

LIBER/FO	GRANTEE	GRANTOR	ORIGINAL TRACTS	COST	DATE
799/279 P. 160 12408	Stattlemyer Rd (cont.)	Jefferson M. Wolfe & Susan R. Wolfe	"Abenton's Cabin"	\$1,000	
331/265 31 Mar 20	Simon P. & Mollie M. Eccard, Jr.	Emory L. Calienty, assignee of mortgage Equity # 9206, Flood, Gauer ... Bank vs. Mable H. Wolfe		\$1,050	
STH 280/442 30 Oct 07	Wade H. & Eva S. Wolfe	Alvey G. & H. Bertha Smith	"Abenton's Cabin" 45' x 200' 1124 sq. yds. alley Row	\$1135	
STH 280/1 29 Mar 07	Alvey G. Smith & Evs	Josiah F. & Ellen S. Smith	45' x "Abenton's Cabin" alley Row	\$800	
DHH 3/552 23 Mar 1899	Josiah F. Smith	Susan C. & Lewis Lamar	"Abenton's Cabin" alley Row & privilege of placing gate at entr. to alley	\$800	
TG 6/601 26 Jan 1877	Lewis Lamar	John & Sarah E. Shuff (no earlier refs)	"Abenton's Cabin"	\$640	
P. 158 12416	Stattlemyer Rd	Cecil B. & Faith K. Pryor	20., 2 P. adjoining		
595/385 3 Feb 58	Donald S. & Harriet D. Pryor	Frances R. Pryor widow	P. 1: 411/39 P. 2: 466/96 13 pg. perches		

F-4-56

LIBER/FO	GRANTEE	GRANTOR	ORIGINAL TRACTS	COST	DATE
797/218 P. 158 12416 411/39 10 Dec 37	Stottlenyer Rd (cont.) Stanley D. & Frances R. Pryor	Dra E. & Orpha U. Pryor	"Hoover's Home" 2 a.	\$1,400	
402/145 21 May 36	Dra E. Pryor et ux	Stanley S. Wise & E. S. Howe, execs of last will of Luther M. Wise			
HWB 312/418 26 Sept 14 6 Oct 15	Luther M. Wise	Trenton C. Schroyer & Lola E. Schroyer	"Hoover's Home"	\$3000	
STH 276/421 20 Oct 06	Trenton C. Schroyer	Jonathan D. English			
DHH 13/139 2 Aug 01 (1)	Jonathan D. English	Elmer C. Brandenburg	1 a.	\$52.50	
DHH 11/29 14 Mar 01 (2)	Jonathan D. English	Trenton Schroyer	"Hoover's Home" 252 sq. perches	\$2300	
JIS 5/49 29 Mar 1893 (1)	Elmer C. Branden burg	Samuel Hoover	"Hoover's Home" 30 1/4 a.	\$1,512.50	
DHH 1/94 31 Dec 1897 (2)	Trenton Schroyer	Samuel L. Heller & Margaret E. Heller		\$2300	

LIBER/FO.	GRANTEE	GRANTOR	ORIGINAL TRACTS	COST	DATE
299/277 P. 158 12416 CM 8/445 8 Apr 1872	Stattlemyer Rd. (cont.) Hezekiah Harp & Mary S Harp	Hezekiah Harp & Mary S Harp	"Hoover's Home" 2 parcels 120 sq. perches & 150 sq. perches	\$2675	
CM 6/119 18 May 1870	Hezekiah Harp	Gideon Bussard & Sophia Bussard no earlier refs	"Hoover's Home" 3 roads 30 ft.	\$3000	
P. 159 12412 823/35 8 Apr 70	Stattlemyer Rd. Roy M. & Inez L. Pryor	Faith K. & Francis L. Coachman	3 1/2 sq. perches		
566/350 13 Oct 55	Cecil B. & Faith K. Pryor (Cecil died; Faith remarried Francis Coachman)	Wilmer C. & Victoria M. Pouwick			
504/273 23 Feb 52	Wilmer C. & Victoria M. Pouwick	Cecil B. & Faith K. Pryor			
481/104 13 Aug 49	Cecil B. & Faith K. Pryor	Richard A. & Gladys R. Martin	1 A. 16 sq. perches		
423/128 19 Feb 40	Richard A. & Gladys R. Martin	Ray M. & Mabel B. Kline		\$1,200	
416/549 1 Apr 37	Ray M. & Mabel B. Kline	Charles M. & Susie O. Kline	1 A. 16 sq. perches	\$600	


LIBER/FO.	GRANTEE	GRANTOR	ORIGINAL TRACTS	COST	DATE
P. 159 P. 159 12412	Stottlenger Rd. (cont.)			\$1870	
362/111 3 Mar 25	Charles M. & Rosa V. Kline (Rosa died; Charles remarried suicid.)	Charles E. Hoogbe, trustee Equity 11062	1 A. 16 sq. p.		
WIP 6/554 13 Nov 1888	John D. Dabel (Dable)	John W. Hoover	"a house & lot w/ improvements "Hoover's Home" 1 A. 16 sq. p.	\$1400	
CM 8/437 6 May 1872	John W. Hoover	Daniel Biser & Rose Ann Biser	109 sq. p.	\$2000	
3 Apr 1872	Daniel Biser	C. V. S. Leug & John E. R. Wood, assignees of Elias C. Dusing			
DSB 1/355 23 Feb 1867	Elias B. Dusing	John H. Mangans & Anne M. Mangans (no earlier refs)	109 sq. p.	\$230	
P. 223 948/557 17 Jun 74	Milton W. & Cath- erine I. Harne	Stadys, A. & Harry S. Blickenstaff	S.S. of Stottlenger Rd.		
P. 19 799/538 17 Mar 69	Wolfsville Rd. Milton W. & Catherine I. Harne	Albert S. Harshman, et al, heirs & spouses of Charles M. Harshman	47.39 A.		
401/177 12 Dec 35	Charles W. & Laura E. Harshman	W. Ivan & Letha E. Harshman	47.		

LIBER/FOL. 10	GRANTEE	GRANTOR	ORIGINAL TRACTS	COST	DATE
P. 19 388/96 29 Jun 32	Wolfsville Rd (cont) Mr. Ivan & Letha E. Harshman (son of Wm.)	Wm. E. Harshman, widower	4 parcels 1. 316/571, 29 Apr 16 2. 274/125, 10 Mar 06 3. 282/457, 20 Oct 06 4. DHH 17/208, 11 Apr 03		
DHH 17/208 11 Apr 03 (4)	Wm. E. & Margriet E. Harshman	Lawson P. & Eva-Ann E. Harshman	32 a. "Hoover's Home"	\$2700	
JLJ 5/746 31 Mar 1890	Lawson P. Harshman	Catherine A. M. Bruner	32 a.	\$2700	
WIP 9/167 6 Apr 1889	Catherine A. M. Bruner	John E. Phleege & Amanda C. Phleege	32 a.	\$3075	
WIP 1/497 14 Apr 1886	John E. Phleege	Elias R. Stottlenger & Anna C. Stottlenger (no earlier refs)	33 a.	\$2500	
P. 167 125 1030/250 16 Sept 77	11 Wolfsville Rd. Serg J. Lewis & Cynthia K. Crowl	Eugene E. & Janice C. Delauter	160' X 257'		
781/422 30 Mar 68	Eugene E. Delauter et ux	Robert L. Blickenstaff & Mary V. Blickenstaff			
647/611 15 Dec 60	Robert L. Blickenstaff et ux	Francis C. Harshman & Catherine V. Harshman			
543/211 1 Mar 55	Francis C. Harshman et ux	Russell D. Harshman widower	160' X 257'		

F-4-56

LIBER/FOLIO	GRANTEE	GRANTOR	ORIGINAL TRACTS	COST	DATE
P. 167 12511	Wolfsville Rd. (cont.)				
481/167 3 Sept 49	Russell D. & Ruth E. Harshman	Emory Frey			
426/43 14 Nov 40	Emory Frey et ux	Gail P. Stottlenyer, ex. of last will & est. of George R. Stottlenyer	160' x 257' 120' lot frontage conveyed to J. H. Mangum JLJ 16/175. 27 Apr 1897 105 p.	\$2250	
JLJ 3/6 25 Jul 1892	George R. Stottlenyer	Clara A. McCroby et al (formerly Clara A. Fausht)	120' lot frontage conveyed to J. H. Mangum "Abbeingtons Cabin mentions old stone springhouse 1A."	\$570	
WIP 9/381 16 Jul 1889	Mrs. Clara A. Fausht	Jacob D. Wolfe		\$1350	
WIP 9/381 16 Jul 1889	Jacob D. Wolfe	Jonathan A. Wolfe		\$1200	
Mill Book \$6C 1/245	Samuel Wolfe	Jacob Wolfe, Sr.			
J S 9/562 1819	Jacob Wolfe, Sr.	Jacob Protzman	11 1/4 A. no mention of town of Wolfsville		
P. 166 12517	Wolfsville Rd.				
603/549 20 Aug 58	Daniel B. Warrenfeltz	Charles E. Warrenfeltz et al, heirs of Margaret E. Warrenfeltz	120' x 235' 105 p.		
385/121 26 Jul 32	Margaret E. Warrenfeltz	Alynn E. Sensenbaur et ux, ex. of last will of John H. Mangum		\$1,575	

LIBER/FOL. J	GRANTEE	GRANTOR	ORIGINAL TRACTS	COST	DATE
P. 166 12517 JLJ 16/195 27 Apr 1897	Wolfswille Rd. John H. Mangans	George R. Stottlemeyer et ux			
P. 165 1252 609/77 11 Oct 58	Wolfswille Rd. Charles E. Warren- belly widower	Annie E. & Gerw. E. Stottlemeyer & Frank Warrenbelly, dec'd Daniel P. Warrenbelly, dec'd 1936	12,000 sq. ft. 200' x 60'		
329/368 10 Jan 20	Daniel P. Warrenbelly	Andrew G. & Emma E. Stephens	200' x 60'	\$2700	
316/424 19 Feb 16	Andrew G. & Emma E. Stephens	Jacob D. Wolfe	200' x 60'	\$225	
P. 181 12544 1231/958 23 Mar 84	Wolfswille Rd. Rolin K. & Theresa M. Haupt	Wm. Donald Shankle & Mary Alice Shankle	90.875 sq. perches		
843/300 12 Mar 71	Wm. Donald Shankle et ux	Leslie D. & Eva I. Morgan			
406/503 19 Feb 37	Leslie D. & Eva I. Morgan	Asa P. & Edna B. Stottlemeyer			
372/290 23 Oct 29	Asa P. & Edna B. Stottlemeyer	Walter E. & Sadie M. Kefauver	2nd Parcel, part of		

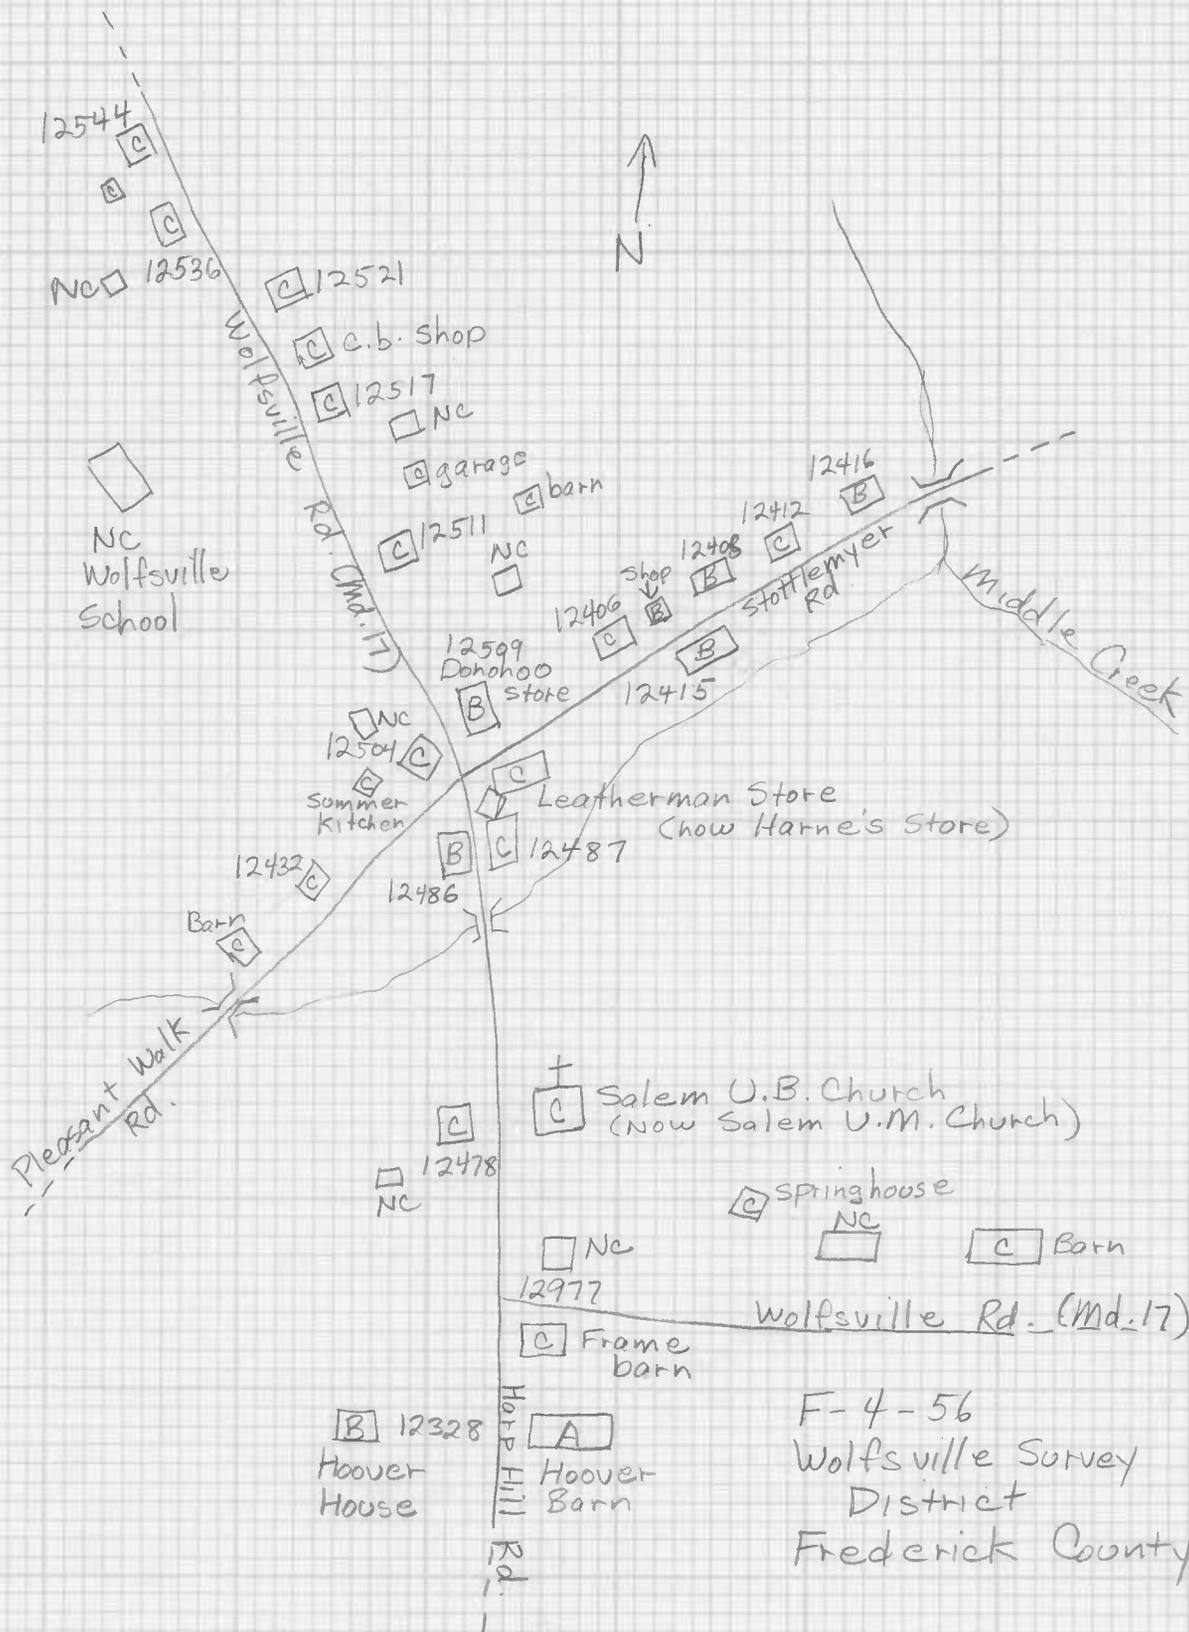

F-4-56
 Wolfsville Survey
 District
 Frederick County


Janet Davis
 April 27, 1992
 Not to Scale

Neigh-
 laid down by
 dwellings when
 Mills, &c.,
 abbreviations, viz:
 E—Episcopal,
 R—Reformed,
 M—Methodist
 F M H—


minary, F Sem—
 Wright Shop.
 S M—Saw Mill,
 and G S M or S

Ice, T Yd—Tan
 capitals.
 of roads, are

marked by short
 rally numbered.
 on the ground
 part, indicate the
 of Market and
 his point by the
 to Buckeystown
 Amitsburg, 21 1/2
 Mount Pleas-
 of Rocks, 13 1/2
 Wolfsville 16
 s, at the Pa.
 the stream, is 36

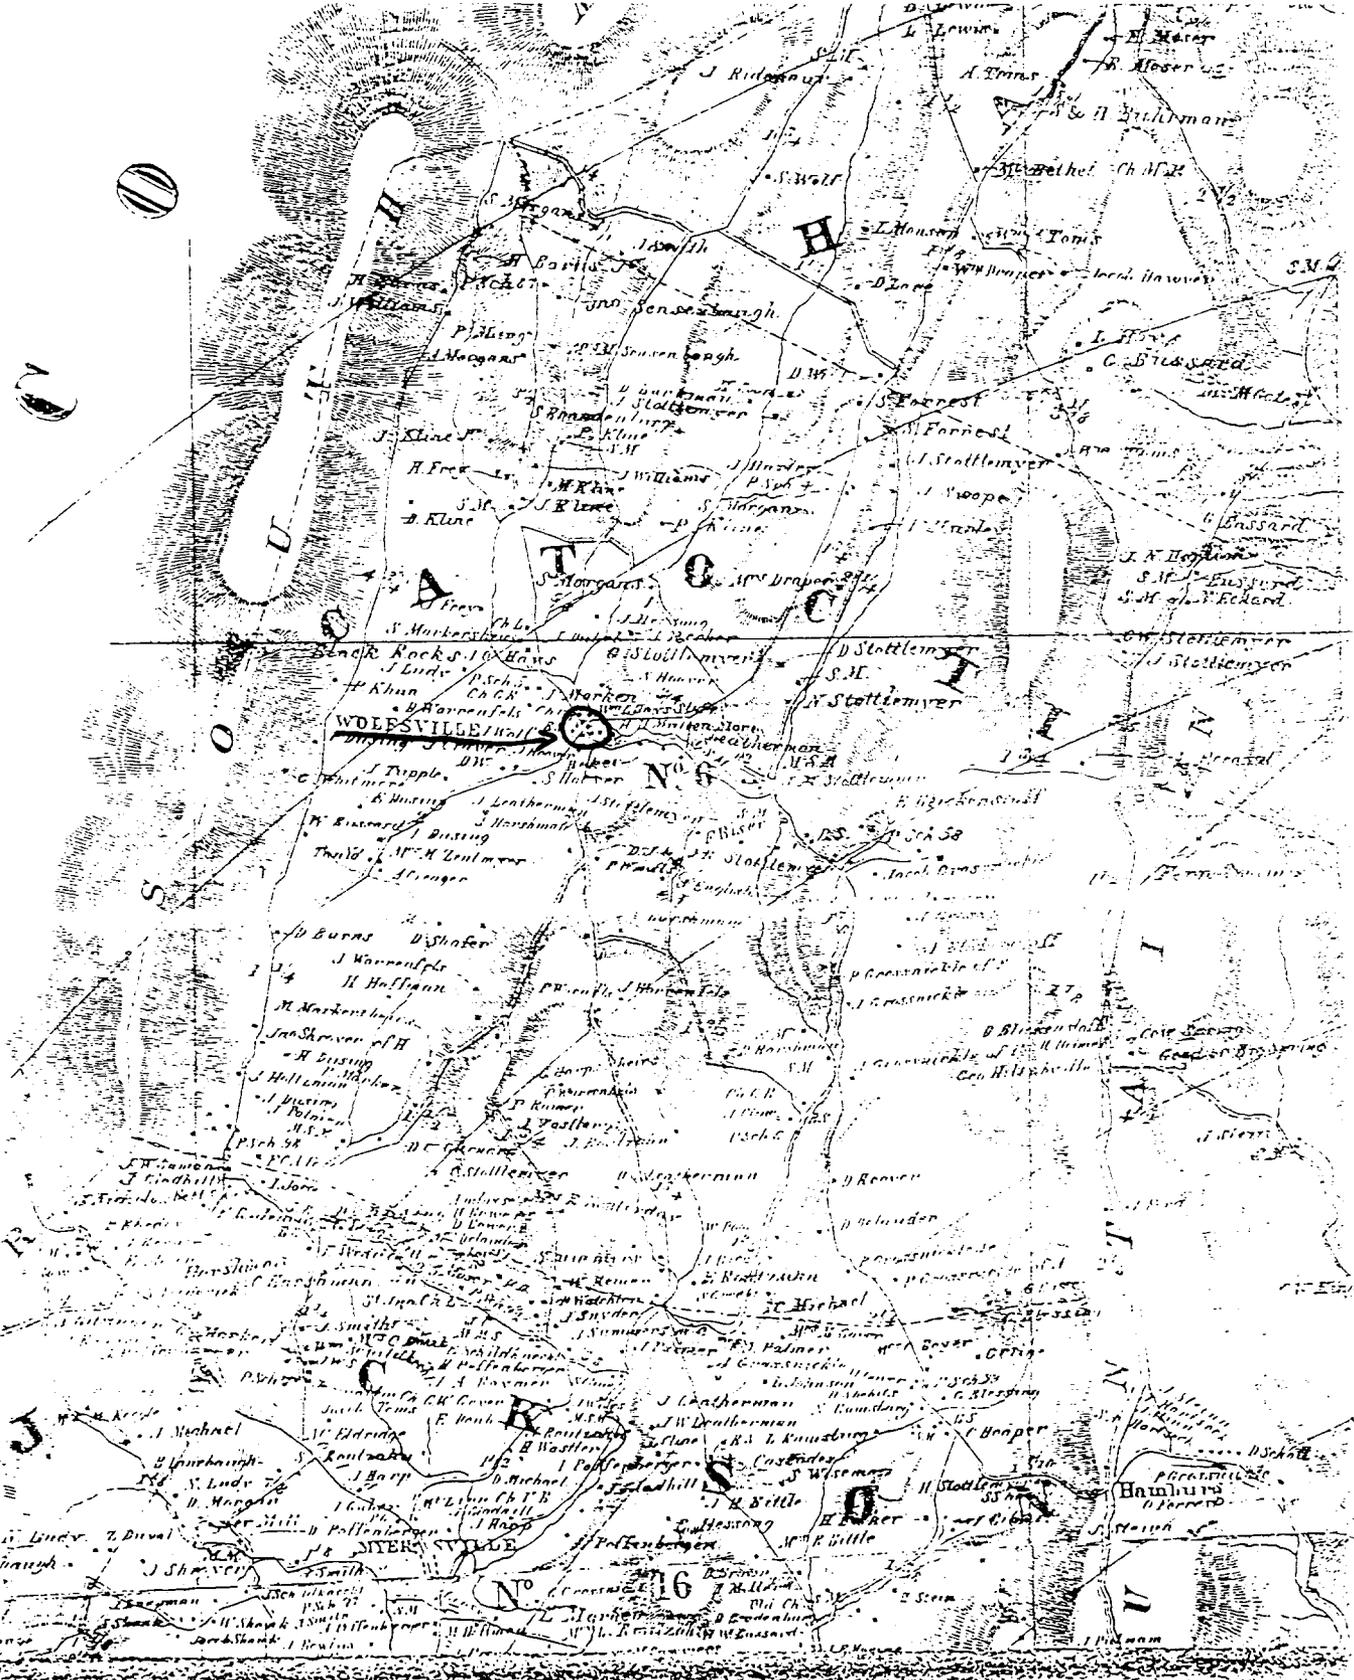

F-4-56
 Wolfsville Survey District
 Frederick County
 Isaac Bond, Map of Frederick
 County, 1858

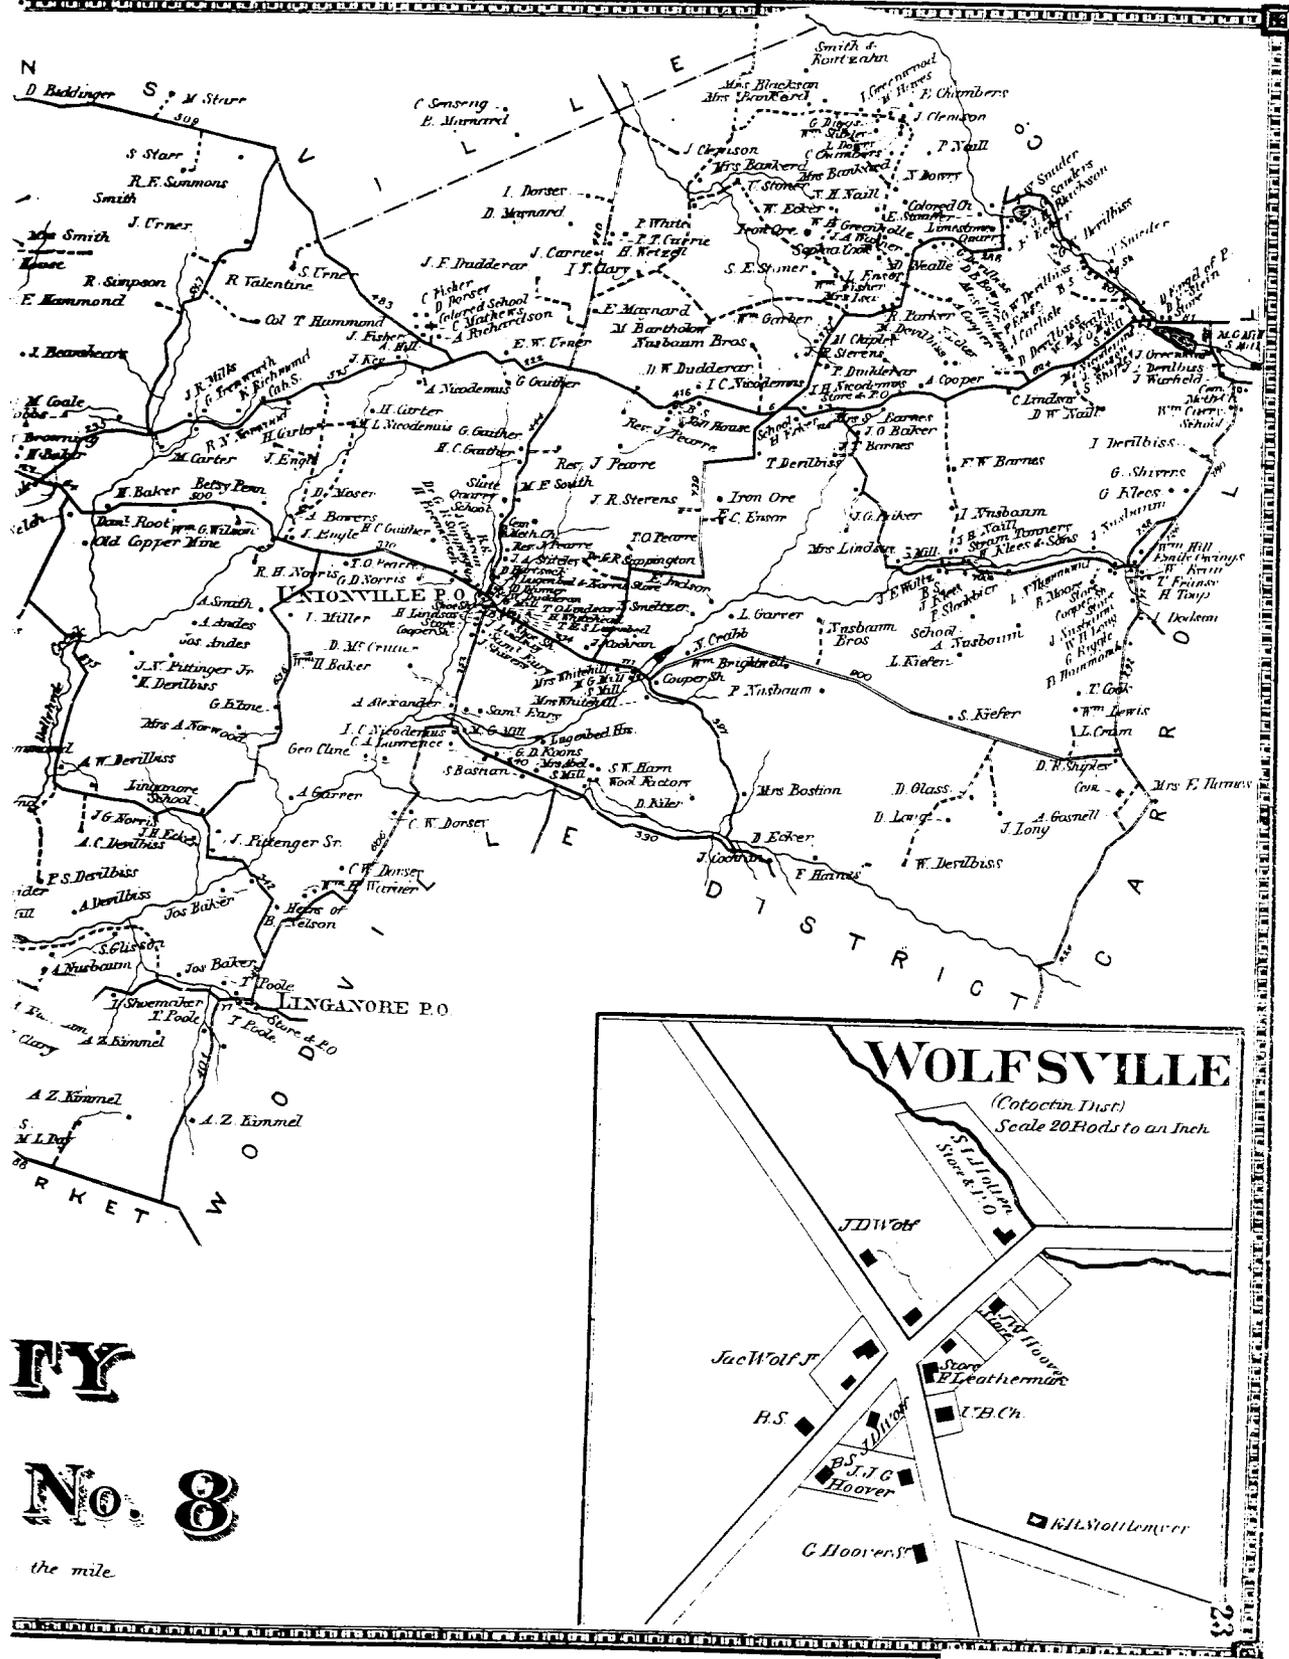


FY
No. 8
 the mile


F-4-56
 Wolfsville Survey District
 Frederick County
 C.O. Titus, Atlas of Frederick
 County, 1873.
 Village Plan

CAT OUT IN DIST. NO. 6

Scale 2 inches to the mile

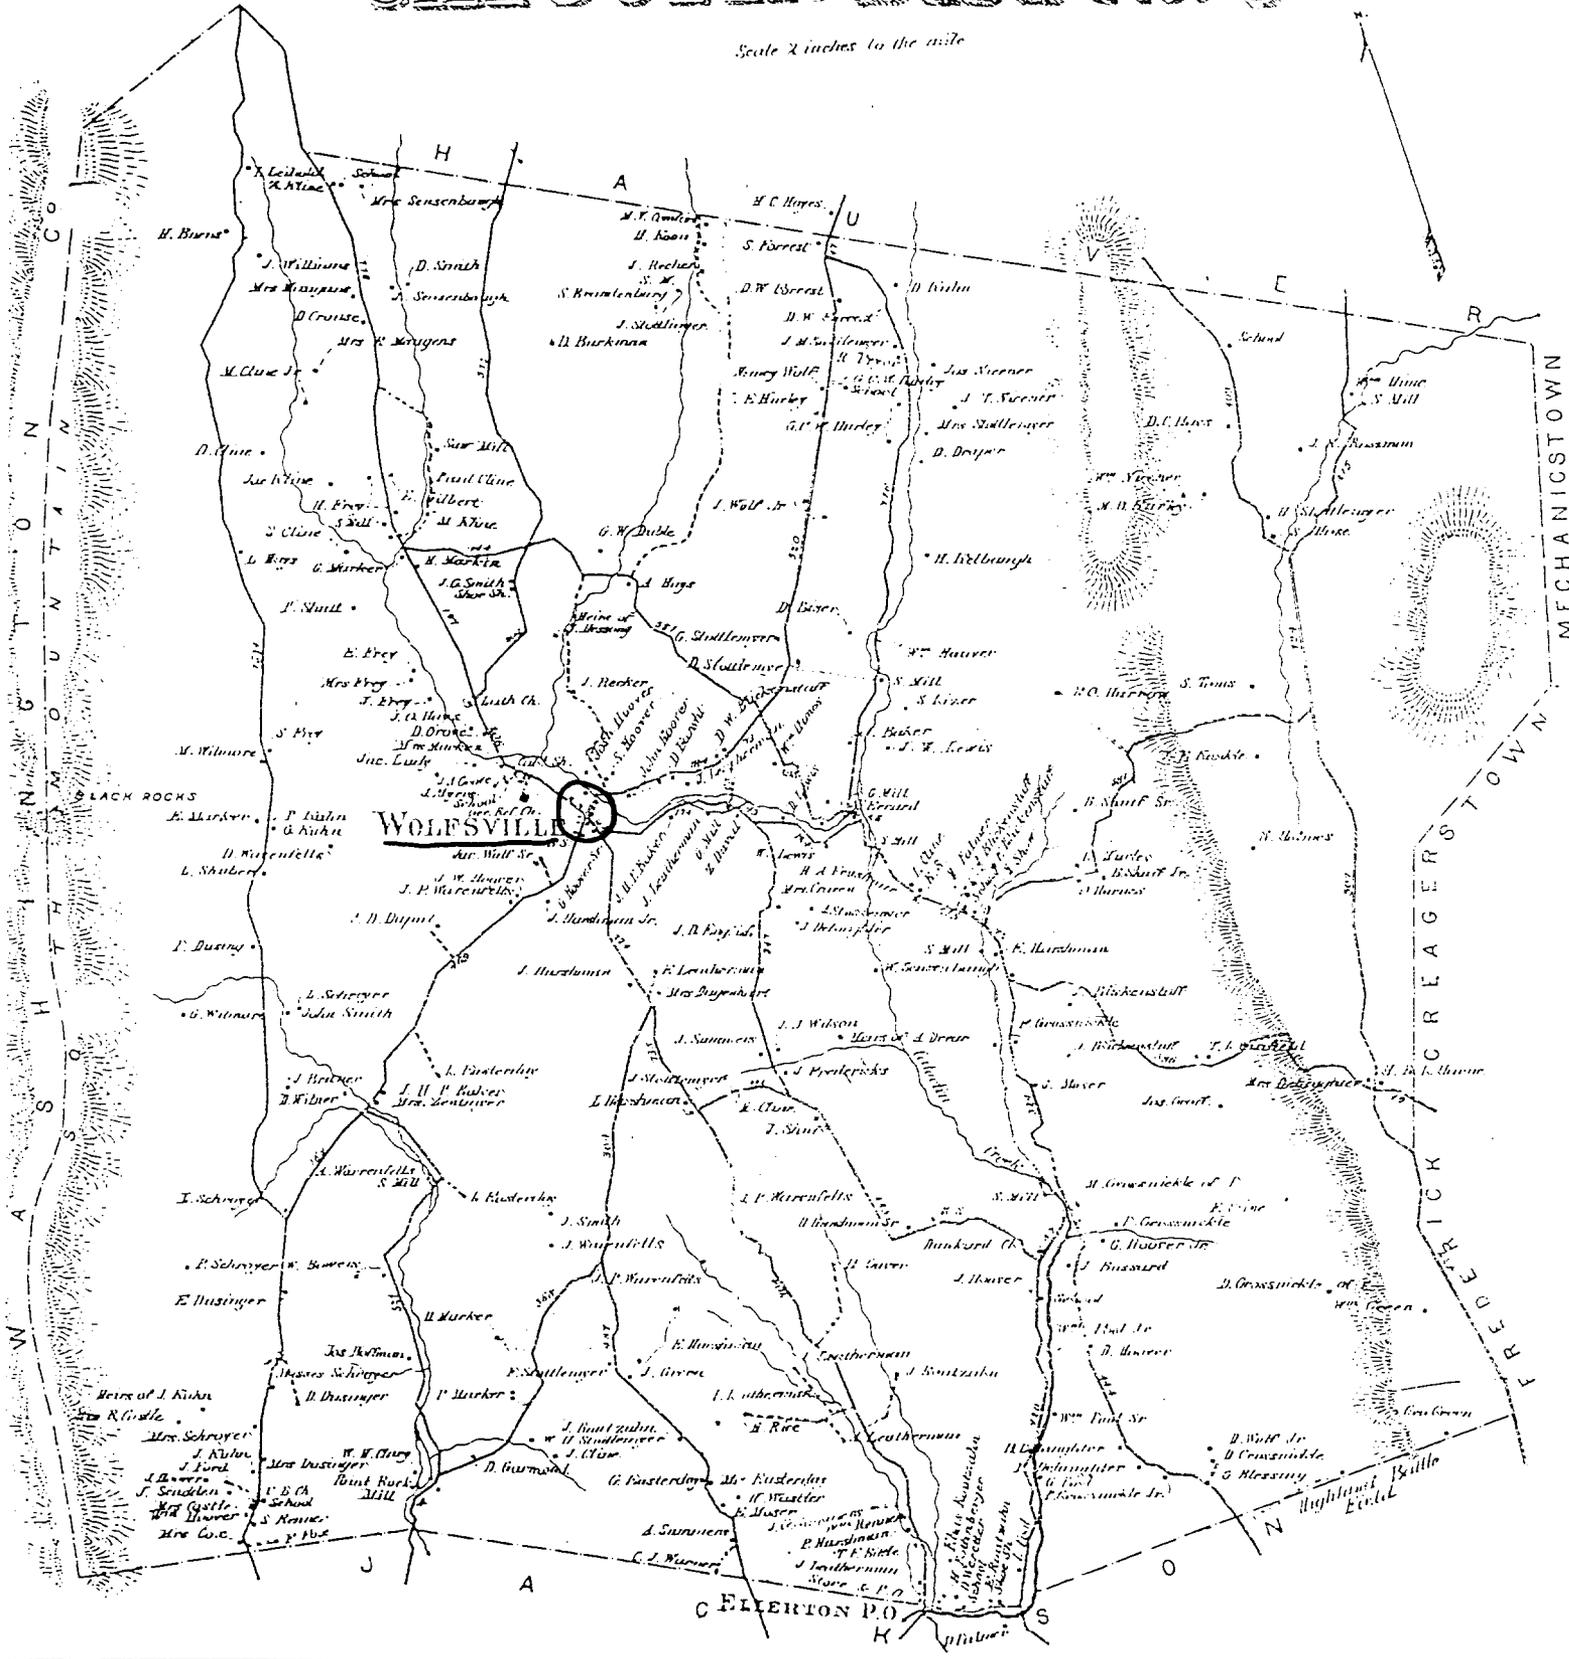

F-4-56
Wolfsville Survey District
Frederick County
C.O. Titus, Atlas of Frederick
County, 1873.

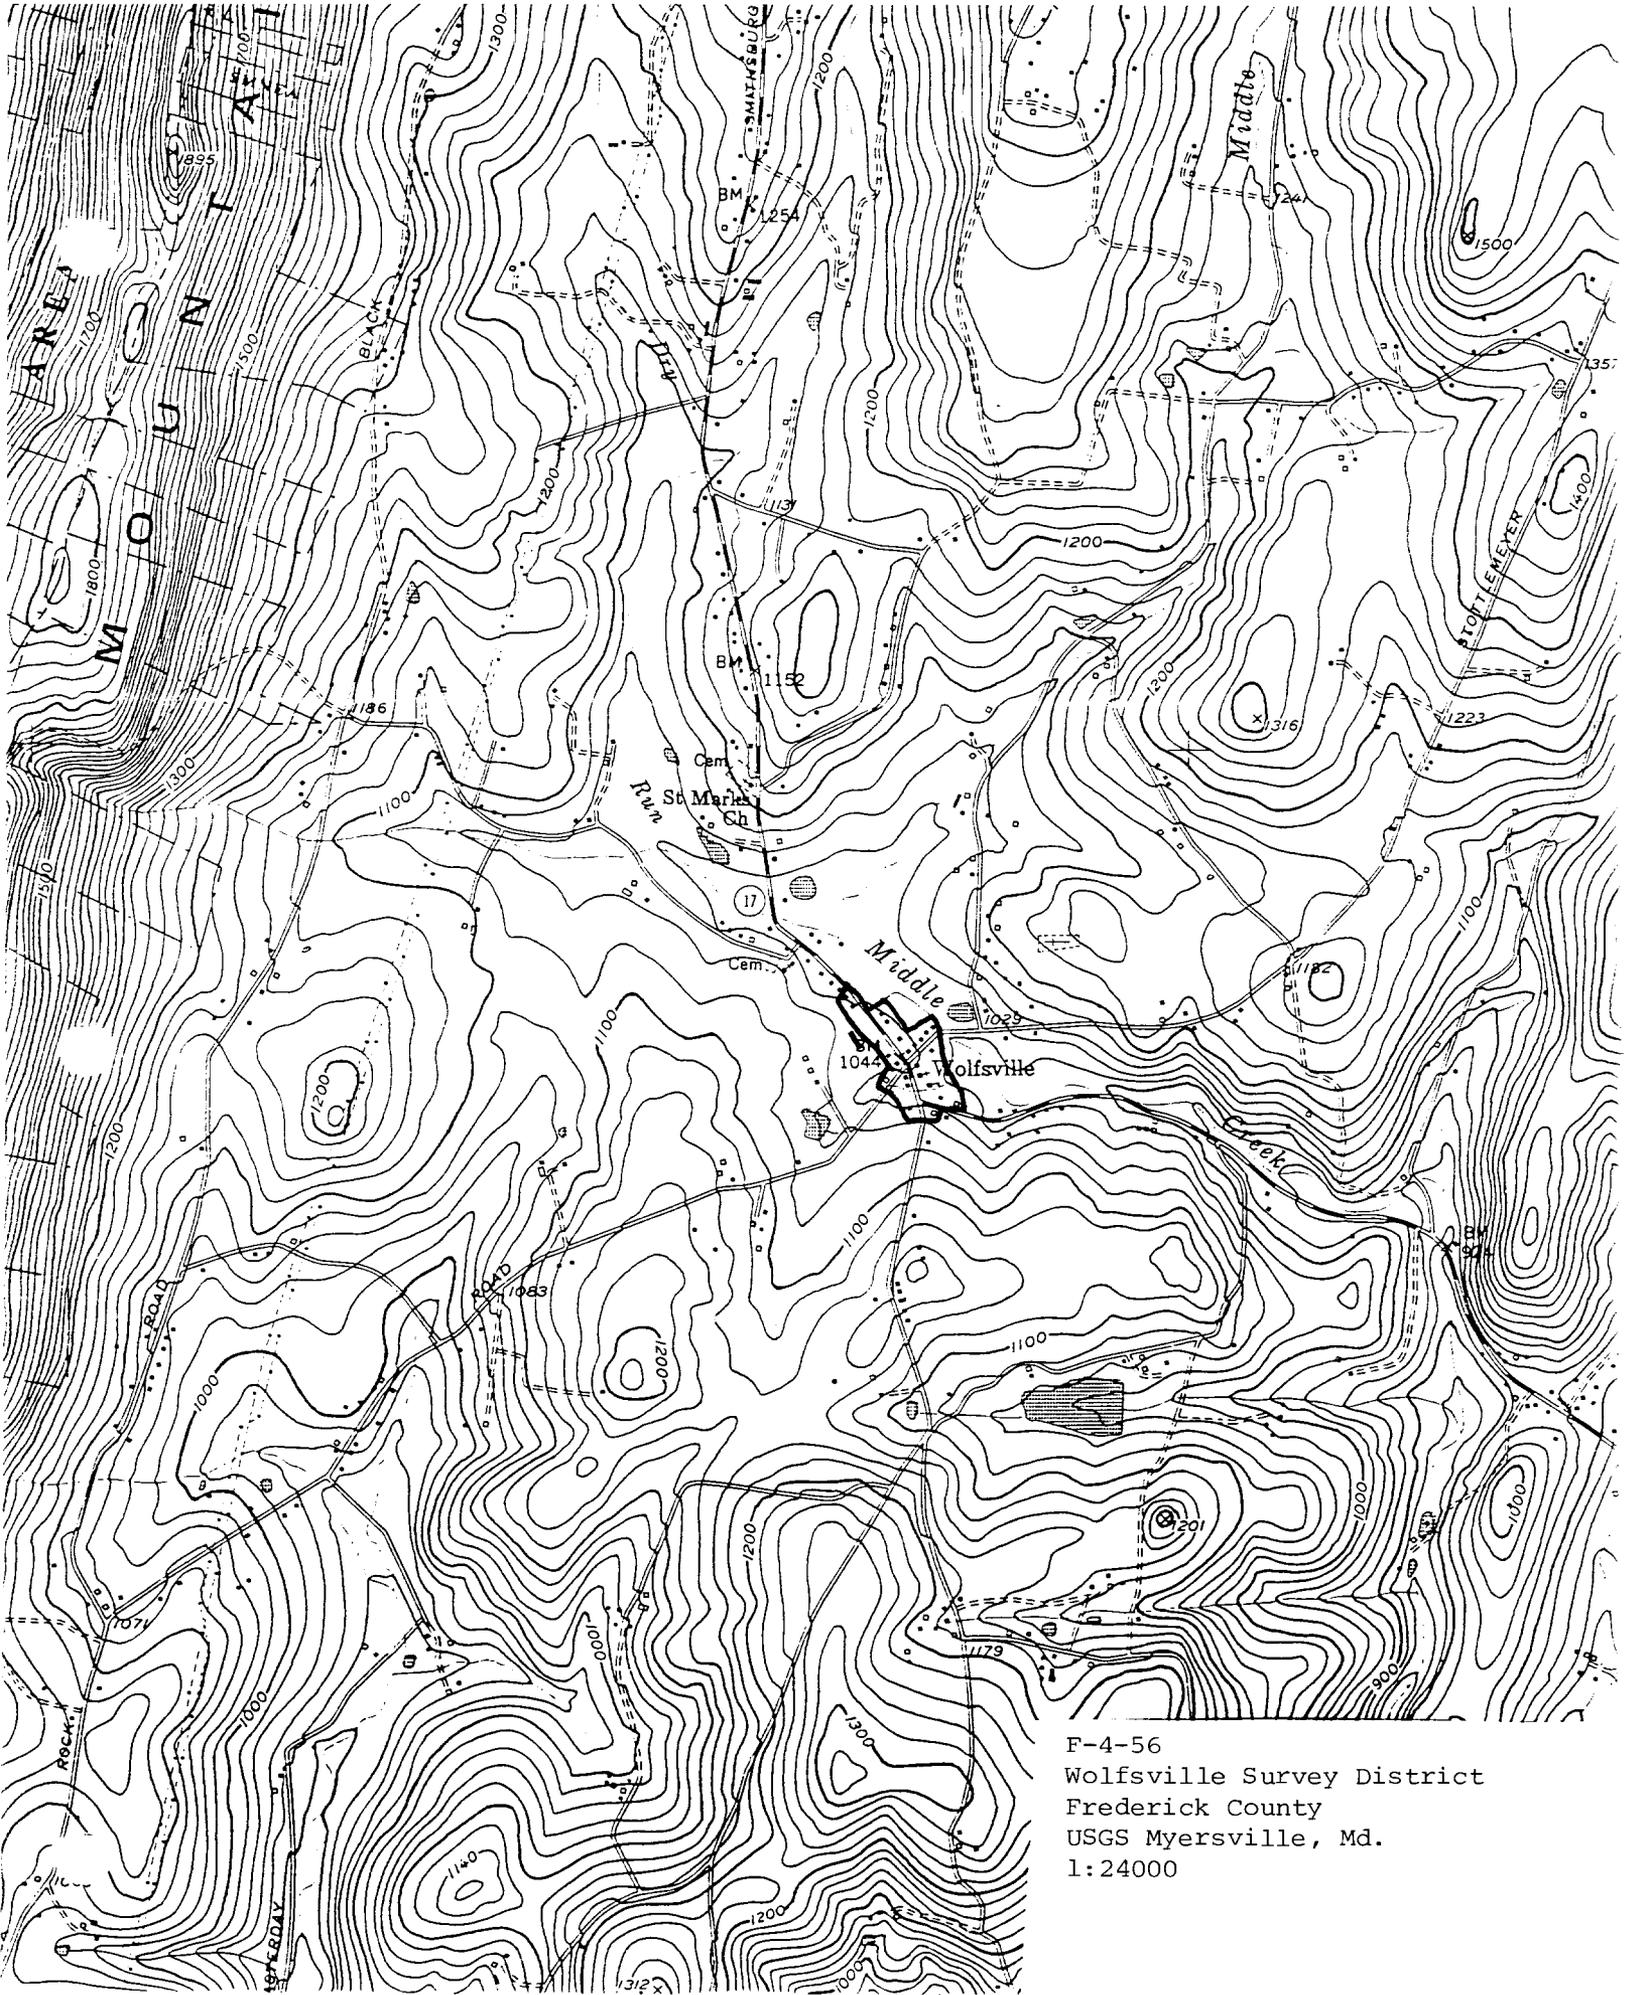

F-4-56
Wolfsville Survey District
Frederick County
USGS Myersville, Md.
1:24000



F-4-56

Woodsville Survey District

Frederick County

Photo: Janet Davis

April 1992

Neg. 100. Md. State Geologist, Inc.

View north on Harp Hill Rd. toward district

1/19



F. 4-52

Wolfsville Survey District

Frederick County

Photo: Janet Davis

April 1972

Neg. 15... Md. State Cr. 2000000, Md

View north on Main St. near "square"

2/3



F-4-56

Wolfsville Survey District
Frederick County

Photo: Janet Davis

April 1992

Neg. loc.: Md. State, Crownsville, Md.
Hoover House, north east corner view

3/19





F 4 56

Wellsville Survey District

Frederick County

Photo: Janet Davis

April 1982

Loc. 400 - Md. SHPO - townsville, Md

Height East, north elevation:

5/9



F. 4-53

Waltersville Survey District

Frederick County

Photo Janet Down

April 1952

Near Loc. 1114, Hwy. 1 near Waltersville, Md

Stottlemeyer Barn, 12403 Waltersville Rd.,

Southeast Corner View

6/19



F-4-30

Walden State Park District

Frederick County

Photo: James Lewis

April 1942

Neg loc: 115 SHPO, Crown Summit

Stoffel's house, southwest corner view

7/10



F. cl. 23

Wolfsville Survey District

Frederick County

Photo: Janet Davis

April 2002

Neq. loc. Md. SHPO, Crownsville, Md

12004 W. Iowville Rd. southeast corner view

8/19



F-4-52

Wolfsville Sw. sy. T. 151 50
Frederick County,

Photo: Janet Davis

April 1992

Reg. loc.: Md. SHPO, Crownsville, Md.

Leatherman Stone west elevation

9/14



F. 4 - 3

Wolfsville Survey District

Frederick County

Photo: Janet Davis

April 1972

Neg. loc.: Md. SHPO, Crownsville Md

Leatherman State, north elevation

10/14



F. 4. 56

Wolfsville Survey District

Frederick County

Photo: Janet Davis

April 1992

Neg. loc. Md. State College, Md.

Donoho Store, Southeast corner view

11/19



F. 4-33

Wolfsville Survey District

Frederick County

Photo: Janet Davis

April 1992

neg. loc.: Md. State, Crowsville, Md.

John W. Moore Above northwest corner view

12/10



E. d. 56

Waldsville Survey District

Frederick County

Photo: Janet Davis

April 1971

Nov. loc. Md. SHPC, Crownsville, Md

Stettinmyer Rd. north side, south elevation

12/19



F-4-56

Wolfsville Soil District

Frederick County

Photo: Janet Davis

April 1972

1.5 mi. loc. ind. S 1/2, Crownsville, Md

12.5 mi Wolfsville Rd., with barn, view from N.E.

12/19



F-0-56

Wolfsville Survey District

Frederick County

Photo: Janet Davis

April 1992

Non-loc. s. Mt. - APO, Crownsville, Md.

12511 Wolfsville Rd. W. + 3 locations

15/19



F-4-36

Wolfsville Survey District
Frederick County

Photo: Janet Davis

April 1992

Neq. 120. : N 1/2. E 1/2 : Crownsville, Md

12317 Wolfsville Rd west elevation

16/19



F-4-56

Wolfsville Survey District

Frederick County

Photo: Janet Davis

April 1992

Neq. loc.: Md. SHPO, Crownsville, Md

125.1 Wolfsville Rd. on N.C. map "1992" elevation

17/19



F. 4-56

Wolfsville Survey District
Frederick County

Photo: Janet Davis

April 1972

Near loc. 7 Md. State, Crownsville, Md

12336 Wolfsville Rd. east elevation

18/19



F-4-56

Wolfsville Survey District

Frederick County

Photo: Janet Davis

April 1992

Neg. 130 - Md. SHHC. "Wolfsville, Md

12524 Wolfsville Rd, east of intersection with

12524
12524