

MARYLAND HISTORICAL TRUST
NR-ELIGIBILITY REVIEW FORM

NR Eligible: yes ___
no ___

Property Name: St. Leonard's Polling House Inventory Number: CT -158

Address: West side of MD 765/St. Leonard Road City: St. Leonard Zip Code: 20685

County: Calvert USGS Topographic Map: Broomes Island

Owner: Board of Commissioners Calvert County

Tax Parcel Number: 61 Tax Map Number: Map 31 Tax Account ID Number: 01 128434

Streetscape Improvements to MD 765 Town Limits

Project: of St. Leonard Agency: State Highway Administration

Site visit by SHA Staff: ___no ___X yes Name: Becky Kermes Date: March 2001

Eligibility recommended ___X Eligibility **not** recommended ___

Criteria: ___X A ___ B ___X C ___ D Considerations: ___ A ___X B ___ C ___ D ___ E ___ F ___ G ___ None

Is the property located within a historic district? ___X no ___ yes Name of district: _____

Is district listed? ___no ___yes Determined eligible? ___no ___yes District Inventory Number: _____

Documentation on the property/district is presented in:

Description of Property and Eligibility Determination: *(Use continuation sheet if necessary and attach map and photo)*

The St. Leonard's Polling House currently is situated on the west side of MD 765, south of the intersection with Calvert Beach Road in a park setting.

Architecturally, it is a simple, square frame building, one story, with a front facing gable roof. The roof is clad with metal shingles. The front façade features two doors – one for entering and one for exiting after casting votes, facilitating the smooth flow of voters. There are several 6/6 double hung sash windows, one centered on the north façade, one centered on the south façade, and one centered on the west.

The Polling House is unique in its purpose, but further significant because there are no known extant polling houses of this nature in Maryland. The right to vote, and how we vote are obvious in importance to American history. The St. Leonard's Polling House illustrates one community's methodology of coordinating the votes on an Election Day. It also presents us with a message of the implied social importance of casting one's vote – a special structure was constructed just for that purpose.

MARYLAND HISTORICAL TRUST REVIEW	
Eligibility recommended ___X	Eligibility not recommended _____
Criteria: ___X A ___ B ___X C ___ D	Considerations: ___ A ___X B ___ C ___ D ___ E ___ F ___ G ___ None
Comments: _____	
<u>Andrew Lewis</u> Reviewer, Office of Preservation Services	<u>01/31/02</u> Date
<u>3 K...</u> Reviewer, NR program	<u>2/19/02</u> Date

MARYLAND HISTORICAL TRUST
NR-ELIBILITY REVIEW FORM


CT-158

Continuation Sheet No. 1

The St. Leonard's Polling House is considered eligible for inclusion in the National Register of Historic Places. The Maryland Inventory Form states that local citizens recall that the Polling House had been moved at least twice. However, given the rarity of the structure type, the Polling House meets the Criteria Considerations of a moved structure.

Prepared by: Becky Kermes

Date Prepared: March 2001

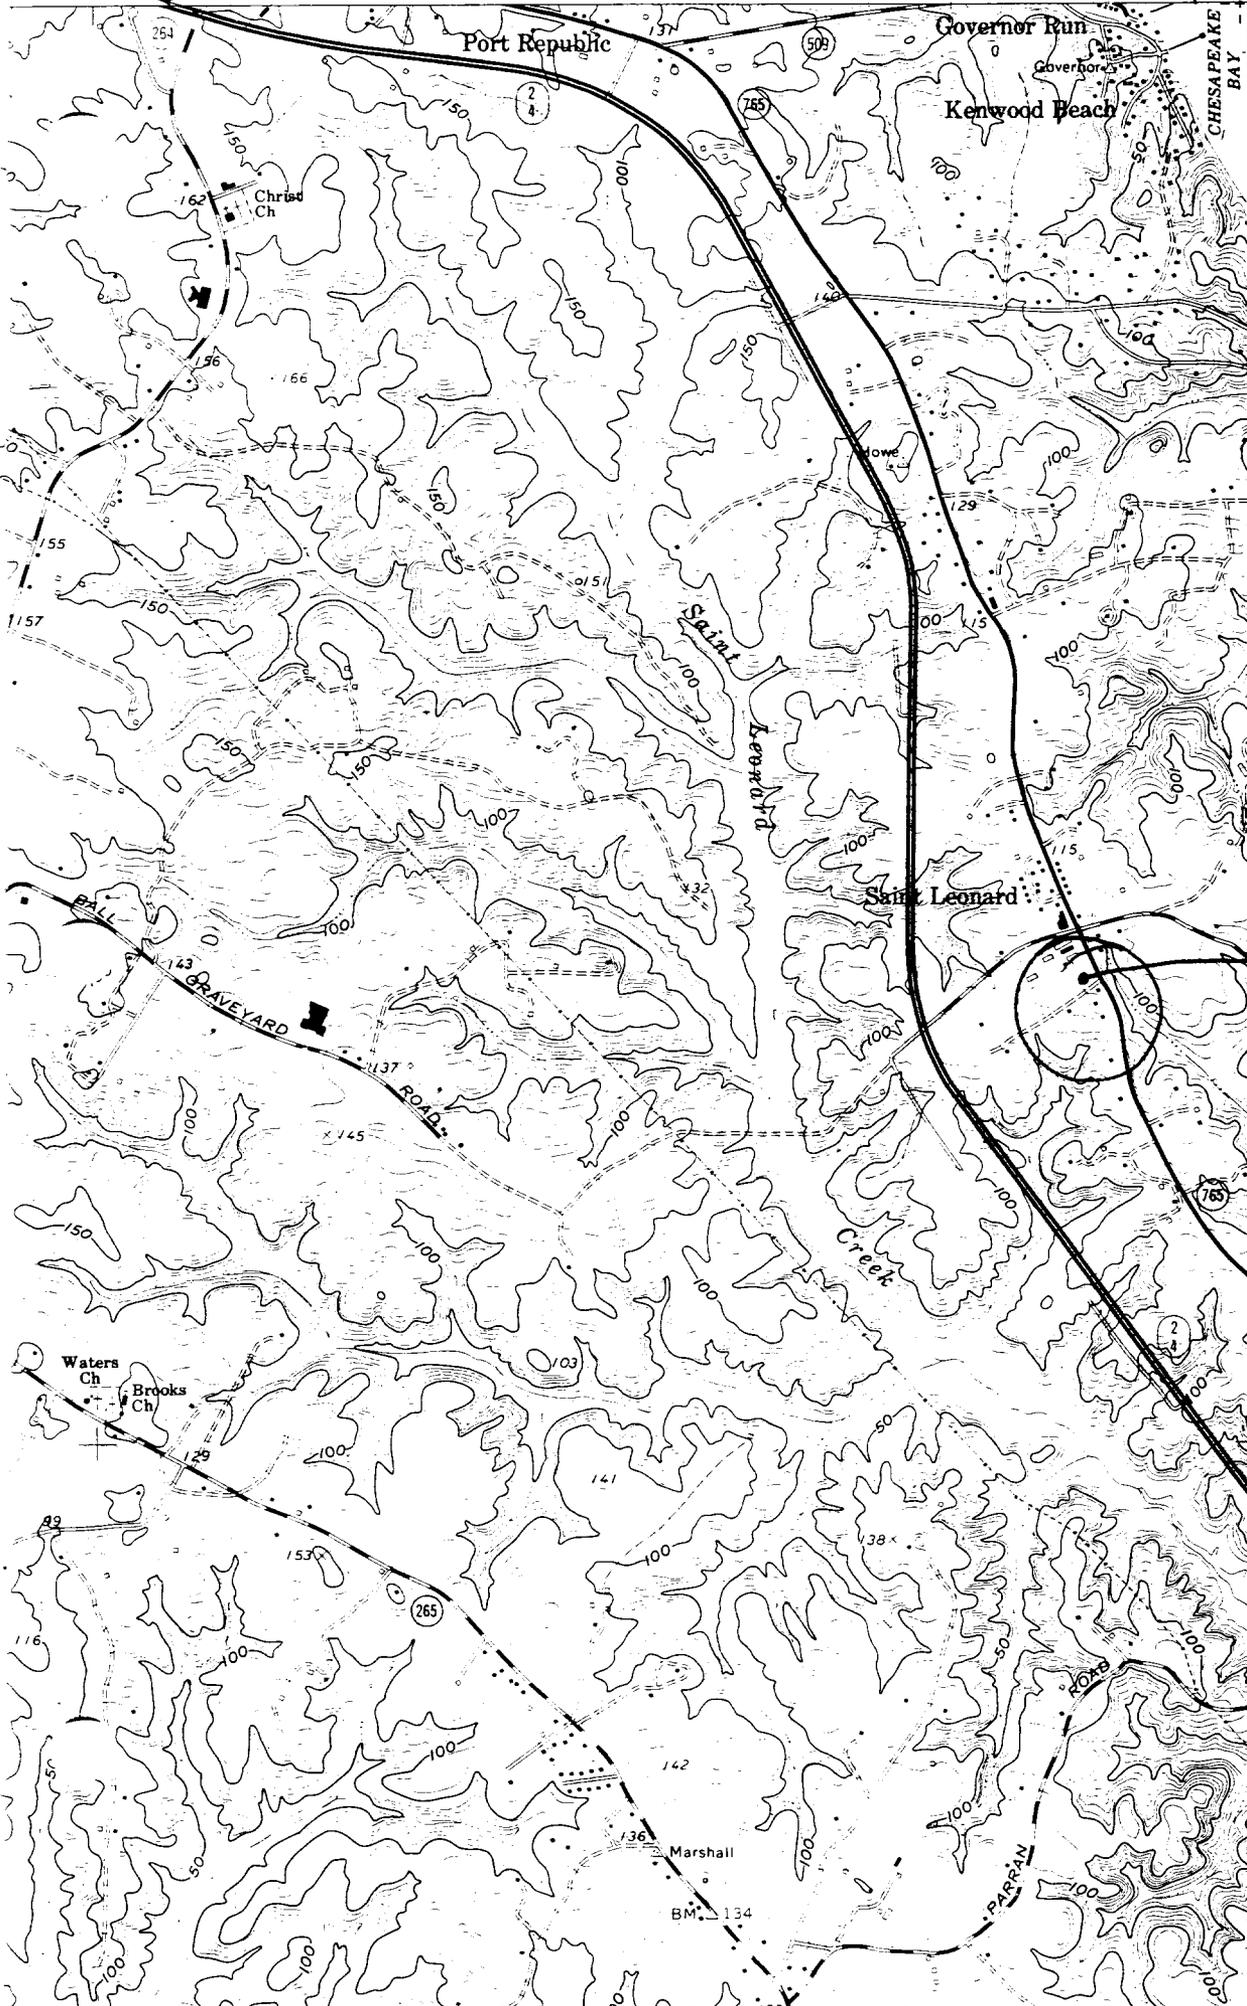

240 000
FEET

4261

4260

4259

4258

4257

4256

4255

4254

4253

4252

4251

4250

4249

4248

4247

4246

CT-158
 St. Leonard's
 Polling House
 St. Leonard's
 Calvert County
 Browns Island
 Quad

LUSSBY 4.5 MI.
 SOLOMONS 12 MI.

27' 30"

1.2 MI. TO MD. 785
 0.7 MI. TO MD. 2&4

4256

4256

CT-158



1880
WILLIAM
WELLS
WELLS

MEHP-01-158
St Leonard Polling House
Advert County, MD
Berkey & Sons. Antiquarian
Newhouse & MD. SHPO

View of the front (east) and side
(south) facade of the polling house.
Note tree in far corner of photo -
1 of 5



ST. LEONARD'S
POLLING
HOUSE
BIRCA, IOWA

MHP - CT - 153

St. Leonard's Riding House

Calvert County, MD

Becky Keimig, photo rapher

Negative & MD, SAPO

EAST

View of ~~the~~ ~~riding house~~ ~~from~~ ~~the~~ ~~west~~ ~~side~~ ~~of~~ ~~the~~ ~~riding house~~ ~~looking~~ ~~west~~
~~from the west side of the riding house.~~

2 of 5



MLHP # 67 158

St. Leonard's Pulling House

College Landing, MD 2

Betty Kerms. Photographer

Negative no. MD 54PO

View of the West (r.c.) facade of
the Pulling House, looking east toward
MD 765.



MIHP - CT-158

St. Leon -ed Pulling Horse

Covent (cont'd) 217

Bridg. Kermes, Photographer

Negative a MD SHPO

View of the south facade - looking
north towards the center of town.

3 of 5



MLHP # CT 1518

St Leonard Hallway House

Calvert County, MD

Becky Keenan photograph

Negative # ML 3490

View of the north (side) facade - Looking
south toward Solomon's.

CAPSULE SUMMARY
CT-158
St. Leonard Polling House
5095 St. Leonard Road
St. Leonard, Calvert County
1926
Public

The St. Leonard Polling House, built in 1926, is a rare and intact example of an early 20th century polling house. Constructed by Norman Gray, the St. Leonard Polling House originally stood on land purchased by the County Commissioners of Calvert County from Nellie Taylor in 1926. In 1930, Harry B. and Grace Trueman conveyed a one-acre tract of land to the County Commissioners of Calvert County, to which the polling house was subsequently moved. In 1993, the building was moved once again to a small county-owned plot of land at 5095 St. Leonard Road in St. Leonard, Calvert County, Maryland. Its one-room plan with two entries on the front-gabled façade typifies the form and design of the polling houses that were found throughout Calvert County. During the late 19th and early 20th centuries, the polling house served both a political and social function. It provided an essential democratic function for residents as a place to vote and a significant social function as an opportunity for interaction between widely dispersed county residents.

The St. Leonard Polling House is a modest, vernacular building standing one story in height and two bays in width. It is set on a stretcher-bond brick foundation that dates to 1993, when the building was moved to its current location. Detailing on the wood-frame building includes weatherboard cladding, square-edged cornerboards, an interior-end brick chimney with a corbeled cap, and a front-gabled roof. The roof is clad in pressed metal shingles and features shallow overhanging eaves. The polling house features a one-room plan with beaded paneling on the walls and ceiling and wood boards on the floor. The "Garden of Remembrance" lies to the rear of the building, with a winding path, benches, and flowerbeds.

Maryland Historical Trust

Maryland Inventory of Historic Properties Form

Inventory No. CT-158

1. Name of Property (indicate preferred name)

historic St. Leonard Polling House

other

2. Location

street and number 5095 St. Leonard Road not for publication

city, town St. Leonard vicinity

county Calvert

3. Owner of Property (give names and mailing addresses of all owners)

name Board of Commissioners, Calvert County

street and number 175 Main Street telephone 410/535-1600

city, town Prince Frederic state MD zip code 20678-3337

4. Location of Legal Description

courthouse, registry of deeds, etc. Calvert County Courthouse tax map and parcel: M31, P61

city, town Prince Frederic liber AAH folio 486

5. Primary Location of Additional Data

- Contributing Resource in National Register District
- Contributing Resource in Local Historic District
- Determined Eligible for the National Register/Maryland Register
- Determined Ineligible for the National Register/Maryland Register
- Recorded by HABS/HAER
- Historic Structure Report or Research Report
- Other

6. Classification

Category	Ownership	Current Function		Resource Count	
				Contributing	Noncontributing
<input type="checkbox"/> district	<input checked="" type="checkbox"/> public	<input type="checkbox"/> agriculture	<input type="checkbox"/> landscape	<input type="checkbox"/> 1	<input type="checkbox"/> buildings
<input checked="" type="checkbox"/> building(s)	<input type="checkbox"/> private	<input type="checkbox"/> commerce/trade	<input checked="" type="checkbox"/> recreation/culture	<input type="checkbox"/>	<input type="checkbox"/> sites
<input type="checkbox"/> structure	<input type="checkbox"/> both	<input type="checkbox"/> defense	<input type="checkbox"/> religion	<input type="checkbox"/>	<input type="checkbox"/> structures
<input type="checkbox"/> site		<input type="checkbox"/> domestic	<input type="checkbox"/> social	<input type="checkbox"/>	<input type="checkbox"/> objects
<input type="checkbox"/> object		<input type="checkbox"/> education	<input type="checkbox"/> transportation	<input type="checkbox"/>	<input type="checkbox"/> Total
		<input type="checkbox"/> funerary	<input type="checkbox"/> work in progress	<input type="checkbox"/> 1	<input type="checkbox"/> 0
		<input type="checkbox"/> government	<input type="checkbox"/> unknown		
		<input type="checkbox"/> health care	<input type="checkbox"/> vacant/not in use		
		<input type="checkbox"/> industry	<input type="checkbox"/> other:		
				Number of Contributing Resources previously listed in the Inventory	
				1	

7. Description

Inventory No. CT-158

Condition

<input type="checkbox"/> excellent	<input type="checkbox"/> deteriorated
<input checked="" type="checkbox"/> good	<input type="checkbox"/> ruins
<input type="checkbox"/> fair	<input type="checkbox"/> altered

Prepare both a one paragraph summary and a comprehensive description of the resource and its various elements as it exists today.

The St. Leonard Polling House, constructed in 1926, stands at 5095 St. Leonard Road in St. Leonard, Calvert County, Maryland. The St. Leonard Polling House is a modest, vernacular building standing one story in height and two bays in width. It is set on a stretcher-bond brick foundation that dates to 1993, when the building was moved to its current location. Detailing on the wood-frame building includes weatherboard cladding, square-edged cornerboards, an interior-end brick chimney with a corbeled cap, and a front-gabled roof. The roof is clad in pressed metal shingles and features shallow overhanging eaves. The polling house features a one-room plan with beaded paneling on the walls and ceiling and wood boards on the floor. The "Garden of Remembrance" lies to the rear of the building, with a winding path, benches, and flowerbeds.

SETTING

The St. Leonard Polling House is located on a small rectangular parcel of land, just under an acre in area, donated by the Thomas Parran family, on the west side of St. Leonard Road, just south of the St. Leonard town center. The parcel is bordered by St. Leonard Road to the east, a private dirt road to the south with an open field beyond, and mature treelines on the west and north sides. The building sits towards the east side of the parcel and serves as the visual centerpiece for a landscape park called the "Garden of Remembrance," designated as a memorial to the loved ones of the St. Leonard community. Leading from St. Leonard Road to the front of the polling house is a brick path, which then splits into two paths that follow along the foundation of the building and then rejoining in the grass beyond the polling house, creating an hourglass shape. The garden is defined by short, neatly kept grass with bushes and trees scattered about the site. Low wooden benches have been placed at various locations in the garden.

EXTERIOR DESCRIPTION

The façade or east elevation is dominated by the two entries. Identical in design and form, the entries each hold a single-leaf, five-panel wood door. Both doors feature narrow wood surrounds with a modest beaded edge and flat sills. Wood steps access each entry. A plaque reading, "St. Leonard's Polling House Circa 1926" is centrally located between the two entries. There are no other openings on this elevation.

The north and south elevations of the polling house are identical. Each holds a single 6/6 window with a narrow wood surround and a wood sill with no molding. Likewise, the west elevation is pierced by a similar 6/6 window. Unlike the openings on the other elevations, this window is not symmetrically placed on the elevation. Rather it is located on the southwest side of the elevation. The three windows on the polling house are framed by louvered shutters.

INTERIOR DESCRIPTION

The polling house is a one-room building with tongue-and-groove beaded boards on the walls and ceilings. The floors feature narrow wood planks throughout most of the room, with wider boards laid at the west end of the building. The two wood doors feature five horizontal panels and are framed by wood strips with no molding. Windows have slightly projecting wood sills with square-edged surrounds. Centrally located between the two doors is the chimney with a wood-burning stove and pipe projecting from the east side.

8. Significance

Inventory No. CT-158

Period	Areas of Significance	Check and justify below			
<input type="checkbox"/> 1600-1699	<input type="checkbox"/> agriculture	<input type="checkbox"/> economics	<input type="checkbox"/> health/medicine	<input type="checkbox"/> performing arts	
<input type="checkbox"/> 1700-1799	<input type="checkbox"/> archeology	<input type="checkbox"/> education	<input type="checkbox"/> industry	<input type="checkbox"/> philosophy	
<input type="checkbox"/> 1800-1899	<input type="checkbox"/> architecture	<input type="checkbox"/> engineering	<input type="checkbox"/> invention	<input checked="" type="checkbox"/> politics/government	
<input checked="" type="checkbox"/> 1900-1999	<input type="checkbox"/> art	<input type="checkbox"/> entertainment/ recreation	<input type="checkbox"/> landscape architecture	<input type="checkbox"/> religion	
<input type="checkbox"/> 2000-	<input type="checkbox"/> commerce	<input type="checkbox"/> ethnic heritage	<input type="checkbox"/> law	<input type="checkbox"/> science	
	<input type="checkbox"/> communications	<input type="checkbox"/> exploration/ settlement	<input type="checkbox"/> literature	<input checked="" type="checkbox"/> social history	
	<input type="checkbox"/> community planning		<input type="checkbox"/> maritime industry	<input type="checkbox"/> transportation	
	<input type="checkbox"/> conservation		<input type="checkbox"/> military	<input type="checkbox"/> other:	

Specific dates 1926; 1974

Architect/Builder Unknown

Construction dates 1926; 1993

Evaluation for:

National Register

Maryland Register

not evaluated

Prepare a one-paragraph summary statement of significance addressing applicable criteria, followed by a narrative discussion of the history of the resource and its context. (For compliance reports, complete evaluation on a DOE Form - see manual.)

The St. Leonard Polling House, built in 1926, is a rare and intact example of an early 20th century polling house. Constructed by Norman Gray, the St. Leonard Polling House originally stood on land purchased by the County Commissioners of Calvert County from Nellie Taylor in 1926. In 1930, Harry B. and Grace Trueman conveyed a one-acre tract of land to the County Commissioners of Calvert County, to which the polling house was subsequently moved. In 1993, the building was moved once again to a small county-owned plot of land at 5095 St. Leonard Road in St. Leonard, Calvert County, Maryland. Its one-room plan with two entries on the front-gabled façade typifies the form and design of the polling houses that were found throughout Calvert County. During the late 19th and early 20th centuries, the polling house served both a political and social function. It provided an essential democratic function for residents as a place to vote and a significant social function as an opportunity for interaction between widely dispersed county residents.

THE POLLING HOUSE IN CALVERT COUNTY

The polling house is a distinctive rural building type in Calvert County, of which there are few extant examples. Purchased and operated by the Calvert County Board of Commissioners, these unique buildings appear to have originated in the late 19th century and were used until World War II (1941-1945), after which voting began to be held in larger public buildings such as schoolhouses. (1) Although the operation of most polling houses was discontinued by the 1940s, the St. Leonard Polling House remained active until 1972. Often built by private individuals for the benefit of the county, polling houses were generally one-room, single-story frame structures with a gable roof and a small chimney for a heating stove. They had two doors so that voters could move efficiently through the building, with one door for entering and one door for exiting. Paper ballots were cast in wooden ballot boxes, and voting was presided over by Judges of the Election. A representative from both the Republican and Democratic parties were frequently present to observe the election process and to protect the interest of their respective parties. (2) Because of the utilitarian nature of the buildings, they were almost entirely without ornament on either the interior or the exterior.

Polling houses were built in villages and towns centrally located for voter convenience, although traveling to a polling house on voting day was often still an arduous trip for many who did not live close by. Polling houses located in smaller towns, such as Mutual, had no more than a trickle of voters throughout the day, while the polling houses for more populated areas like Prince Frederick would have lines, particularly after work. (3) Election day spurred a variety of social and commercial activity. According to one Calvert County resident, oysters were sold to voters. (4) Agnes Jefferson, daughter of Hannah Johnson Gross and Lusby area native, tells of her mother making fried chicken and crab cake sandwiches to sell at the polling houses to hungry voters on election day for a little extra cash. (5) Polling houses are known to have recently existed at Sunderland, St. Leonard, Mutual, and Owings, although at one time polling houses were located all over the county.

HISTORY OF THE ST. LEONARD POLLING HOUSE

Maryland Historical Trust

Maryland Inventory of Historic Properties Form

Inventory No CT-158

Name St. Leonard Polling House

Continuation Sheet

Number 8 Page 1

The St. Leonard Polling House was constructed by Norman Gray on land donated by Thomas Parran. According to minutes for the Board of Supervisors meeting on June 29, 1926, a contract was made with Norman Gray to "furnish material and build a polling house at St. Leonard for \$650." (6) This contract was ratified and approved at the meeting. According to Thomas Parran, Jr., the money for the construction of the new polling house was donated by Thomas Parran and, in exchange, the Old St. Leonard Polling House (CT-1282) was given to him for his personal use and moved to his property at 6310 St. Leonard Road. (7) Thomas Parran was a member of the Maryland State Congress from 1911 to 1913. Once moved to Thomas Parran's land and for the ensuing seventy-five years, the old polling house was used primarily as a storage shed. The new polling house was located on a .75 acre parcel of land conveyed from Nellie Taylor to the Calvert County Commissioners in 1926. (8) Three years later, in 1929, Harry B. and Grace Trueman acquired 9 acres from Thomas and Madeline Parran. (9) In 1930 the Truemans conveyed one acre of this tract to the Calvert County Commissioners, to which they subsequently moved the new St. Leonard Polling House. (10)

The Old St. Leonard Polling House, built circa 1910, is a one-room, single-story wood frame structure with a gable roof clad in wood shingles. The doors of the original polling house are on opposite walls from one another, suggesting that voters would proceed in a straight line past the ballot boxes and election judges and out the other side. The new St. Leonard Polling House, built in 1926 to replace the earlier polling house, is similar in form, although slightly larger and roofed in pressed metal shingles rather than wood shingles. Further, the doors of the St. Leonard Polling House are located on the same wall, separated by a heating stove chimney, with a single window in each of the three remaining walls. Voters entered the polling house through one door, approached the ballot boxes at the opposite end of the room, and then exited out the other door in a semi-circular path.

The new St. Leonard Polling House was moved three times in its history. The first move, outlined above, occurred in 1930 when the polling house was moved from land acquired from Nellie Taylor to the land of Harry Trueman. The polling house was once again moved by Trueman, but remained on the same parcel of land. (11) Although many of the polling houses in Calvert County had become defunct by mid-century, the St. Leonard Polling House continued to operate until 1972. In 1993, the polling house was moved to its current location at 5905 St. Leonard Road. The Garden of Remembrance was laid out at this time to serve as a place of remembrance honoring those who have contributed to the St. Leonard Community, as well as those of national significance with connections to St. Leonard, including two Presidential First Ladies: Louisa Catherine Johnson Adams and Margaret Mackall Smith Taylor.

CHAIN OF TITLE FOR THE CURRENT LOCATION OF THE POLLING HOUSE

July 30, 1929: Thomas Parran to Harry B. and Grace Trueman
Land Records of Calvert County
Liber AAH 23, Folio 326

March 10, 1930: Harry B. and Grace Trueman to County Commissioners of Calvert County
Land Records of Calvert County
Liber AAH 23, Folio 486

ENDNOTES

1. Oliver Foote, Agnes Jefferson and Eugene Ward, interview by Robin J. Weidlich, Lusby, MD, June 11, 2002.
2. Waters Ross, interview by Carrie E. Albee, Mutual, June 13, 2002.
3. Ross.
4. Memorandum from Jenny Plummer-Welker to the Calvert County Board of Commissioners, August 1, 2001, Mutual Polling House Vertical File, Calvert County Planning and Zoning Department, Prince Frederick, MD.

Maryland Historical Trust

Maryland Inventory of Historic Properties Form

Inventory No CT-158

Name St. Leonard Polling House

Continuation Sheet

Number 8 Page 2

-
5. Foote, Jefferson and Ward.
 6. Calvert County Supervisors Meeting Minutes, June 29, 1926, St. Leonard Polling House, CT-185, Vertical Files, Calvert County Planning and Zoning Department, Prince Frederick, MD.
 7. Thomas Parran, interview by Robin Weidlich, St. Leonard, MD, April 25, 2002.
 8. Land Records of Calvert County, Liber AAH 14, Folio 151, Calvert County Courthouse, Prince Frederick, MD.
 9. Land Records of Calvert County, Liber AAH 23, Folio 326, Calvert County Courthouse, Prince Frederick, MD.
 10. Land Records of Calvert County, Liber AAH 23, Folio 486, Calvert County Courthouse, Prince Frederick, MD.
 11. "Fact Sheet on Polling House," St. Leonard Polling House, CT-158, Vertical Files, Calvert County Planning and Zoning Department, Prince Frederick, MD.

9. Major Bibliographical References

Inventory No. CT-158

See continuation sheet.

10. Geographical Data

Acreage of surveyed property 0.90 AcresAcreage of historical setting 0.90 AcresQuadrangle name Broomes IslandQuadrangle scale 1:24,000

Verbal boundary description and justification

Constructed in 1926, the St. Leonard Polling House was moved twice and has been associated with Parcel 61, as denoted on Tax Map 31, since 1993.

11. Form Prepared By

name/title R. Weidlich and C. Albee, Architectural Historiansorganization E.H.T. Traceries, Inc.date 8/26/02street and number 1121 Fifth Street, N.W.telephone 202/393-1199city or town Washingtonstate DC zip code 20001

The Maryland Inventory of Historic Properties was officially created by an Act of the Maryland Legislature to be found in the Annotated Code of Maryland, Article 41, Section 181 KA, 1974 supplement.

The survey and inventory are being prepared for information and record purposes only and do not constitute any infringement of individual property rights.

return to: **Maryland Historical Trust**
DHCD/DHCP
100 Community Place
Crownsville MD 21032
410-514-7600

**Maryland Historical Trust
Maryland Inventory of
Historic Properties Form**


Inventory No. CT-158

Name St. Leonard Polling House

Continuation Sheet

Number 9 Page 1

St. Leonard Polling House, CT-158, Verical Files, Calvert County Planning and Zoning Department, Prince Frederick, MD.

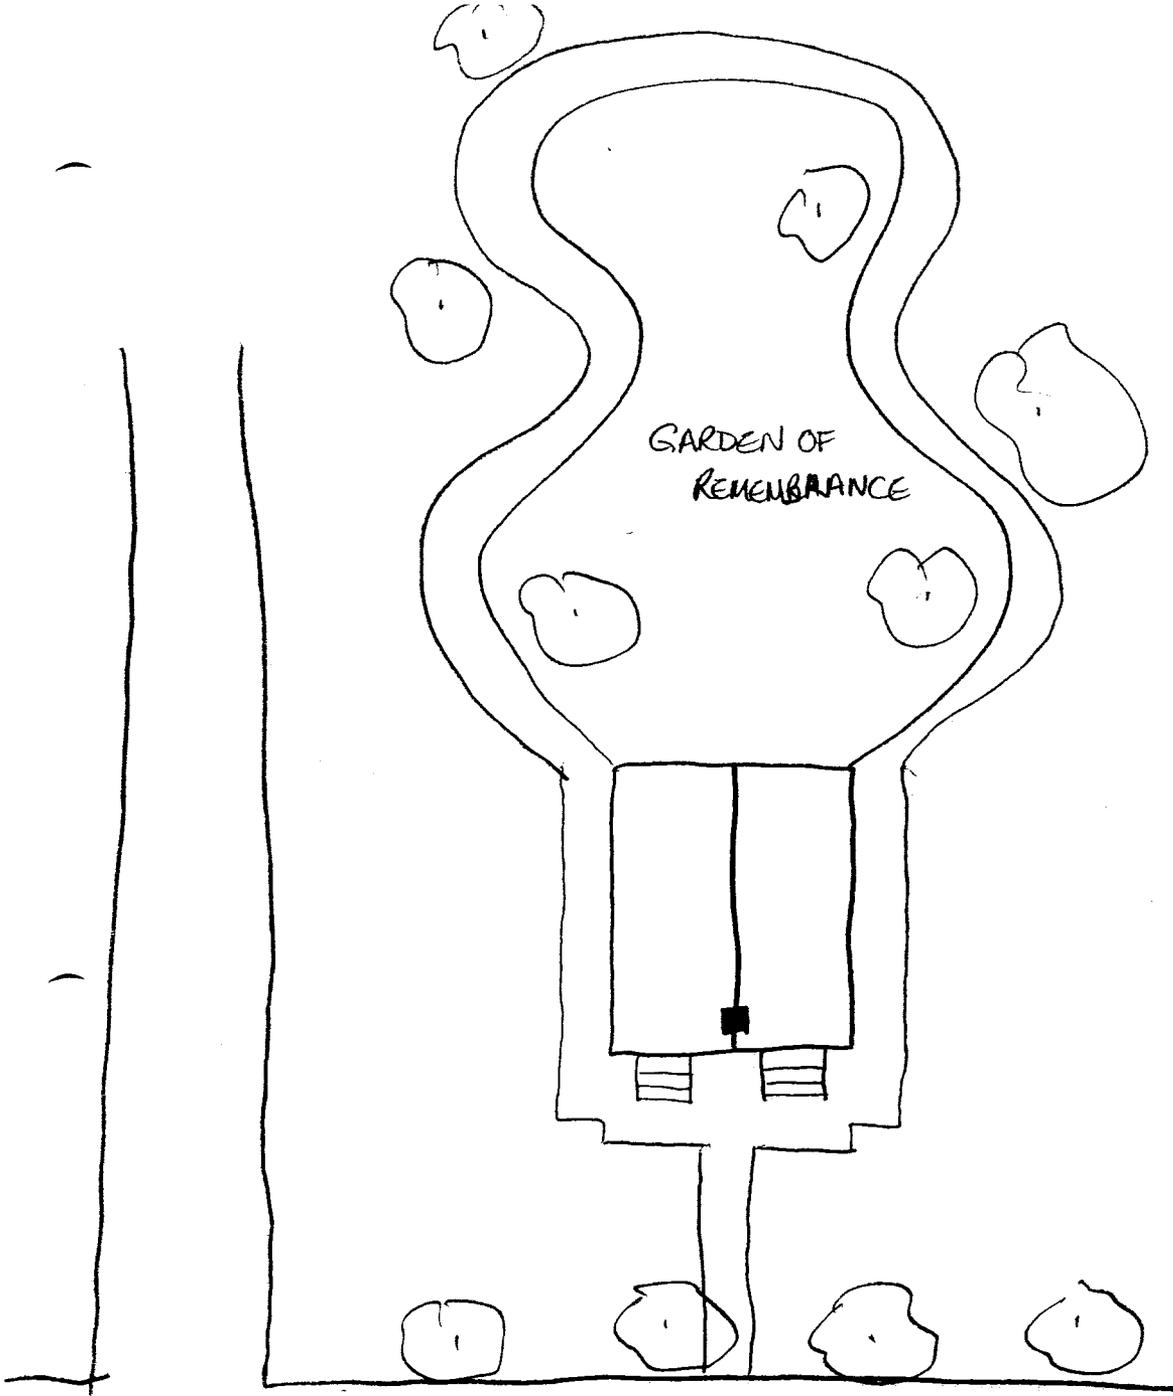

ST. LEONARD ROAD

RESOURCE SKETCH MAP

CT-158


ST. LEONARD POLLING HOUSE

5095 ST. LEONARD ROAD

ST. LEONARD, CALVERT COUNTY, MD

N →


MAY 2002

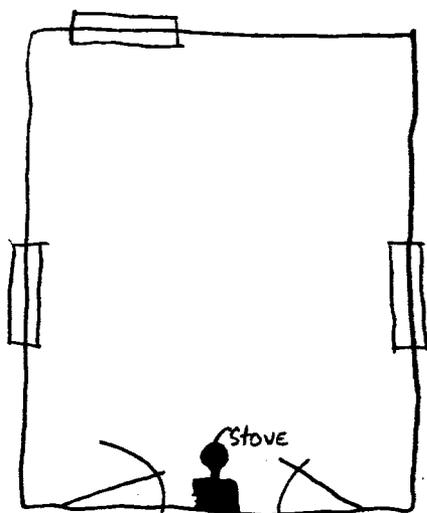

N →

CT-158
ST. LEONARD POLLING HOUSE
5095 ST. LEONARD ROAD
ST. LEONARD, CALVERT COUNTY, MD

NOT DRAWN TO SCALE
FIRST FLOOR PLAN
MAY 2002

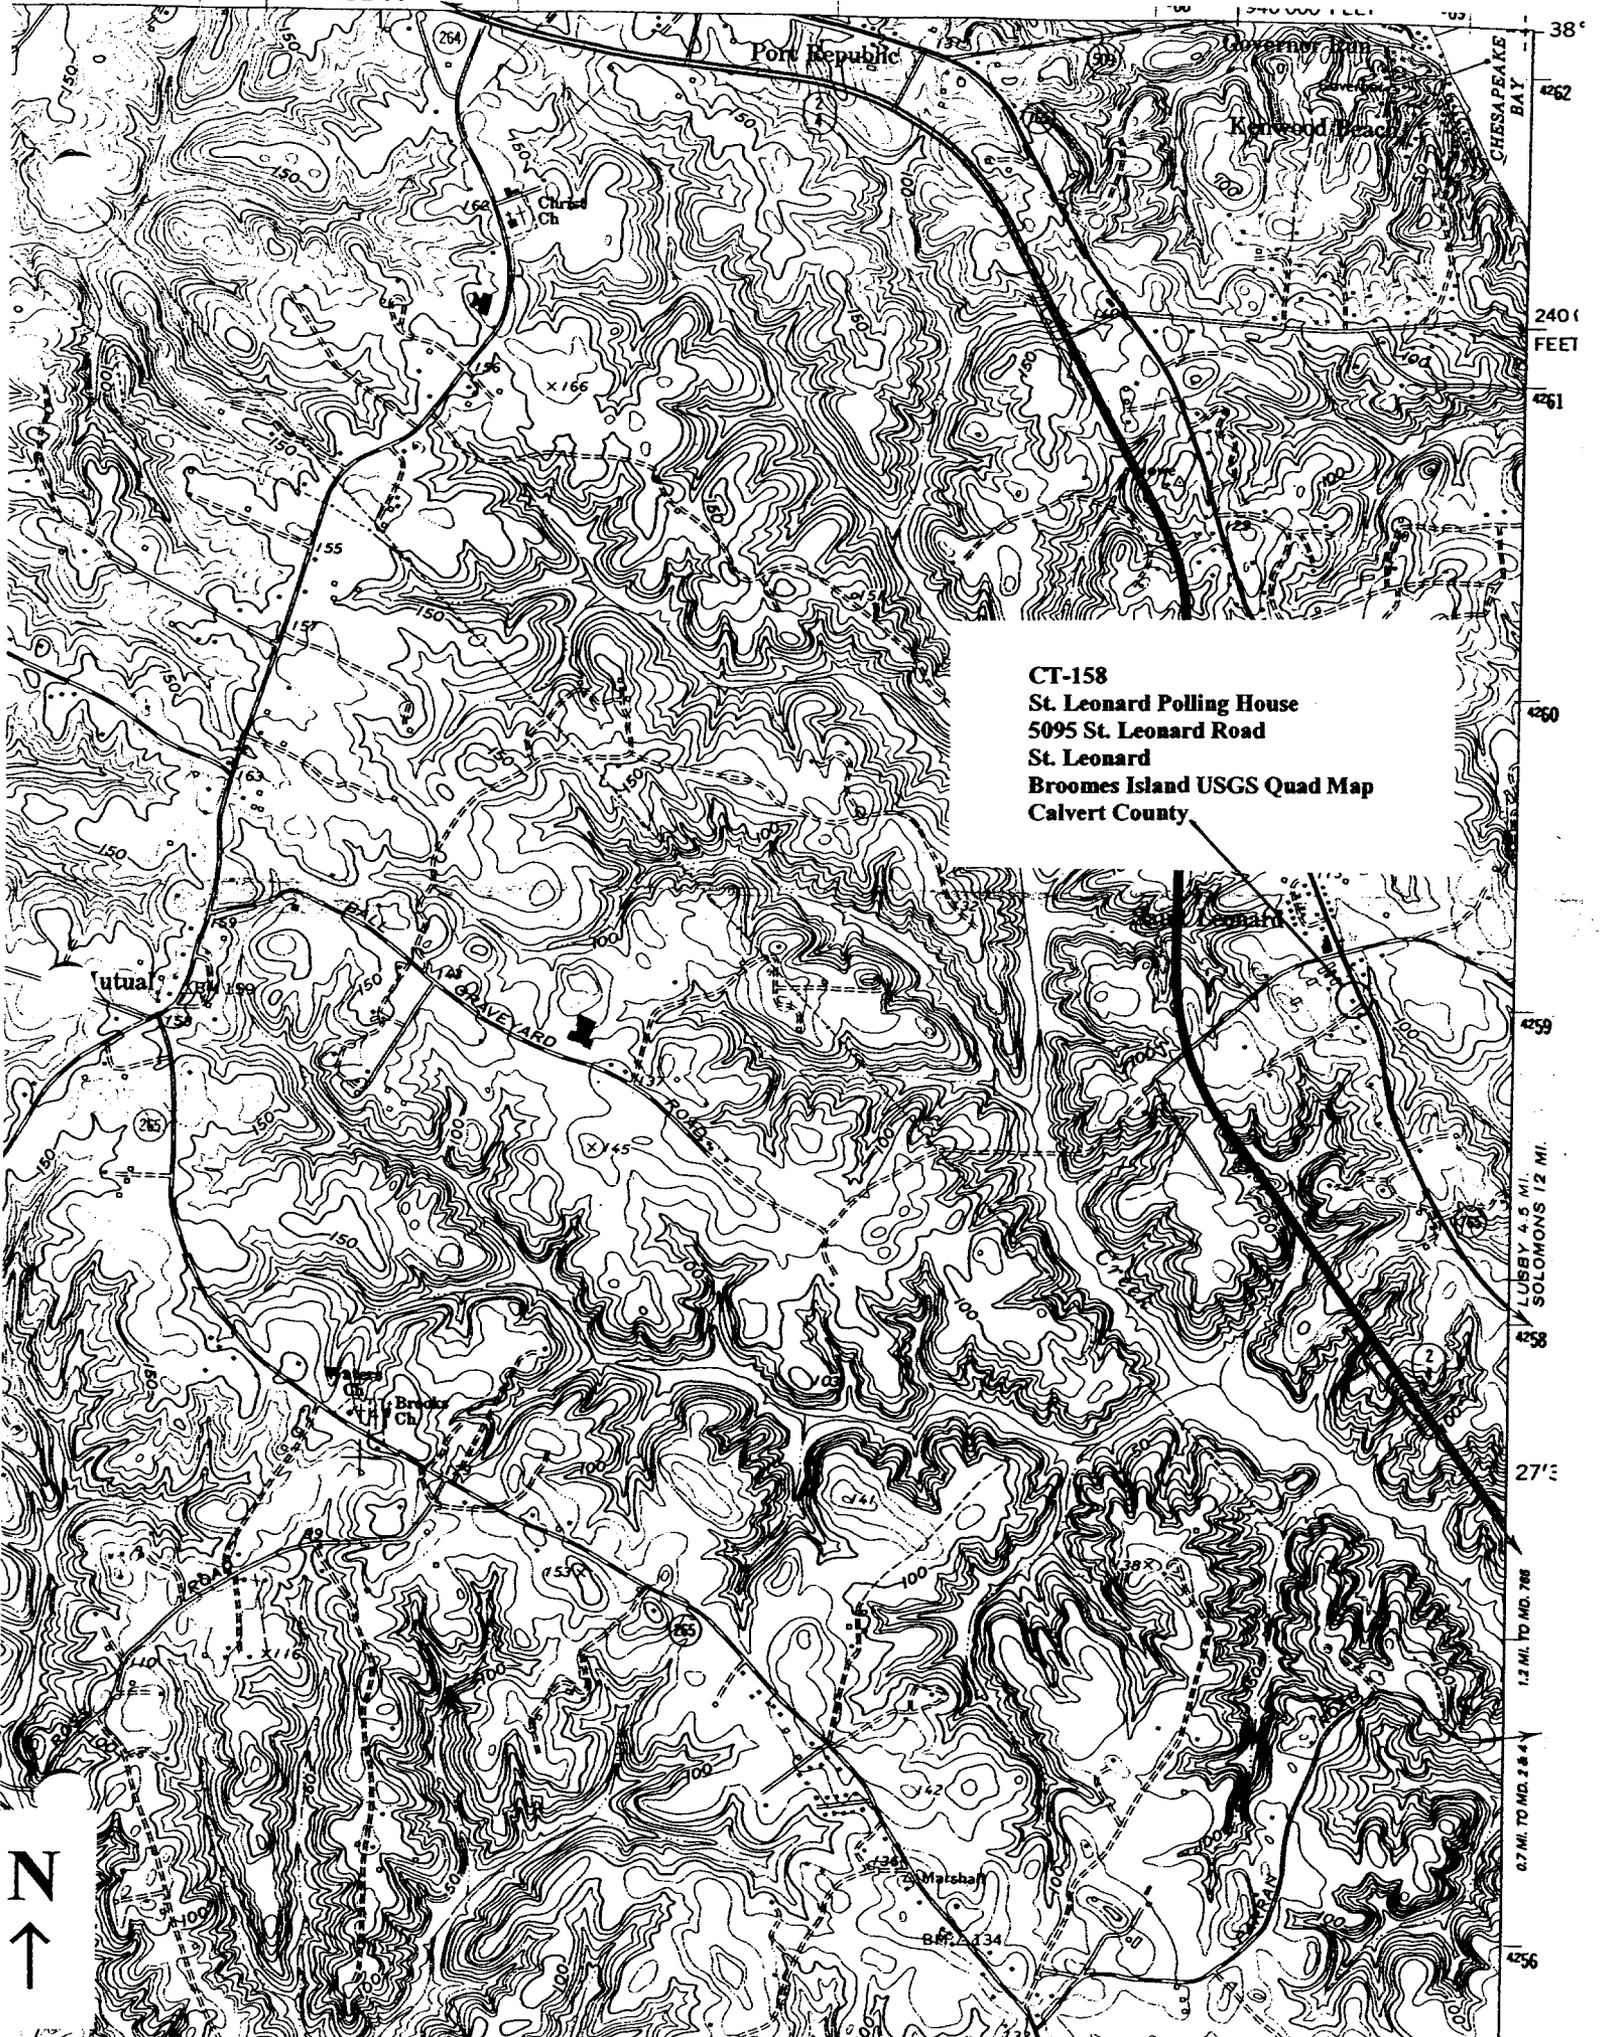

CT-158
St. Leonard Polling House
5095 St. Leonard Road
St. Leonard
Broomes Island USGS Quad Map
Calvert County



38°
462
240
FEET
461
460
63
4.5 MI.
SOLOMONS 12 MI.
27°E
1.2 MI. TO MD. 788
0.7 MI. TO MD. 284
426



W. C.
ST. LOUIS
CHURCH
BUILT 1857

CT-158

ST. LEONARD POLLING HOUSE

5095 ST. LEONARD ROAD

CALVERT COUNTY, MD

EHT TRACERIES

MAY 2002

MARYLAND SHPO

SOUTHEAST CORNER, LOOKING NORTHWEST

1 OF 4



CT-158

ST. LEONARD FOLLING HOUSE

5095 ST. LEONARD ROAD

CALVERT COUNTY, MD

HIT TRACERIES

MAY 2002

MARYLAND SHPO

NORTHEAST CORNER, LOOKING SOUTHWEST

2 OF 4



CT-158

ST. LEONARD POLLING HOUSE

5095 ST. LEONARD ROAD

CALVERT COUNTY, MD

EHT TRACERIES

MAY 2002

MARYLAND SHPO

SOUTHWEST CORNER, LOOKING NORTHEAST

3 OF 4



CT-158

ST. LEONARD POLLING HOUSE

5095 ST. LEONARD ROAD

CALVERT COUNTY, MD

EHT TRACERIES

MAY 2002

MARYLAND SHPO

POLLING ROOM, LOOKING EAST

4 OF 4

Maryland Historical Trust State Historic Sites Inventory Form

Survey No. CT-158

Magi No. 0501585804

DOE yes no

1. Name (indicate preferred name)

historic St. Leonard Polling House

and/or common

2. Location

street & number West side Solomons Island Road (Now St. Leonard Road, MD Rt. 765) not for publicationcity, town St. Leonard vicinity of congressional districtstate Maryland county

3. Classification

Category	Ownership	Status	Present Use	
<input type="checkbox"/> district	<input type="checkbox"/> public	<input type="checkbox"/> occupied	<input type="checkbox"/> agriculture	<input type="checkbox"/> museum
<input type="checkbox"/> building(s)	<input checked="" type="checkbox"/> private	<input checked="" type="checkbox"/> unoccupied	<input type="checkbox"/> commercial	<input type="checkbox"/> park
<input checked="" type="checkbox"/> structure	<input type="checkbox"/> both	<input type="checkbox"/> work in progress	<input type="checkbox"/> educational	<input type="checkbox"/> private residence
<input type="checkbox"/> site	Public Acquisition	Accessible	<input type="checkbox"/> entertainment	<input type="checkbox"/> religious
<input type="checkbox"/> object	<input type="checkbox"/> in process	<input checked="" type="checkbox"/> yes: restricted	<input type="checkbox"/> government	<input type="checkbox"/> scientific
	<input checked="" type="checkbox"/> being considered	<input type="checkbox"/> yes: unrestricted	<input type="checkbox"/> industrial	<input type="checkbox"/> transportation
	<input type="checkbox"/> not applicable	<input type="checkbox"/> no	<input type="checkbox"/> military	<input type="checkbox"/> other:

4. Owner of Property (give names and mailing addresses of all owners)

name Mrs. Harry B. Truemanstreet & number St. Leonard telephone no.:city, town Maryland state and zip code

5. Location of Legal Description

courthouse, registry of deeds, etc. County Courthouse liber # JLB 69/574street & number foliocity, town Prince Frederick state Maryland

6. Representation in Existing Historical Surveys

title

date federal state county local

depository for survey records

city, town state

7. Description

Survey No. CT-158

Condition		Check one	Check one	
<input type="checkbox"/> excellent	<input type="checkbox"/> deteriorated	<input checked="" type="checkbox"/> unaltered	<input type="checkbox"/> original site	
<input checked="" type="checkbox"/> good	<input type="checkbox"/> ruins	<input type="checkbox"/> altered	<input checked="" type="checkbox"/> moved	date of move _____
<input type="checkbox"/> fair	<input type="checkbox"/> unexposed			

Prepare both a summary paragraph and a general description of the resource and its various elements as it exists today.

The St. Leonard Polling House is located on the west side of Solomons Island Road (old Maryland Route 2/4) on the southern edge of St. Leonard, just south of the intersection with Calvert Beach Road. The building is sited on an open lot facing east about 50 yards from the road.

The building is a square frame structure measuring 16 feet 2 inches long and 16 feet 4 inches wide. It is one story high with a pitched gable roof oriented on an east-west axis. The building rests on low brick piers and is covered with plain horizontal siding and pressed metal roofing shingles. The framing members are circular sawn and secured with wire nails; the weatherboards with cut nails.

There are two doors in the east gable wall (facing the road) flanking a flush brick stove chimney. A single 6/6 window is centered in the north and south facade walls, and one 6/6 window is offset to south of center on the rear or west gable wall. The siding is narrow and trimmed with plain corner boards; the eaves oversail and are sheathed in. The roofing material consists of pattern metal "shingles" that appear to be laid in single-course strips. The brick stove chimney is centered on the east end of the roof ridge.

The interior of the building consists of a single room with a plastered brick stove chimney centered on the east gable wall between the two doors. The walls and ceiling are sheathed with narrow beaded paneling; the floor consists of narrow tongue-and-groove flooring. Wide one-inch boards have been laid across the west end of the room, presumably in some way related to the voting booths. The windows and doors are framed with plain trim; there is no baseboard. A trap door in the ceiling opens into an unfinished loft. A cheap metal wood stove remains in place, connected to the stove chimney, and four old chairs and six election instruction posters survive. A handlettered sign signifies that the north door was the exit.

Orlando Ridout V
April 25, 1983.

8. Significance

Survey No. CT-158

Period	Areas of Significance—Check and justify below			
<input type="checkbox"/> prehistoric	<input type="checkbox"/> archeology-prehistoric	<input type="checkbox"/> community planning	<input type="checkbox"/> landscape architecture	<input type="checkbox"/> religion
<input type="checkbox"/> 1400-1499	<input type="checkbox"/> archeology-historic	<input type="checkbox"/> conservation	<input type="checkbox"/> law	<input type="checkbox"/> science
<input type="checkbox"/> 1500-1599	<input type="checkbox"/> agriculture	<input type="checkbox"/> economics	<input type="checkbox"/> literature	<input type="checkbox"/> sculpture
<input type="checkbox"/> 1600-1699	<input checked="" type="checkbox"/> architecture	<input type="checkbox"/> education	<input type="checkbox"/> military	<input type="checkbox"/> social/ humanitarian
<input type="checkbox"/> 1700-1799	<input type="checkbox"/> art	<input type="checkbox"/> engineering	<input type="checkbox"/> music	<input type="checkbox"/> theater
<input type="checkbox"/> 1800-1899	<input type="checkbox"/> commerce	<input type="checkbox"/> exploration/settlement	<input type="checkbox"/> philosophy	<input type="checkbox"/> transportation
<input checked="" type="checkbox"/> 1900-	<input type="checkbox"/> communications	<input type="checkbox"/> industry	<input checked="" type="checkbox"/> politics/government	<input type="checkbox"/> other (specify)
		<input type="checkbox"/> invention		

Specific dates	Builder/Architect
check: Applicable Criteria: <input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D and/or Applicable Exception: <input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D <input type="checkbox"/> E <input type="checkbox"/> F <input type="checkbox"/> G	
Level of Significance: <input type="checkbox"/> national <input type="checkbox"/> state <input type="checkbox"/> local	

Prepare both a summary paragraph of significance and a general statement of history and support.

The present owners of the Polling House remember that David Gray built it for Harry B. Trueman during the late 1920's or early 1930's. They also recall that it has been moved twice. A title search shows two transactions for a small piece of land in St. Leonard between the Trueman family and the County Commissioners, one for 1926 and another in 1930. It is not clear if either or both pertain to this particular building, although both apparently are related to a polling place.

The building is like several others in Calvert County: it is a single room, single story frame structure with a gable-end roof designed with two doors in its front facade. The building is longitudinal in plan and the two doors provide an entrance and exit for voters who would enter one door, place their ballot in a ballot box and then exit through the other door. Such a system accommodated a line of people facilitating continuous movement.

Wayne L. Nield II
Winter 1976-77.

MARYLAND HISTORICAL TRUST

CLVT 158

APR 19 07 1969

INVENTORY FORM FOR STATE HISTORIC SITES SURVEY

1 NAME

HISTORIC Polling House, St. Leonards AND/OR COMMON

2 LOCATION

STREET & NUMBER St. Leonards CITY, TOWN CONGRESSIONAL DISTRICT STATE VICINITY OF COUNTY

3 CLASSIFICATION

Table with 4 columns: CATEGORY, OWNERSHIP, STATUS, PRESENT USE. Includes options like DISTRICT, BUILDING(S), STRUCTURE, PUBLIC ACQUISITION, OCCUPIED, UNOCCUPIED, WORK IN PROGRESS, AGRICULTURE, MUSEUM, etc.

4 OWNER OF PROPERTY

NAME Mrs. Harry B. Trueman Telephone #: STREET & NUMBER St. Leonard CITY, TOWN STATE, zip code VICINITY OF

5 LOCATION OF LEGAL DESCRIPTION

COURTHOUSE, REGISTRY OF DEEDS, ETC. STREET & NUMBER CITY, TOWN STATE Liber #: JTB 69/574 Folio #:

6 REPRESENTATION IN EXISTING SURVEYS

TITLE DATE DEPOSITORY FOR SURVEY RECORDS CITY, TOWN STATE FEDERAL STATE COUNTY LOCAL

7 DESCRIPTION

CT-158

CONDITION		CHECK ONE	CHECK ONE
<input type="checkbox"/> EXCELLENT	<input type="checkbox"/> DETERIORATED	<input checked="" type="checkbox"/> UNALTERED	<input type="checkbox"/> ORIGINAL SITE
<input checked="" type="checkbox"/> GOOD	<input type="checkbox"/> RUINS	<input type="checkbox"/> ALTERED	<input checked="" type="checkbox"/> MOVED DATE _____
<input type="checkbox"/> FAIR	<input type="checkbox"/> UNEXPOSED		

DESCRIBE THE PRESENT AND ORIGINAL (IF KNOWN) PHYSICAL APPEARANCE

The present owners of the Polling House remember that David Gray built it for Harry B. Trueman during the late 1920's or early 1930's. They also recall that it has been moved twice. A title search shows two transactions for a small piece of land in St. Leonards between the Trueman family and the County Commissioners, one for 1926 and another in 1930. It is not clear if either or both pertain to this particular building, although both apparently are related to a polling place.

The building is like several others in the County, it is a single room, single story frame structure with a gable-end roof designed with two doors in its front facade. The building is longitudinal in plan and the two doors provide an entrance and exit for voters who would enter one door, place their ballot in a ballot box and then exit through the other door. Such a system accommodated a line of people facilitating continuous movement.

CONTINUE ON SEPARATE SHEET IF NECESSARY

8 SIGNIFICANCE

CT-158

PERIOD	AREAS OF SIGNIFICANCE -- CHECK AND JUSTIFY BELOW			
<input type="checkbox"/> PREHISTORIC	<input type="checkbox"/> ARCHEOLOGY-PREHISTORIC	<input type="checkbox"/> COMMUNITY PLANNING	<input type="checkbox"/> LANDSCAPE ARCHITECTURE	<input type="checkbox"/> RELIGION
<input type="checkbox"/> 1400-1499	<input type="checkbox"/> ARCHEOLOGY-HISTORIC	<input type="checkbox"/> CONSERVATION	<input type="checkbox"/> LAW	<input type="checkbox"/> SCIENCE
<input type="checkbox"/> 1500-1599	<input type="checkbox"/> AGRICULTURE	<input type="checkbox"/> ECONOMICS	<input type="checkbox"/> LITERATURE	<input type="checkbox"/> SCULPTURE
<input type="checkbox"/> 1600-1699	<input type="checkbox"/> ARCHITECTURE	<input type="checkbox"/> EDUCATION	<input type="checkbox"/> MILITARY	<input type="checkbox"/> SOCIAL/HUMANITARIAN
<input type="checkbox"/> 1700-1799	<input type="checkbox"/> ART	<input type="checkbox"/> ENGINEERING	<input type="checkbox"/> MUSIC	<input type="checkbox"/> THEATER
<input type="checkbox"/> 1800-1899	<input type="checkbox"/> COMMERCE	<input type="checkbox"/> EXPLORATION/SETTLEMENT	<input type="checkbox"/> PHILOSOPHY	<input type="checkbox"/> TRANSPORTATION
<input checked="" type="checkbox"/> 1900-	<input type="checkbox"/> COMMUNICATIONS	<input type="checkbox"/> INDUSTRY	<input type="checkbox"/> POLITICS/GOVERNMENT	<input type="checkbox"/> OTHER (SPECIFY)
		<input type="checkbox"/> INVENTION		

SPECIFIC DATES

BUILDER/ARCHITECT

STATEMENT OF SIGNIFICANCE

CONTINUE ON SEPARATE SHEET IF NECESSARY

9 MAJOR BIBLIOGRAPHICAL REFERENCES

CONTINUE ON SEPARATE SHEET IF NECESSARY

10 GEOGRAPHICAL DATA

ACREAGE OF NOMINATED PROPERTY _____

VERBAL BOUNDARY DESCRIPTION

LIST ALL STATES AND COUNTIES FOR PROPERTIES OVERLAPPING STATE OR COUNTY BOUNDARIES

STATE	COUNTY

11 FORM PREPARED BY

NAME / TITLE

Wayne L. Nield II

DATE Winter 76-77

ORGANIZATION

Historic Sites Survey

TELEPHONE

STREET & NUMBER

c/o Planning Office

STATE

CITY OR TOWN

Prince Frederick, MD 20678

The Maryland Historic Sites Inventory was officially created by an Act of the Maryland Legislature, to be found in the Annotated Code of Maryland, Article 41, Section 181 KA, 1974 Supplement.

The Survey and Inventory are being prepared for information and record purposes only and do not constitute any infringement of individual property rights.

RETURN TO: Maryland Historical Trust
 The Shaw House, 21 State Circle
 Annapolis, Maryland 21401
 (301) 267-1438

TITLE

69/574 November 10, 1964
G. Trueman

GWD 16/400 April 10, 1916
James Grover and wife--H. Trueman


AAH 23/486 March 10, 1930
Harry B. and Grace Trueman--County Commissioners
one acre on west side of road from St. Leonards, Solomons

AAH/487
3/4 of acre obtained from Nellies Taylor
April 28, 1926 AAH 14/151

AAH/ 14/151 April 28, 1926
Nellie Taylor--County Commissioners
similiar description for 3/4 acres on inter~~section~~ of Solomons
Road and old road to Mutual.


Polling House , St. Leonards

It is known that the polling house in Juniperland had a railing at fence line inside which formed a passageway within the building that gave direction to traffic. A sign, which still hangs in that structure, informs us that voters had, by law, no more than one minute to cast their vote. The polling house at St. Leonards is nearly identical in design. The single room frame building has a cartwright roof and a single flue chimney for a space heater. It is notable for having two doors in its west gable end, which facilitated the in-and-out traffic necessary to its purpose. The building has been moved twice but has been in the same neighborhood since its construction, sometime between 1926 and 1950.

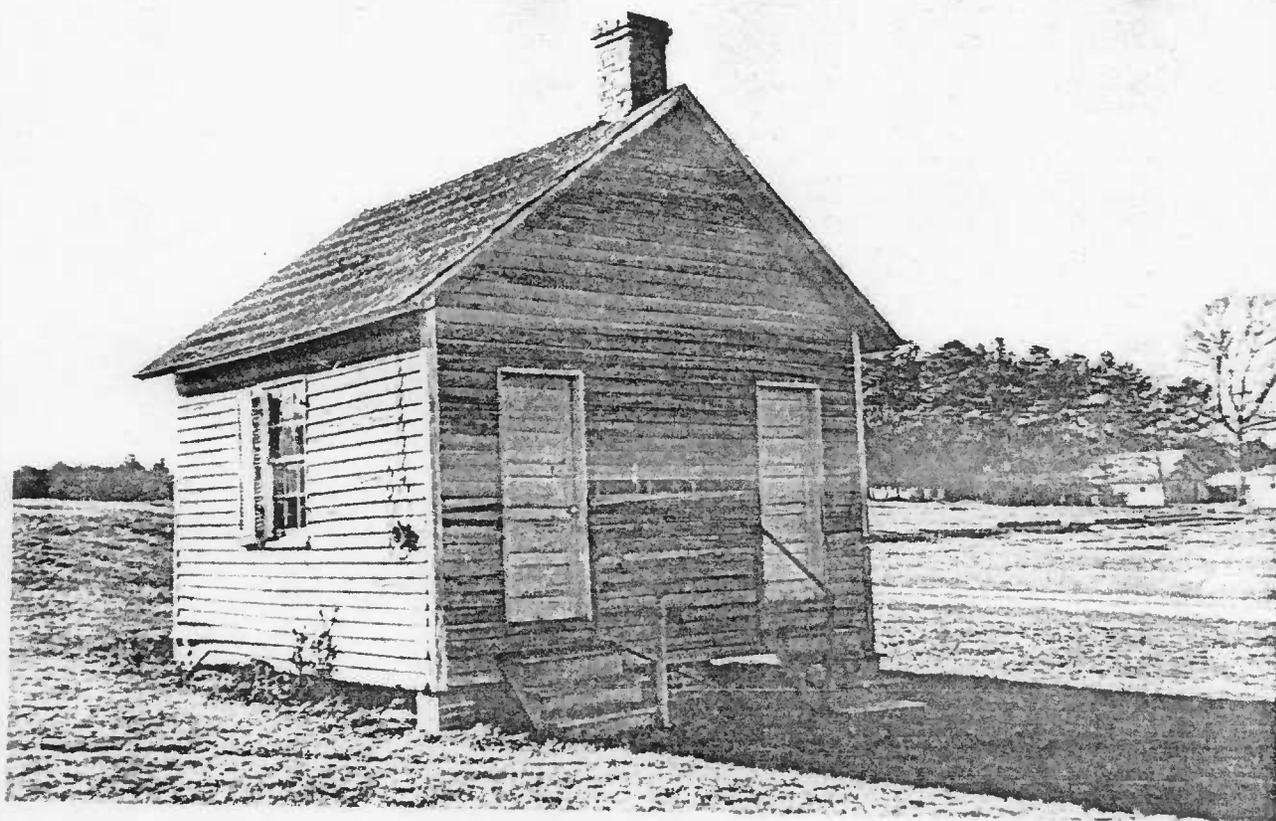

CT-158

30

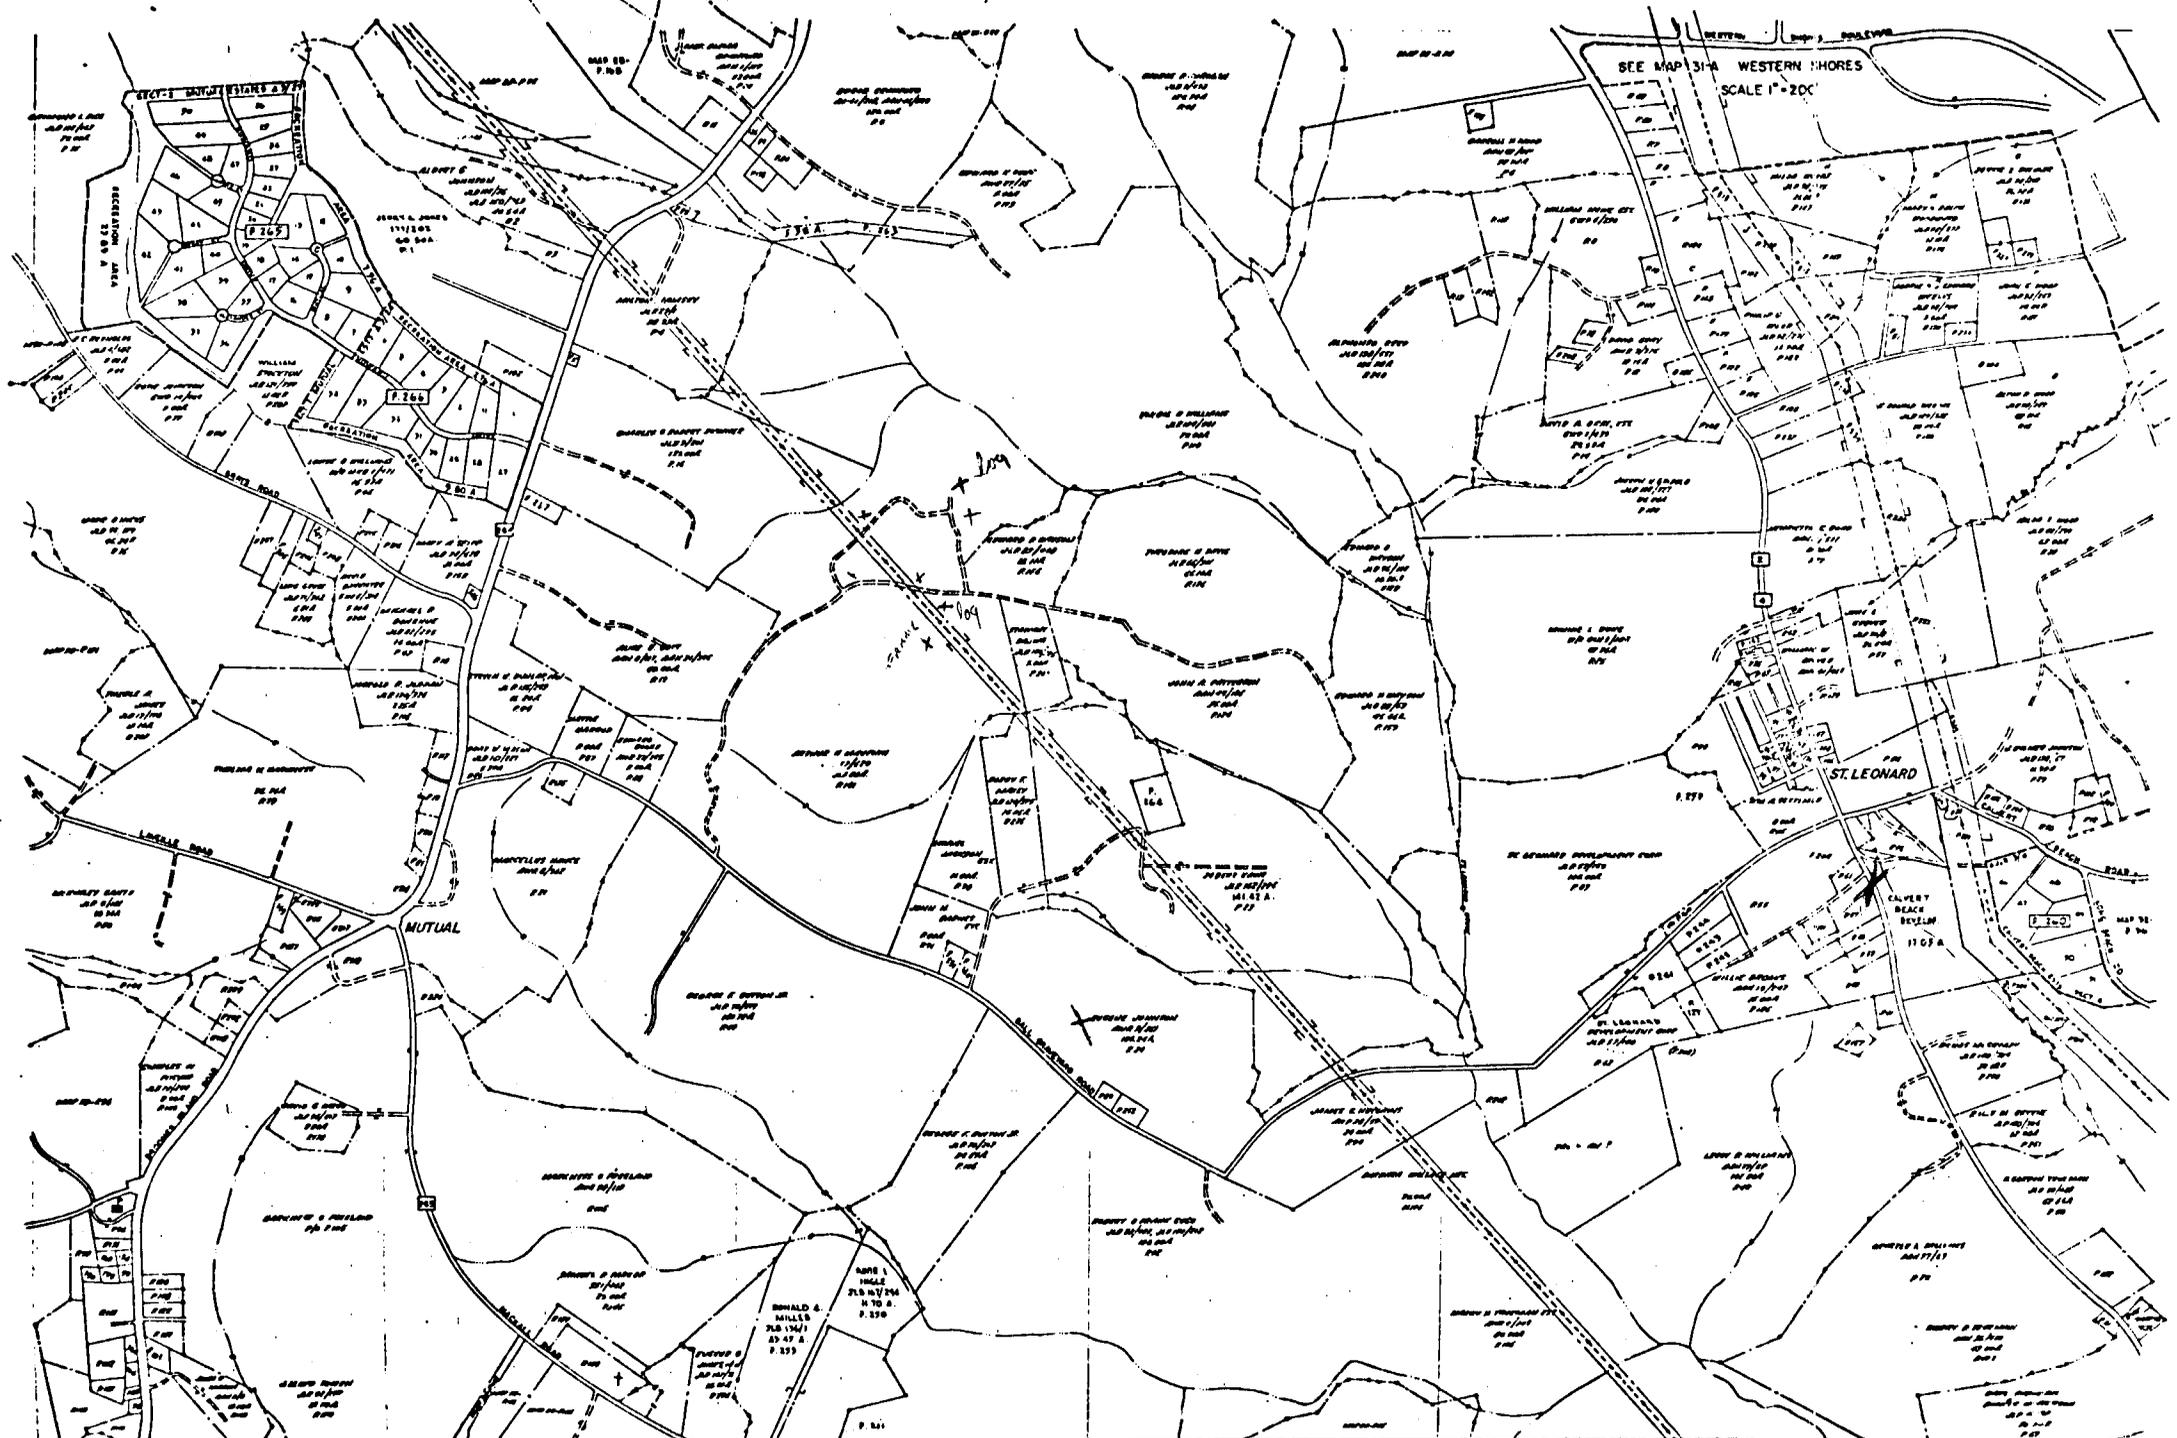

240

237

234

231

228

MAP NO. 31

926


COPYRIGHT - MAP DIVISION - 1947
 MO. DEPT. OF ASSESS. & TAX.

929

ONE MAP CONSTRUCTED 9-8-71
 FROM 1941 QUAD
 PLANNING NO. 10 279
 MAP NUMBER 31-A 71

935

DEPT. OF ASSESSMENTS & TAXATION TAX MAP DIVISION MAP NO. 31-A WESTERN MOORES SCALE 1" = 600' JUNE 12, 1922	PROPERTY LINE S.W. DIV. W.B. BOUNDARY CONTAINING ONE MAP PARCEL NUMBER - P. 311 SCALE 1" = 600' JUNE 12, 1922
---	--

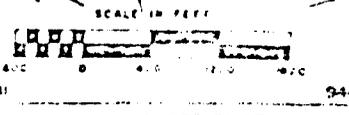

MAP NO. 31

CLAYTON COUNTY MO. 228

20376

CHESAPEAKE

BAY

GOVERNORS RUN

SAINT LEONARD


CT-158
ADC of Alexandria, Inc., 1992

Joins Map 12 240,000 FT

MD 230,000 FT

18 © ADC OF ALEXANDRIA, INC.

Joins Map 16 MD GRID 950,000 FT

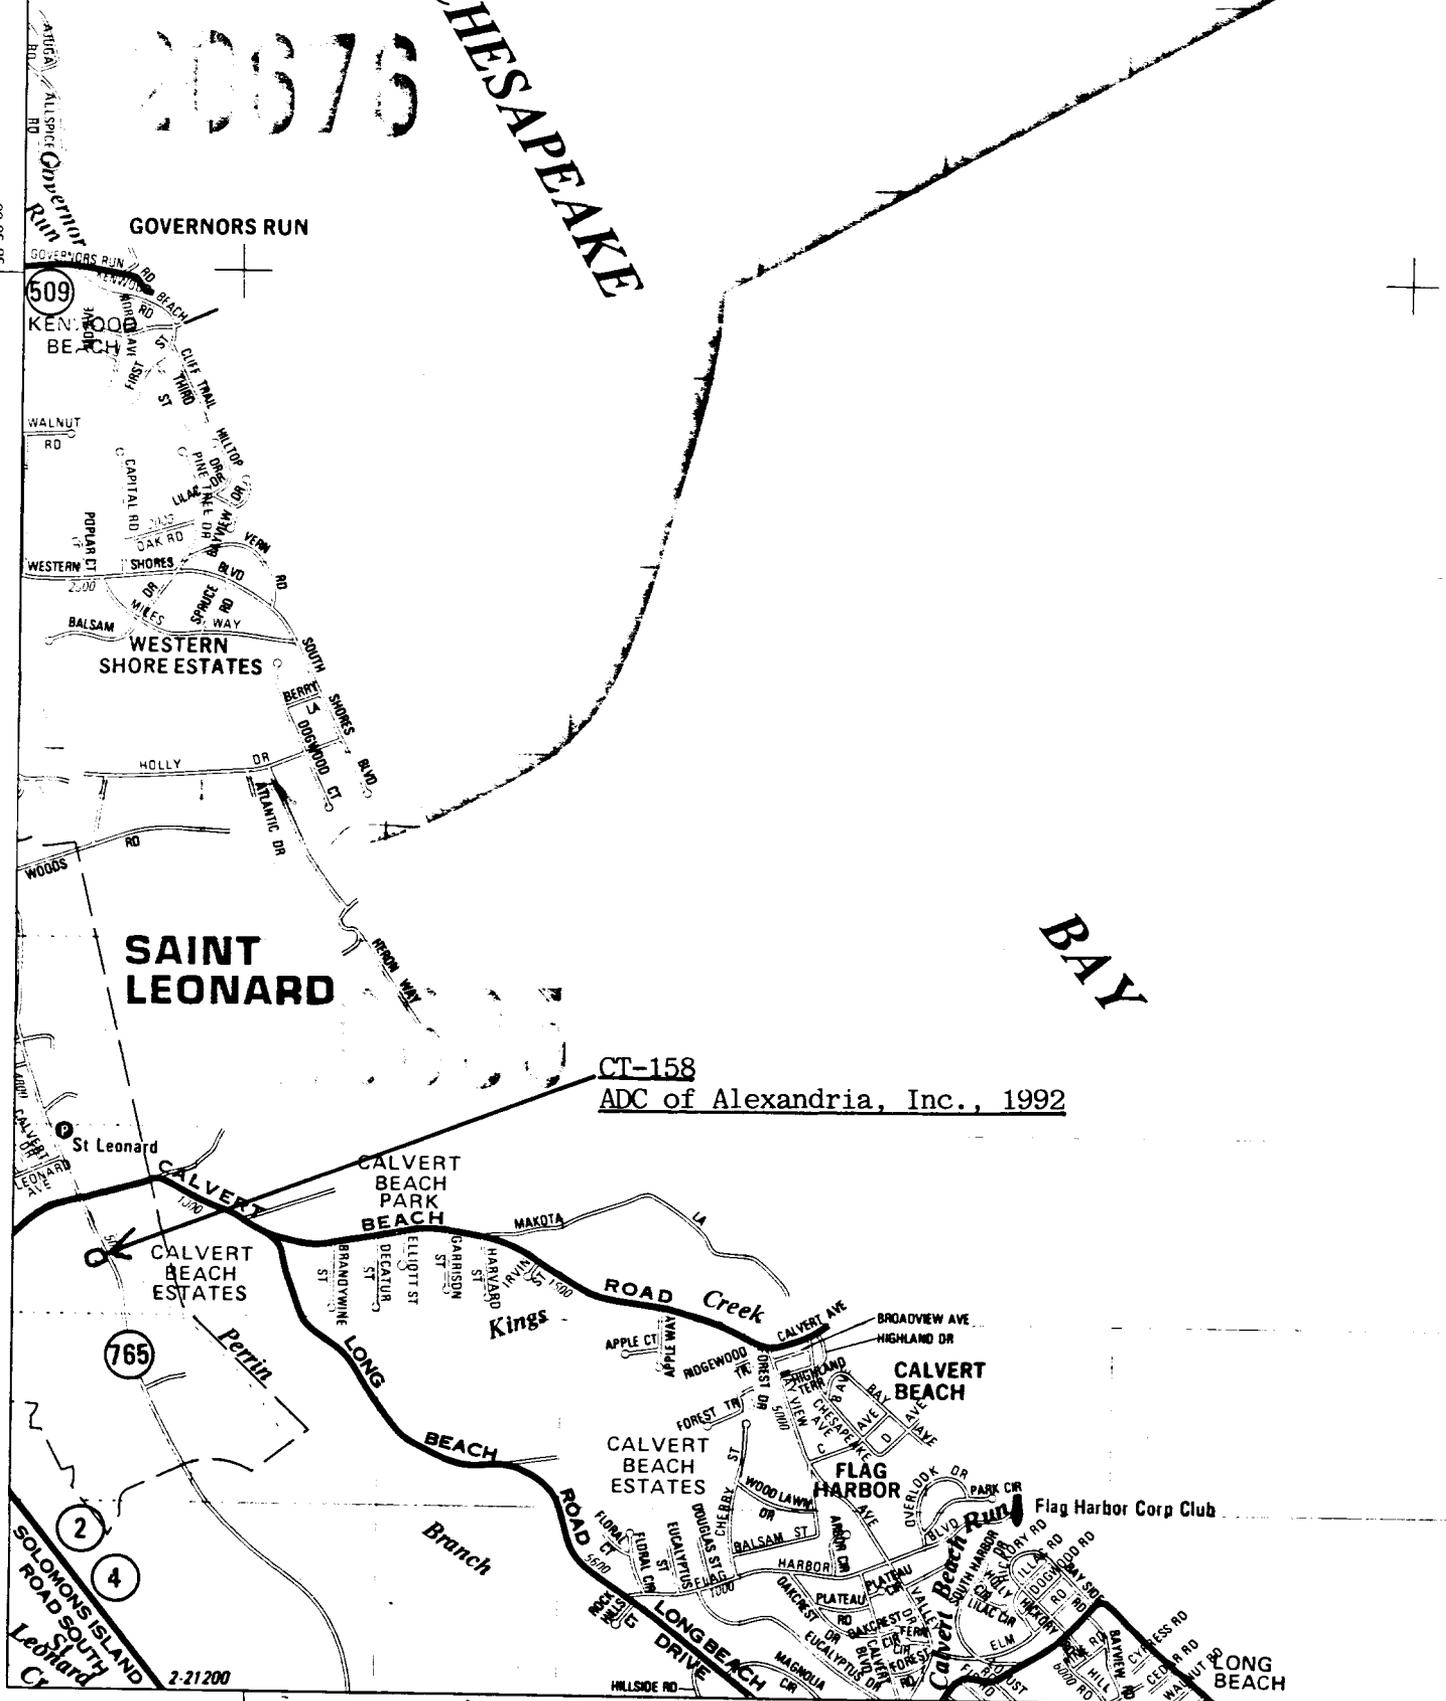

509

KENWOOD BEACH

WESTERN SHORE ESTATES

St Leonard

765

2

4

2-21200


76°30' 00"

76°27' 30"

CT-158

BROOMES ISLAND QUADRANGLE
MARSHALL ISLANDS
15-MINUTE SERIES TOPOGRAPHIC
MAP OF THE TERRITORY OF GUINEA

155 156 157 158 159 160
32'30" 32'00" 31'30" 31'00" 30'30" 30'00"

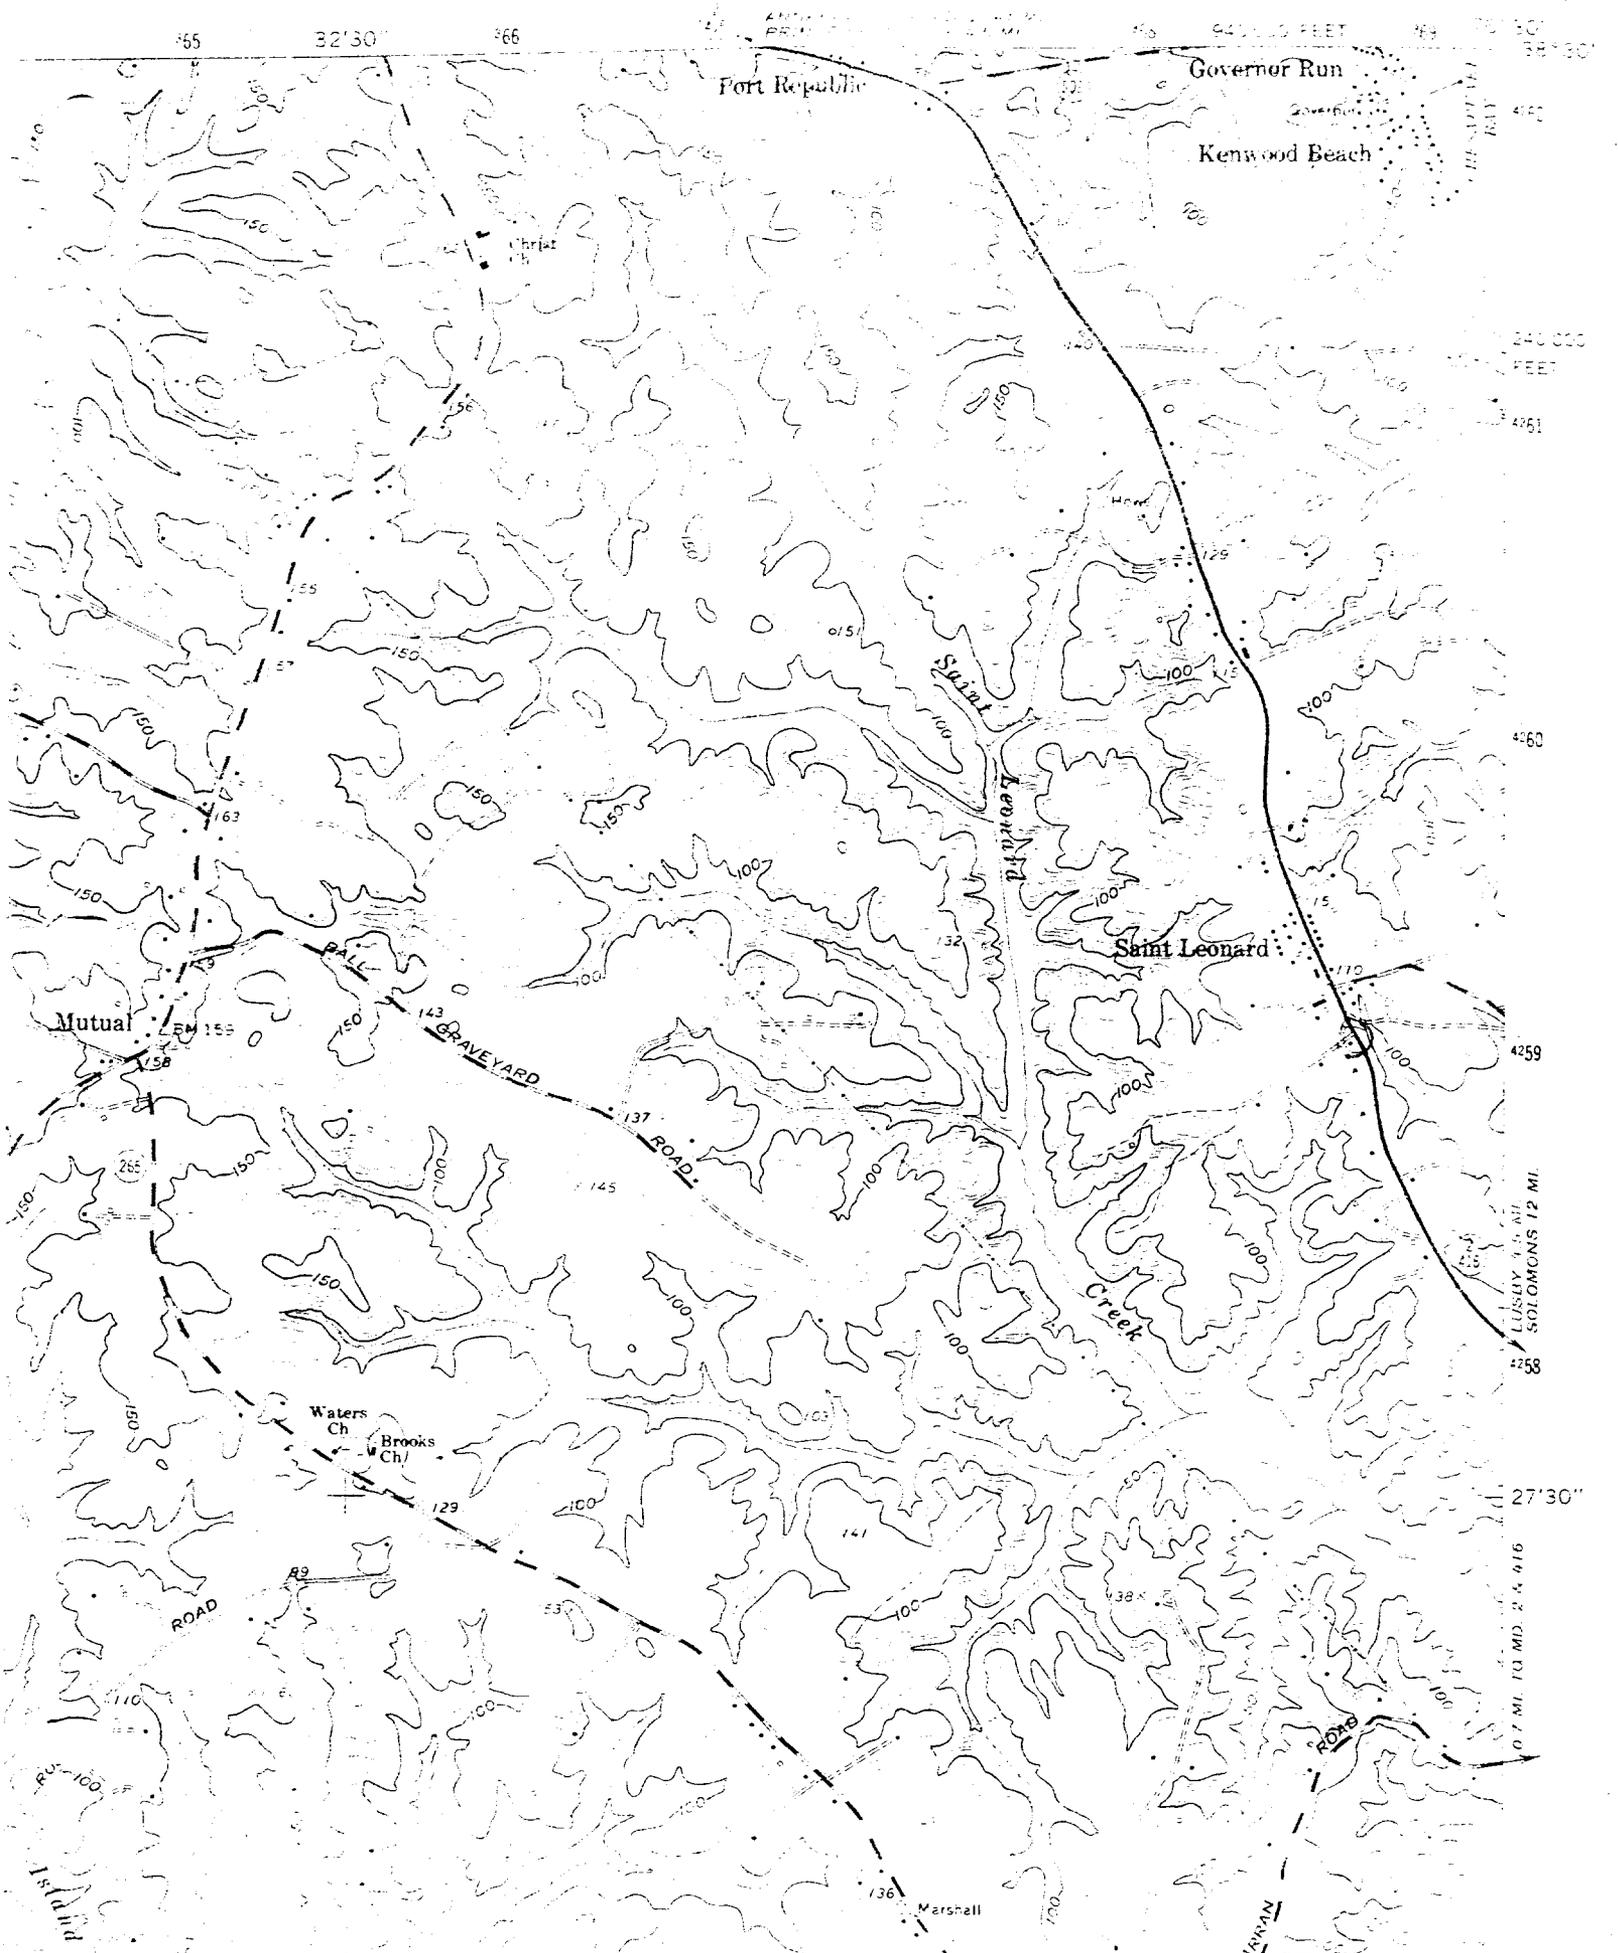

0.7 MI TO MD 2 4 916
1.2 MI TO MD 2 4 916

27'30"

4258
4259
4360
4361
240 000
FEET



CT-158

CT-158 St. Leonard Polling House
St. Leonard, Maryland
Orlando Ridout V Spring 1983
View from Northeast



CT-158

CT-158 St. Leonard Polling House
St. Leonard, Maryland
Orlando Ridout V Spring 1983
View from Southwest